User's Guide

H.264 Digital Video Recorder

About This User's Guide

Before operating the unit, please read this user's guide thoroughly and retain it for future reference.

Warning

Cautions

1. **Read User Guide** – After unpacking this product, please read the user guide carefully, and follow all the operating and other instructions.
2. **Power Sources** – This product should be operated only from the type of power source indicated on the label. If not sure of the type of power supply, consult with the product dealer.
3. **Ventilation** – Slots and openings on the unit are for ventilation and to ensure reliable operating of the product and to protect it from overheating, and these openings must not be blocked or covered. The product is recommended to be placed in a well ventilated area.
4. **Heat** – The product should be placed away from heat sources such as radiators, stoves, and other products that produce heat.
5. **Water and Moisture** – Do not use this product near water. Do not exceed the humidity specifications for the product as detailed in the user guide.
6. **Cleaning** – Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use only compressed air to clean the product.
7. **Power Cord Protection** – Power-supply cords should not be routed so that they are likely to be walked on or pinched by items placed against them.
8. **Overloading** – DO not overload wall outlets; extension cords, or uninterruptible power supply.
9. **Lighting** – For added protection for this product during a storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet. This will prevent damage to the product due to lighting and power line surges.
10. **Object and Liquid** – Never insert foreign objects into the DVR, as it may touch dangerous voltage points or short-out parts that could result in a fire or electrical shock. Never spill liquid of any kind on the product.
11. **Accessories** – Do not place this product on an unstable cart; stand, tripod, bracket, or table. The product may fall, causing serious personal injury and serious damage to the product.
12. **Disc Tray** – Keep fingers well clear of the disc tray as it is closing. Neglecting to do so may cause serious personal injury and serious damage to the product.
13. **Burden** – No not place any heavy objects on the product.
14. **Disc** – Do not use a cracked, deformed, or repaired disc. These discs can be easily broken and may cause serious personal injury and cause product malfunction.
15. **Replaceable Batteries** – **CAUTION:** Risk of Explosion if the battery is replaced by an incorrect type. Dispose used batteries according to the instructions.
16. **Servicing** – Do not attempt to service this product. Opening or removing covers may expose the user to dangerous voltage or other hazards. Unauthorized substitutions may result in fire electric shock or other hazards. Serving should be performed only by a qualified and experienced personnel.

Notes

Handling

- Please retain the original shipping carton and/or packing materials supplied with this product. To ensure the integrity of this product when shipping or moving, repackage the unit as it was originally received. Do not use liquids, such as aerosol spray, near this product. Do not leave rubber or plastic objects in contact with this product for long periods of time. The product may become warm after long periods of use.

Locating

- Place the unit on a level surface. Do not place the unit on a shaky or unstable surface such as a wobbling table or an inclined stand. If the unit is placed next to a TV, radio, or VCR, the playback picture may become poor and the sound may be distorted. If this happens, place the unit away from the TV, radio, or VCR.

Maintenance

- This DVR is designed to last for long periods of time. To keep the DVR always operational, we recommend regular inspection maintenance (Cleaning or replacement). For details, contact the nearest dealer.

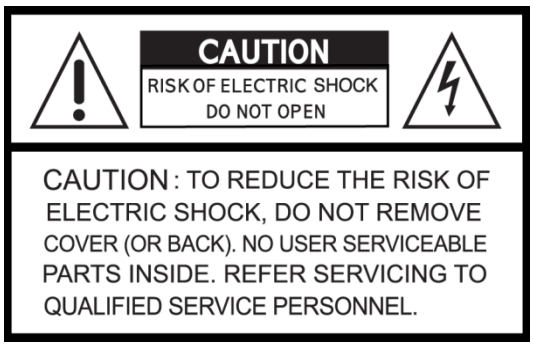
CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN
CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

Table of Contents

Product Components 7
1. Features 8
2. Preparation 9
2-1. DVD-RW Installation 9
2-2. Hard Drive Installation 10
2-3. Booting the DVR and Basic Time Setting 11
2-4. Setting Daylight Saving Time 11
2-5. Setting NTP (Network Time Protocol) 12
3. Setting up the DVR 15
3-1. Setup – Main screen and Menu Tree 15
3-2. Setup – Display Mode 18
3-3. Setup – Record Mode 19
3-3-1. Recording Schedules 20
3-4. Setup – Device Mode 22
3-4-1. ALARM-OUT 23
3-4-2 CONTROLLER & PTZ Setup 23
3-4-3. Motion Zone Setup 24
3-5. Setup – Storage Mode 26
3-6. Setup – System Mode 27
3-7. Setup – Security Mode 30
3-8. Setup – Network Mode 32
3-8-1. DDNS 33
3-8-2. Network Ports 34
3-8-3. Network Stream 34
3-9. Setup - CONFIG Mode 35
3-10. Quick Setup 37
4. Live, Search and Playback 38
4-1. Live Viewing Screen 38
4-2. SEARCH Screen 39
4-2-1. TIME-LINE Search 40
4-2-2. Event Search 41
4-2-3. Go To First Time 42
4-2-4. Go To Last Time 42
4-2-5. Go To Specific Time 43
4-2-6. Archive Search 43
4-2-7. Log Search 44
4-3. Play Mode 45
5. PTZ Control 46

6. Back Up....47
6-1. Still Image Backup onto USB Flash Drive....47
6-2. Video Backup onto USB Flash Drive....47
6-3. Transferring Still Images or Video from the ARCHIVE List....48
6-4. Playback of Backup Video....48
7. Single Site Network Viewer....50
7-1. PC Requirements....50
7-2. Installing the Network Viewer....51
7-3. Live Monitoring Mode and Functions.....52
7-4. Bi-directional Audio....54
7-5. Remote Search Mode and Functions....54
7-6. PC System Configuration....58
8. Multi-Sites Network Viewer....61
8-1. Overview....61
8-2. Minimum PC Requirements....61
8-3. Installation of the Program....61
8-4. Live Window....63
8-4-1. Main User Interface....63
8-4-2. Control Buttons....63
8-5. Search and Playback Window....65
8-5-1. Main User Interface....65
8-5-2. Main Control Panel....65
8-6. Operation....67
8-6-1. Addition, Delete, and Modify of DVR Sites....67
8-6-2. Connect and Disconnect....69
8-6-3. Still-image Capture During Live....70
8-6-4. Recording Video on Local PC during Live....71
8-6-5. Local Playback and Remote Playback....73
8-6-6. AVI Backup During Playback....75
9. Web-Browser Viewer....77
10. Remote Setup....80
10-1. DISPLAY....81
10-2. RECORD....82
10-3. DEVICE....83
10-4. STORAGE....84
10-5. SYSTEM....85
10-6. SECURITY....87
10-7. NETWORK....88
10-8. REMOTE UPGRADE....89
10-9. INFORMATION....89
11. Mobile Phone Viewer....90

11-1. Installing the Viewer 90
11-2. Viewer for Android 90
11-2-1. Live 90
11-2-2.PTZ Control 91
11-2-3. Playback 92
11-2-4. Screen Shot and Viewer 93
11-3. Viewer for iPhone 93
11-3-1. Live 93
11-3-2.PTZ Control 94
11-3-3. Playback 94
APPENDIX 96
NETWORK SETUP 96
NETWORK SETUP – Using Manufacturer's DDNS 97
NETWORK SETUP – Using Public DDNS 98
NETWORK ACCESS via MOBILE PHONE 99
NETWORK ACCESS via WEB BROWSER 100
NETWORK ACCESS via WEB BROWSER 102
How to make a backup 104
How to playback a Proprietary Format video in PC 106
DVR Compatible Hard Disk Drives 107

Product Components

Please make sure the following components are included as specified below.

DVR Set	Client Software CD
Quick Guide	Mouse
Remote Control , Battery1.5V	SATA Cable, SATA Power Cable
 HDD Mounting Brackets & Screws	 HDD & DVD-RW Mounting Bracket
 HDD & DVD-RW Mounting Screws	Power Cable & Power Adapter

1. Features

- H.264 video compression
- HDMI 1080P Video Output
- QUADPLEX: Simultaneous live or playback while recording, network transfer, and backup
- USB 2.0 port for backup, firmware upgrade, configuration export/import, or USB mouse
- Individual channel operation such as FPS, quality, recording mode, & detection zone
- Various network access: Network client SW, web-viewer, smart phone APP, and CMS
- Remote setup and remote upgrade
- Remote access via PC, MAC®, or smart phones
- Recording by schedule, continuous, alarm, motion, or continuous
- Free DDNS server
- Network Bandwidth control
- E-mail event notification
- NTP (Network Time Protocol)
- Watermark
- Synchronized audio
- Bi-directional audio
- Time stamp over backup data
- Easy and various data backup via DVD, USB flash drive, USB external HDD, and network
- HDD S.M.A.R.T status check and alert via e-mail or internal beep
- USB mouse, IR remote control
- Multi OSD languages
- Made in Korea

2. Preparation

2-1. DVD-RW Installation

1. Remove the screws and the top cover as specified below.

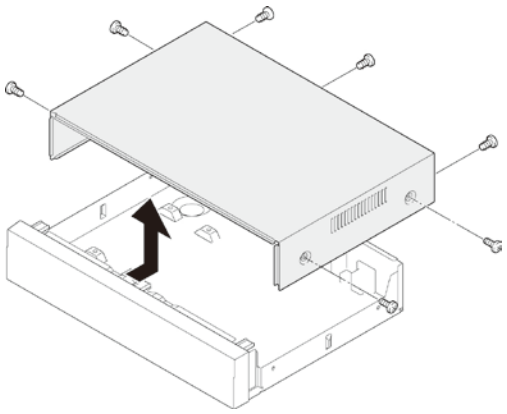

2. Install the DVD-RW mounting bracket to the DVD-RW by using the mounting bracket screws as specified below.

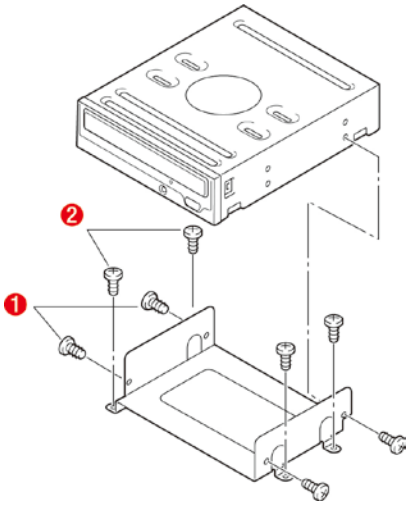

3. Connect the DVD-RW Data Power Cable to both the DVD-RW and main board.

2-2. Hard Drive Installation

1. **Before installing bracket and screws onto the HDD.**

2. **Install the mounting bracket on the HDD.**

3. **Installation HDD and Bracket onto base case (Inside)**

4. **Installation HDD and Bracket onto base case (Outside)**

5. **Connect the Data Power cable to the HDD.**

6. **Installed HDD and DVD-RW.**

2-3. Booting the DVR and Basic Time Setting

1. During the first start up, the following message will be displayed.

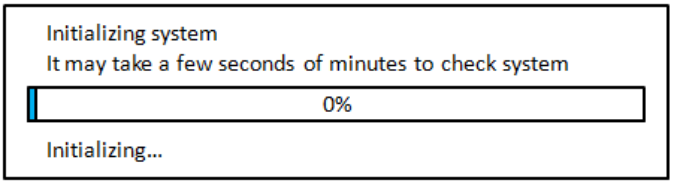

2. After the system initializing is completed, select the language and set date and time as specified below.

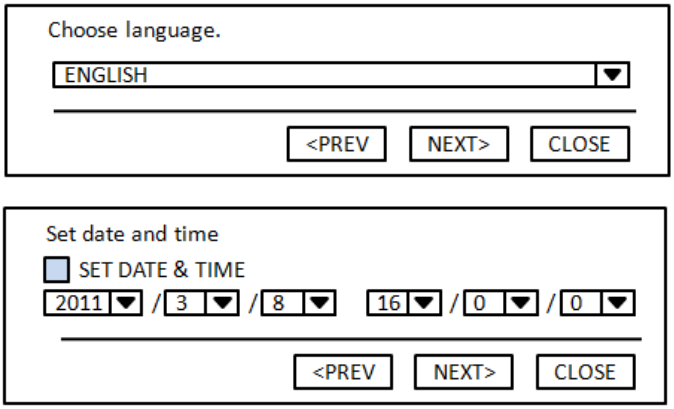

2-4. Setting Daylight Saving Time

If the DVR is to be set Day Light Saving Time and be synchronized NTP (Network Time Protocol), take next steps.

1. Click a mouse-right button or SETUP button on the front panel of DVR to enter the SETUP mode.

The default Password is “1111”.

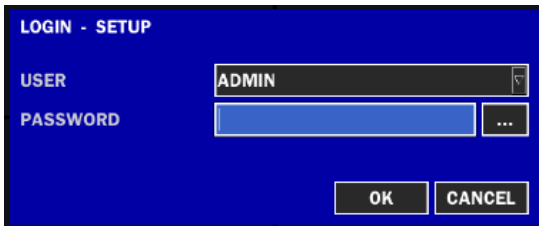

2. Go to SETUP>SYSTEM>SET DATE & TIME

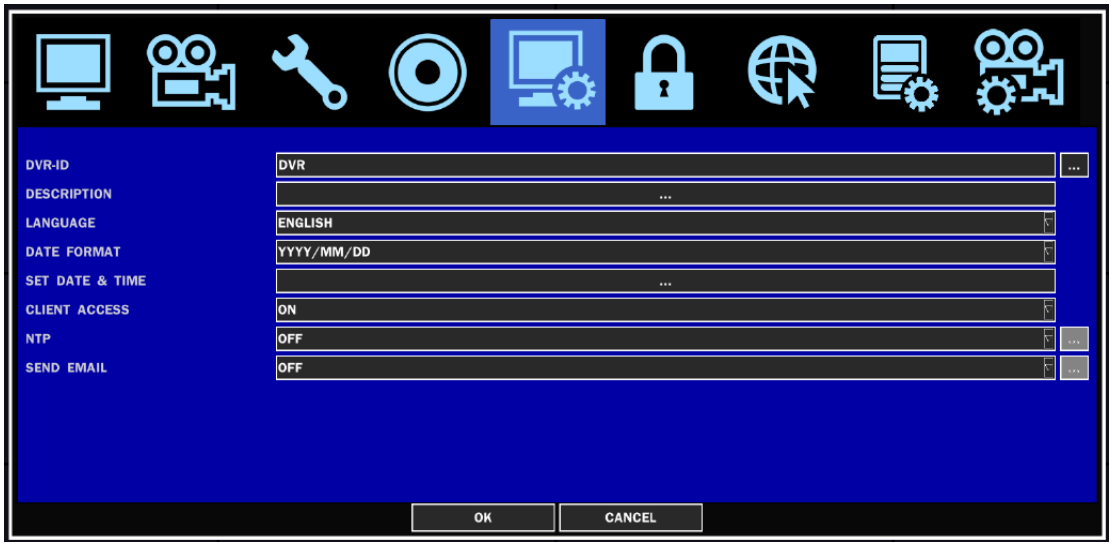

3. Select DAYLIGHT SAVING.

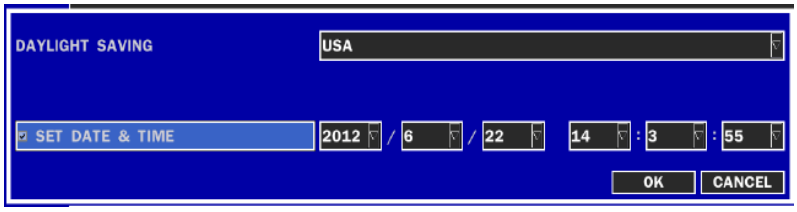

2-5. Setting NTP (Network Time Protocol)

1. When the DVR is connected with internet and the DVR need to be syncronized with NTP (Network Time Protocol), set SETUP>SYSTEM>NTP ON.

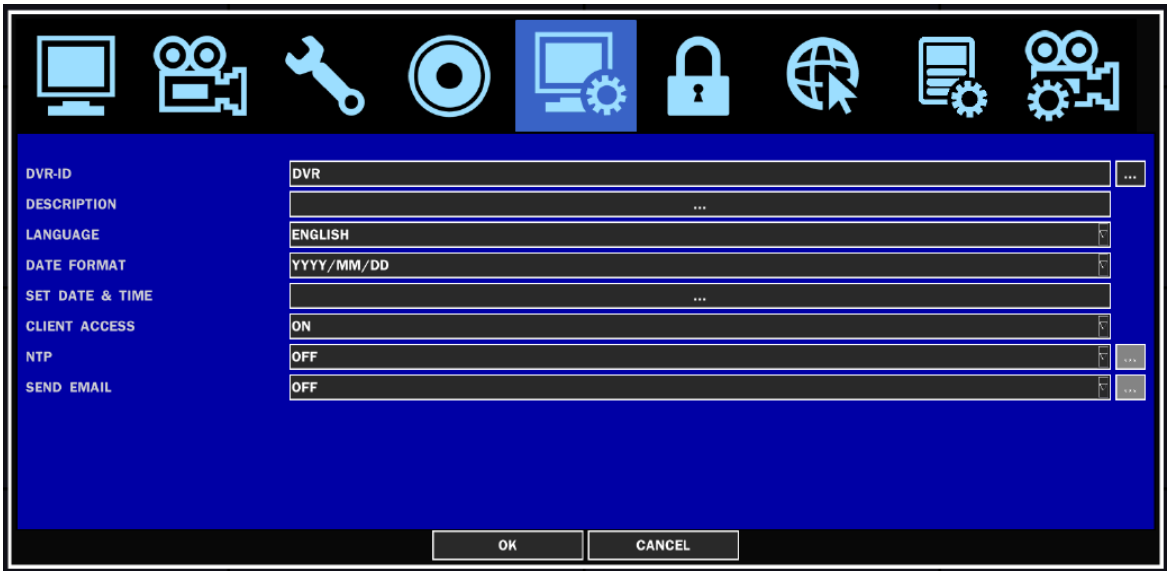

2. Select proper TIME ZONE time.

Pacific Time Zone

- **Los Angles, CA, USA : GMT - 8:00 for Standard time / GMT - 7:00 for Daylight time**

Mountain Time Zone

- **Denver, CO, USA : GMT - 6:00 for Standard time / GMT - 5:00 for Daylight time**

Central Time Zone

- **Chicago, IL, USA : GMT - 7:00 for Standard time / GMT - 6:00 for Daylight time**

Eastern Time Zone

- **Newyork, NY, USA : GMT - 5:00 for Standard time / GMT - 4:00 for Daylight time**

	State	Standard Time	Daylight-Saving Time
AL	Alabama	GMT-6	GMT-5
AK	Alaska	GMT-9	GMT-8
AK	Alaska (Aleutian Islands)	GMT-10	NA
AZ	Arizona	GMT-7	NA
AZ	Arizona (Navajo)	GMT-7	GMT-6
AR	Arkansas	GMT-6	GMT-5
CA	California	GMT-8	GMT-7
CO	Colorado	GMT-7	GMT-6
CT	Connecticut	GMT-5	GMT-4
DC	District of Columbia	GMT-5	GMT-4
DE	Delaware	GMT-5	GMT-4
FL	Florida	GMT-5	GMT-4
FL	Florida (W)	GMT-6	GMT-5
GA	Georgia	GMT-5	GMT-4
HI	Hawaii	GMT-10	NA
ID	Idaho (N)	GMT-8	GMT-7
ID	Idaho (S)	GMT-7	GMT-6
IL	Illinois	GMT-6	GMT-5
IN	Indiana	GMT-5	GMT-4
IN	Indiana (SW / NW)	GMT-6	GMT-5
IA	Iowa	GMT-6	GMT-5
KS	Kansas	GMT-6	GMT-5
KS	Kansas (W)	GMT-7	GMT-6
KY	Kentucky (E)	GMT-5	GMT-4
KY	Kentucky (W)	GMT-6	GMT-5
LA	Louisiana	GMT-6	GMT-5
ME	Maine	GMT-5	GMT-4
MD	Maryland	GMT-5	GMT-4
MA	Massachusetts	GMT-5	GMT-4
MI	Michigan	GMT-5	GMT-4
MI	Michigan (W)	GMT-6	GMT-5
MN	Minnesota	GMT-6	GMT-5
MS	Mississippi	GMT-6	GMT-5
MO	Missouri	GMT-6	GMT-5
MT	Montana	GMT-7	GMT-6
NE	Nebraska	GMT-6	GMT-5
NE	Nebraska (W)	GMT-7	GMT-6
NV	Nevada	GMT-8	GMT-7
NH	New Hampshire	GMT-5	GMT-4

NJ	New Jersey	GMT-5	GMT-4
NM	New Mexico	GMT-7	GMT-6
NY	New York	GMT-5	GMT-4
NC	North Carolina	GMT-5	GMT-4
ND	North Dakota	GMT-6	GMT-5
ND	North Dakota (W)	GMT-7	GMT-6
OH	Ohio	GMT-5	GMT-4
OK	Oklahoma	GMT-6	GMT-5
OR	Oregon	GMT-8	GMT-7
OR	Oregon (E)	GMT-7	GMT-6
PA	Pennsylvania	GMT-5	GMT-4
RI	Rhode Island	GMT-5	GMT-4
SC	South Carolina	GMT-5	GMT-4
SD	South Dakota (E)	GMT-6	GMT-5
SD	South Dakota (W)	GMT-7	GMT-6
TN	Tennessee (E)	GMT-5	GMT-4
TN	Tennessee (W)	GMT-6	GMT-5
TX	Texas	GMT-6	GMT-5
TX	Texas (W)	GMT-7	GMT-6
UT	Utah	GMT-7	GMT-6
VT	Vermont	GMT-5	GMT-4
VA	Virginia	GMT-5	GMT-4
WA	Washington	GMT-8	GMT-7
WV	West Virginia	GMT-5	GMT-4
WI	Wisconsin	GMT-6	GMT-5
WY	Wyoming	GMT-7	GMT-6

NOTE: If you want the unit to automatically synchronize the local time, the Time Zone must be properly set according to your local Time Zone.

3. Setting up the DVR

The following sections detail the initial setup of the DVR.

3-1. Setup – Main screen and Menu Tree

To enter the setup menu, right click on the mouse and select setup from the submenu or press the setup button on the front panel or the remote control.

Figure 3.1.1. Setup Menu Tree

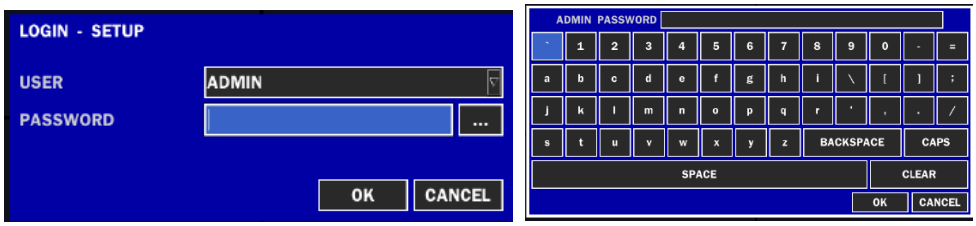

When the DVR prompts the LOG-IN window, enter the PASSWORD using the virtual keyboard, or the front panel, or the remote control. The factory default password is 1111. It is highly recommended to assign a new password to protect the system. User can assign a new password in SECURITY setup menu.

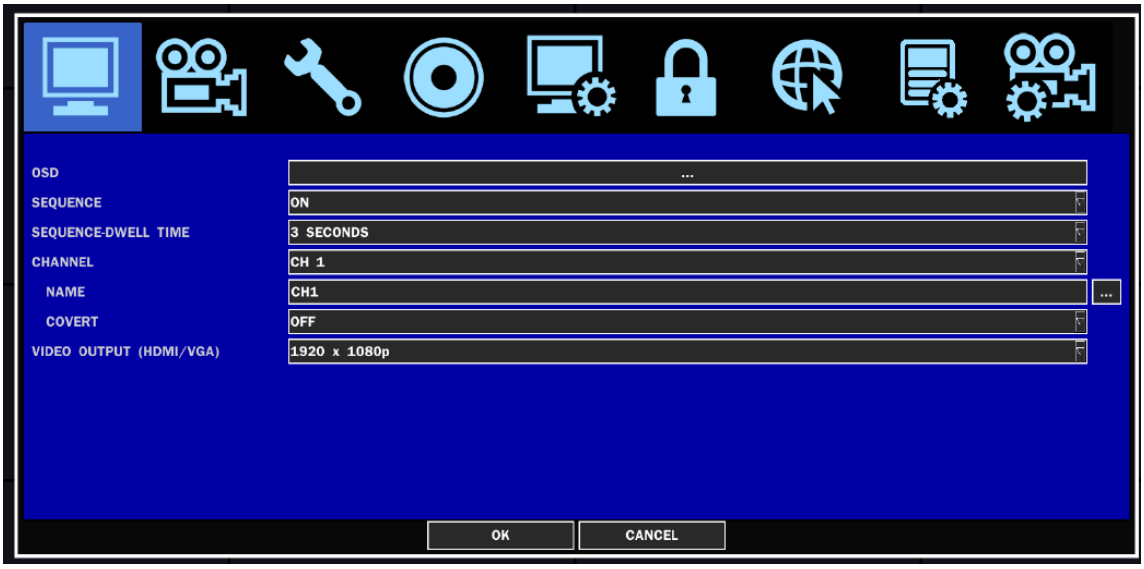

- DISPLAY
  - OSD
  - SEQUENCE
  - SEQUENCE DWELL TIME
  - CHANNEL
    - NAME
    - COVERT
  - VIDEO OUTPUT (HDMI /VGA)
- RECORD
  - CHANNEL
    - RECORD MODE
    - RESOLUTION
    - FRAME RATE
    - QUALITY
    - RECORDING
    - SENSOR RECORDING
    - PRE RECORD
    - POST EVENT RECORD
    - AUDIO
    - SCHEDULE
- DEVICE
  - ALARM OUT
    - SENSOR IN
    - MOTION ON
    - VIDEO LOSS ON
    - ALARM DURATION
    - ERROR ALARM
  - CONTROLLER & PTZ
    - CONTROLLE
      - SPEED
      - ID
    - CHANNEL
      - CAMERA
      - SPEED
      - ID
  - CHANNEL
    - MOTION ZONE
    - MOTION SENSITIVITY

- KEY TONE
- REMOTE CONTROLLER ID
- SENSOR
    - TYPE

- STORAGE
    - OVERWRITE
    - DISK FORMAT
    - DISK INFO
    - RECORDING LIMIT
        - RECORDING LIMIT DAYS
    - S.M.A.R.T
- SYSTEM
    - DVR-ID
    - DESCRIPTION
    - LANGUAGE
    - DATE FORMAT
    - SET DATE & TIME
    - CLIENT ACCESS
    - NTP
    - SEND EMAIL
- SECURITY
    - USER AUTHENTICATION
    - USER PASSOWRD
    - PLAYBACK AUTHORITY
    - NETWORK LIVE AUTHORITY
- NETWORK
    - PORT
    - NETWORK AUDIO PORT
    - WEB PORT
    - NETWORK TYPE
    - DDNS
    - NETWORK STREAM
- CONFIG
    - SAVE SETUP TO A USB
    - LOAD SETUP FROM A USB
    - LOAD DEFAULT

- LOAD FACTORY DEFAULT
- SOFTWARE UPGRADE

■ QUICK SETUP

- USE QUICK SETUP
  - INPUT DESIRED DAYS
- CUSTOMER SETTINGS
  - RECORD MODE
  - RESOLUTION
  - FRAME RATE
  - QUALITY
  - RECORDING
  - DAYS TO RECORD

3-2. Setup – Display Mode

In the SETUP menu, select the DISPLAY tab . Then, the DISPLAY menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

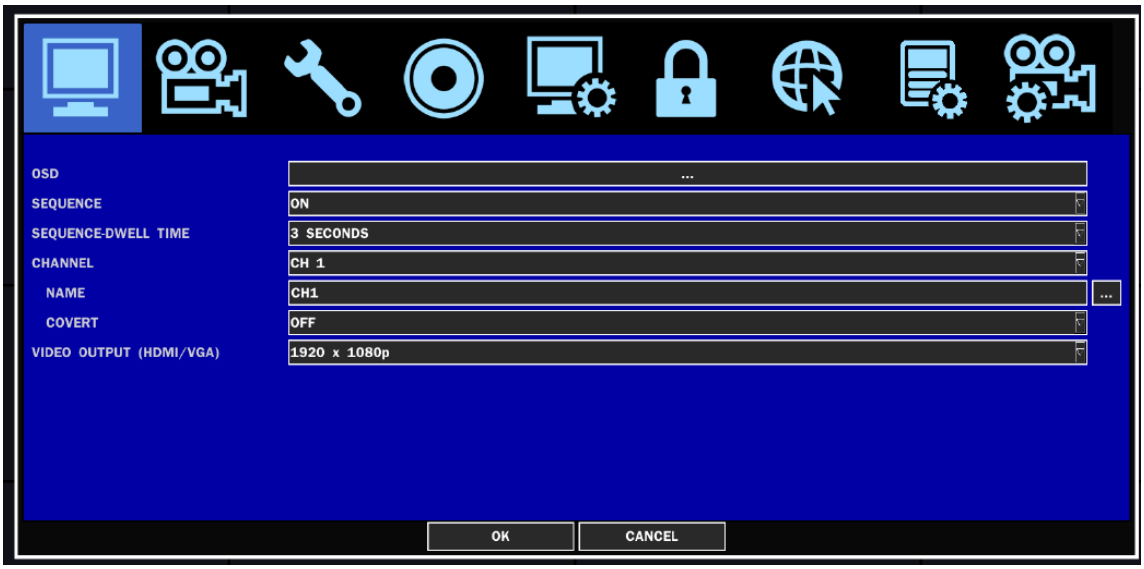

Figure 3.2.1. Display Mode Setup Screen

Table 3.2.1. Menu Items in DISPLAY Mode Setup

Item	Description
OSD	Enable/disable on-screen-display such the channel name, icon, video loss and the status bar. 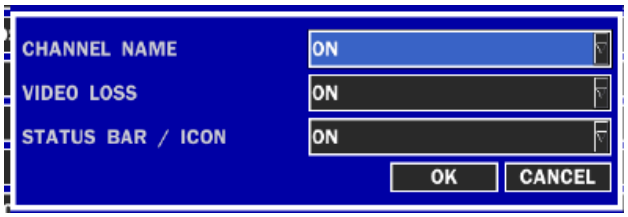

SEQUENCE	Enable/disable sequential display of video in full screen mode.
SEQ-DWELL TIME	Set the dwell time of each, quad or 9 channels display in sequential display mode. (3-60seconds)
CHANNEL	Select a channel for applying the channel name and the covert function, using the mouse or control button on the remote control.
NAME	Set the channel name. Press the right square button and set the channel name. The name can be made by 10 characters at most. **Warning!** **The recording will stop for s few seconds after changing the channel name.**
COVERT	Enable/disable display of the specified video channel in live display mode.
BRIGHTNESS	Change the brightness value of the specified channel. (0~100)
CONTRAST	Change the contrast value of the specified channel. (0~100)
HUE	Change the hue value of the specified channel. (0~100)
SATURATION	Change the saturation value of the specified channel. (0~100)
VIDEO OUTPUT (HDMI/VGA)	Allows user to set monitor output resolution from 720p 50Hz/60Hz, 1080i 50Hz/60Hz, 1080p 50Hz/60Hz

3-3. Setup – Record Mode

In the SETUP menu, select the RECORD tab . Then, the RECORD menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

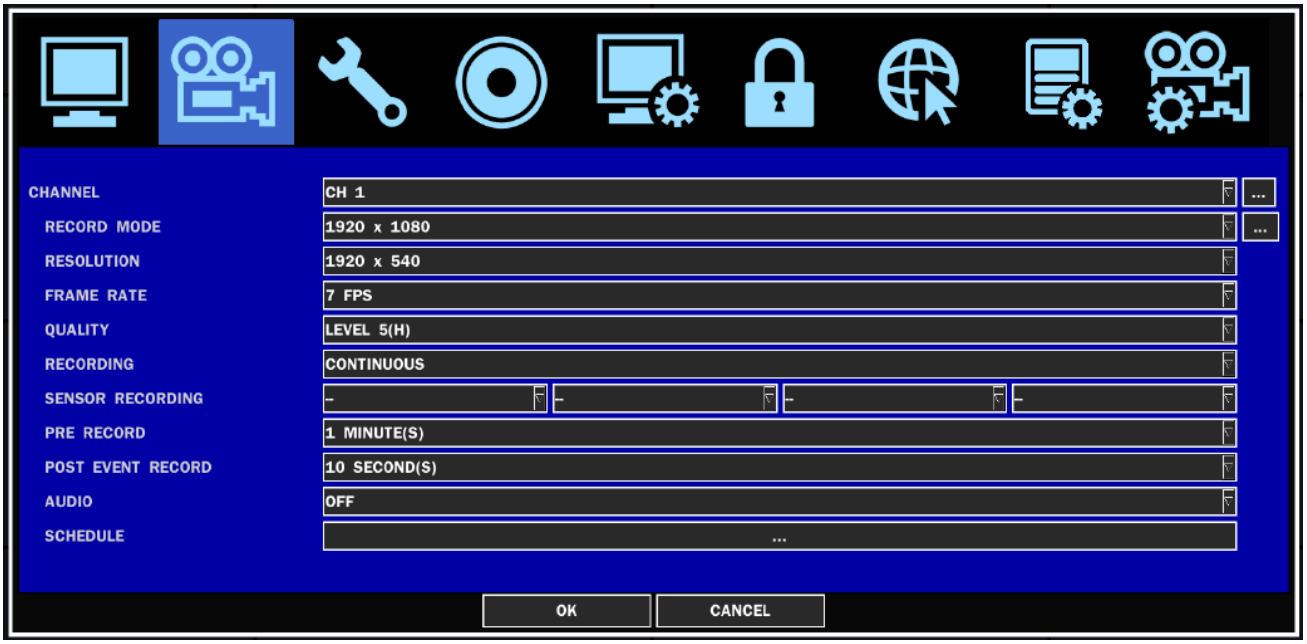

Figure 3.3.1. Recording Mode Setup Screen

Table 3.3.1. Menu Items in Recording Mode Setup

Menu Item	Description
CHANNEL	Select a channel for applying the following settings using the mouse or the control button on the remote control. Press the right square button to change the setting value of all channels at once. Once you the value has been changed, select OK to confirm the changes. **RESOLUTION, FRAME RATE, QUALITY, RECORDING, PRE RECORD and POST EVENT RECORD** 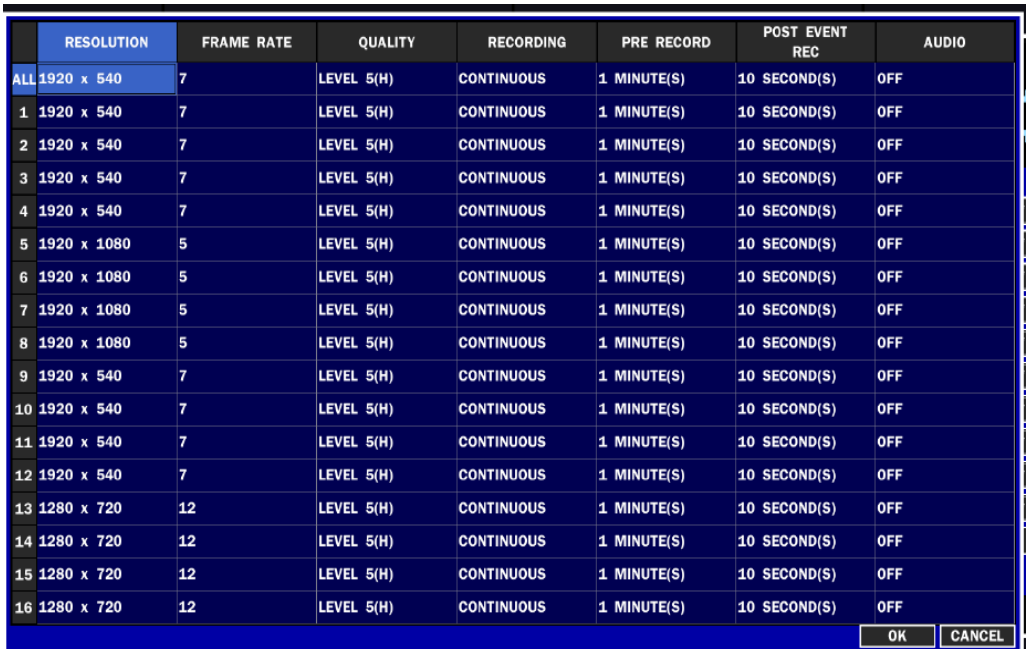
RESOLUTION	Select recording resolution using the mouse or the control button on the remote control.
QUALITY	Select the recording quality for the specified channel. LEVEL 1 ~ LEVEL 5 (Allows the user to change the recording QUALITY of the selected CHANNEL)
RECORDING	Assign the recording mode for each channel. Options are: Continuous, Motion, Sensor, Schedule, or Disable.
SENSOR RECORDING	In case of selecting SENSOR for recording mode, allocate the number of sensor to trigger the recording.
PRE RECORD	Enable/disable pre-event recording. Pre-event recording time is 5 seconds to 20 Minutes.
POST EVENT RECORD	Set the post event recording time duration for the specified channel. (10~60 seconds)
AUDIO	Enable/disable audio recording for the specified channel.
SCHEDULE	Set the recording schedule. Press SEL to enter the schedule setup screen.

RESOLUTION FRAME RATE QUALITY RECORDING PRE RECORD POST EVENT REC AUDIO
ALL 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
1 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
2 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
3 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
4 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
5 1920 x 1080 5 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
6 1920 x 1080 5 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
7 1920 x 1080 5 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
8 1920 x 1080 5 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
9 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
10 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
11 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
12 1920 x 540 7 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
13 1280 x 720 12 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
14 1280 x 720 12 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
15 1280 x 720 12 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
16 1280 x 720 12 LEVEL 5(H) CONTINUOUS 1 MINUTE(S) 10 SECOND(S) OFF
OK CANCEL

3-3-1. Recording Schedules

To setup a recording schedule, select SCHEDULE in the RECORD menu. Navigate through the menu items using the

mouse or the control button on the remote control.

[**CHANNEL**]: Select the specific channel.

[**Setup**]: Set up using the left button of the mouse to section under the specific time. It can set the all section under the specific day or time at a time when pressing the specific day or time. It is also possible to set up recording modes of various type using CONTINUOUS (Green), Motion (Yellow) and Sensor (Red). Left-Click and drag the mouse to change the schedule for more than one timeslot.

[**COPY SCHEDULE**]: To copy the schedule setup from one channel to another, select the channel to copy using the mouse or the buttons on the remote control, and select to channel to copy to and press the COPY button.

Select OK to confirm the changes.

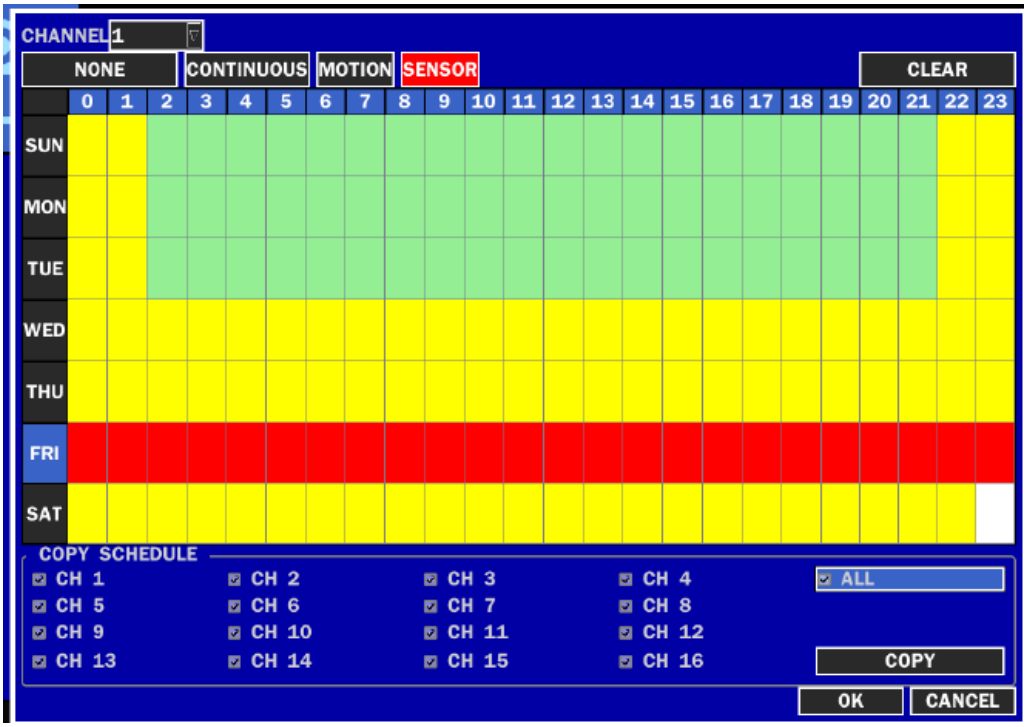

Figure 3.3.2. Schedule Recording Setup Screen

3-4. Setup – Device Mode

In the SETUP menu, select the DEVICE tab . Then, the device menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

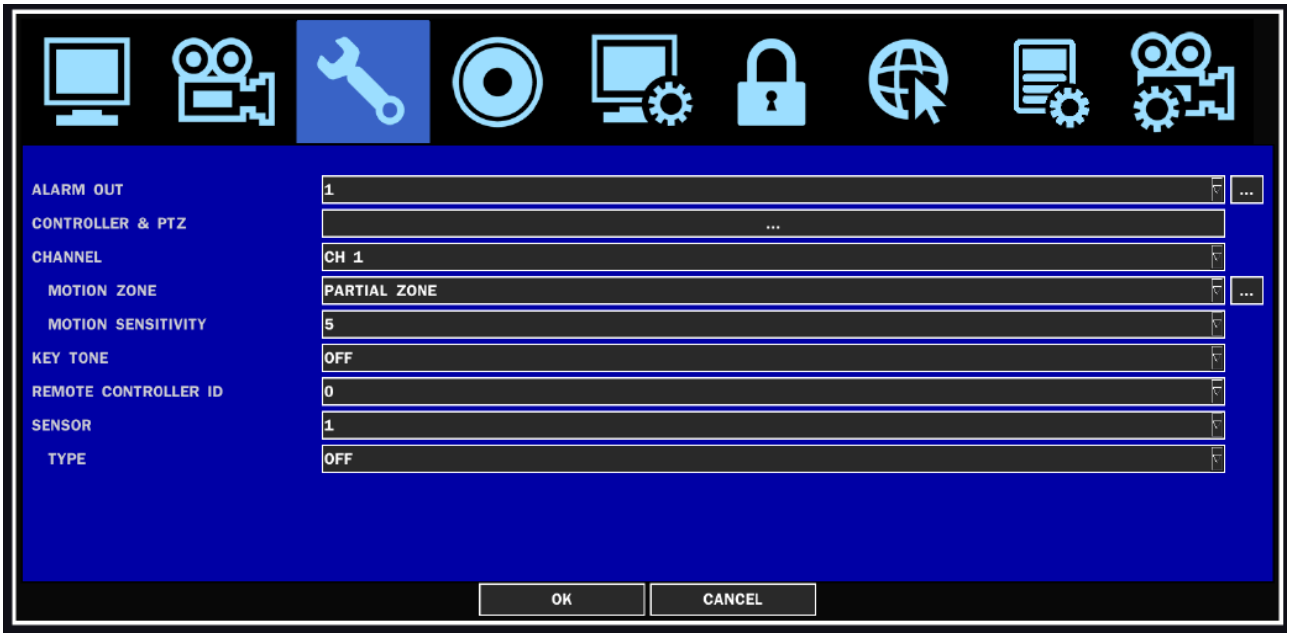

Figure 3.4.1. Device Mode Setup Screen

Table 3.4.1. Menu Items in Device Setup Screen

Item	Description
ALARM OUT	Set/allocate the alarm triggers, Sensor, Motion, Video loss, and Alarm duration for each alarm-out.
CONTROLLER & PTZ	Set the controller to control DVR and PTZ cameras.
CHANNEL	Select specified channel for motion zone setup.
MOTION ZONE	Select either Full Zone or Partial Zone for motion sensing.
MOTION SENSITIVITY	Set the motion sensitivity for the specified channel. Control the motion sensitivity from 1 to 9.
KEY TONE	Enable/disable key tone.
REMOTE CONTROLLER ID	Select an ID of remote control. 1. Select ID number. 2. Press the same number as ID set in DVR on the remote control. 3. An icon will be displayed on the Live Screen that corresponds to the remote control ID number.0 The options are from 0 to 99
SENSOR	Select sensor number to set the type of sensor.
TYPE	Set the type of sensor for the specified channel. Options are: OFF, NORMAL OPEN, or NORMAL CLOSE.

3-4-1. ALARM-OUT

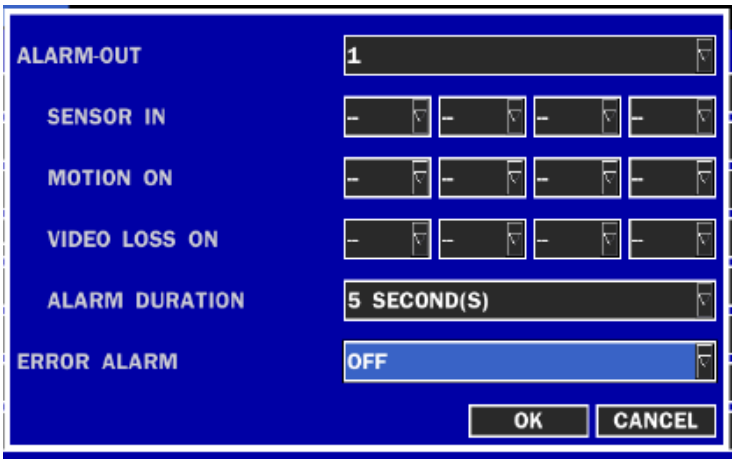

Figure 3.4.2. ALARM-OUT Setup Screen

Table 3.4.2. Menu Item in ALARM-OUT Setup Screen

Item	Description
ALARM OUT	Select an Alarm out number.
SENSOR IN	Enable Alarm Out by Sensor up to 16 Inputs.
MOTION ON	Enable Alarm Out by Camera Motion up to 16 cameras.
VIDEO LOSS ON	Enable Alarm Out by Video Loss up to 16 cameras.
ALARM DURATION	Set the alarm dwell time from 5 to 60 seconds.
ERROR ALARM	Set the error type for the alarm activation. The options are OFF, ALL, HDD ERROR and VIDEO LOSS.

3-4-2 CONTROLLER & PTZ Setup

To control the PTZ functions of the camera or to control the DVR using the controller, connect a controller to the RS-485 port.

Connect the RS-485 cables of the PTZ camera to the RS-485 port on the rear panel.

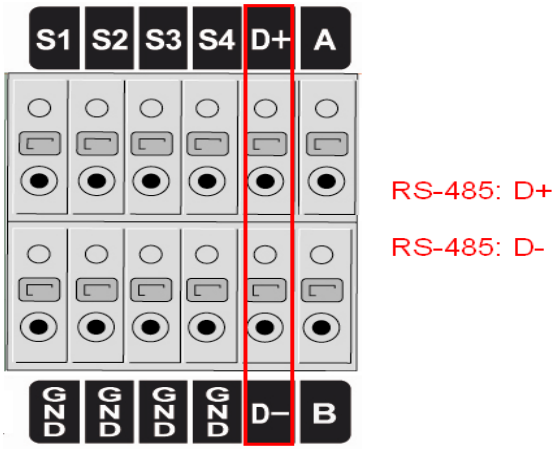

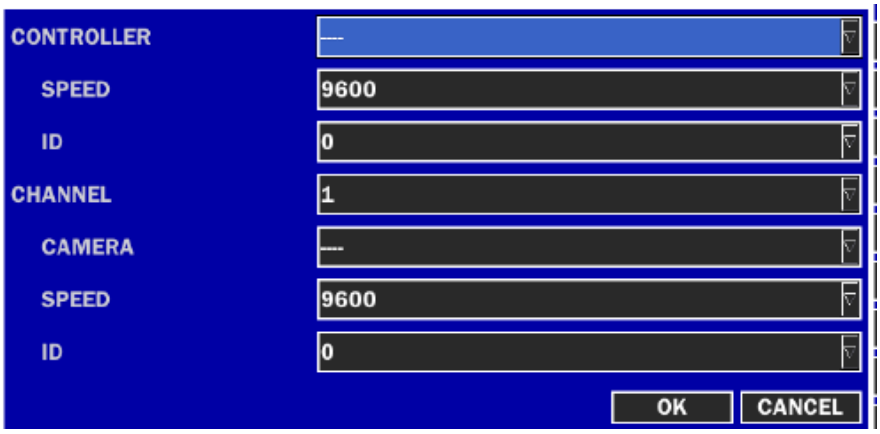

Figure 3.4.4. Controller Setup Screen

You can select the controller model that is compatible with the DVR.

The following options are available on the CONTROLLER setup.

CONTROLLER (Controller model that is compatible)

SPEED (Baud Rate) (19200, 14400, 9600, 4800, 2400)

ID (0-63)

You can select or set the protocol type of the camera that is the same as the one installed on the site. If the camera has a specific camera ID, select the camera ID using the mouse or the control button of the remote control.

The following options are available on the PTZ setup.

CHANNEL (Channel number that the PTZ is connected to)

CAMERA (Protocol type)

SPEED (Baud Rate) (19200, 14400, 9600, 4800, 2400)

ID (0-63)

Note: For speed dome cameras that support RS-485, connect them directly to the RS-485 port. If the camera is controlled with RS-232C, use a RS-485 to RS-232C signal converter.

3-4-3. Motion Zone Setup

Select MOTION ZONE using the mouse or the control button on the remote control and select either PARTIAL ZONE or FULL ZONE using the mouse control. The default value is FULL ZONE.

If FULL ZONE is selected, the motion zone grid screen is not displayed. Only set the level of sensitivity for MOTION SENSITIVITY.

FULL ZONE: The motion sensor is active on the whole screen.

PARTIAL ZONE: The motion sensor is active in the set detection frame.

Select the motion detection position using the mouse or the control button on the remote control. Then left click on the mouse or left click and drag the mouse pointer to select or deselect the area. Highlighted area indicates the partial motion detection zone. Press the ESC button or right click on the mouse to return to the previous menu.

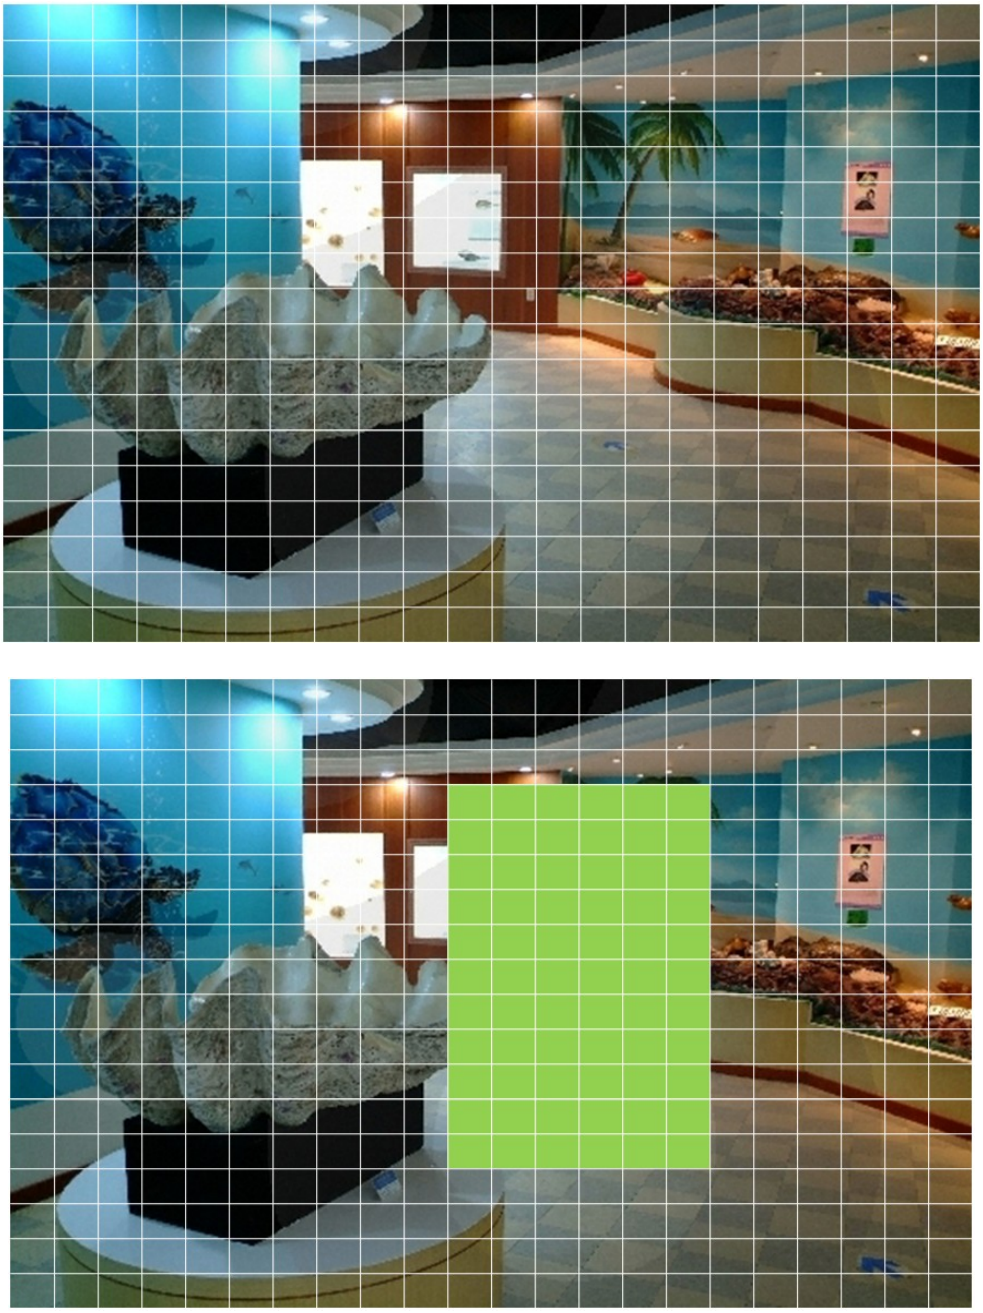

Figure 3.4.5. Motion Zone Grid Screen

3-5. Setup – Storage Mode

In the SETUP menu, select the STORAGE tab . Then, the STORAGE menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

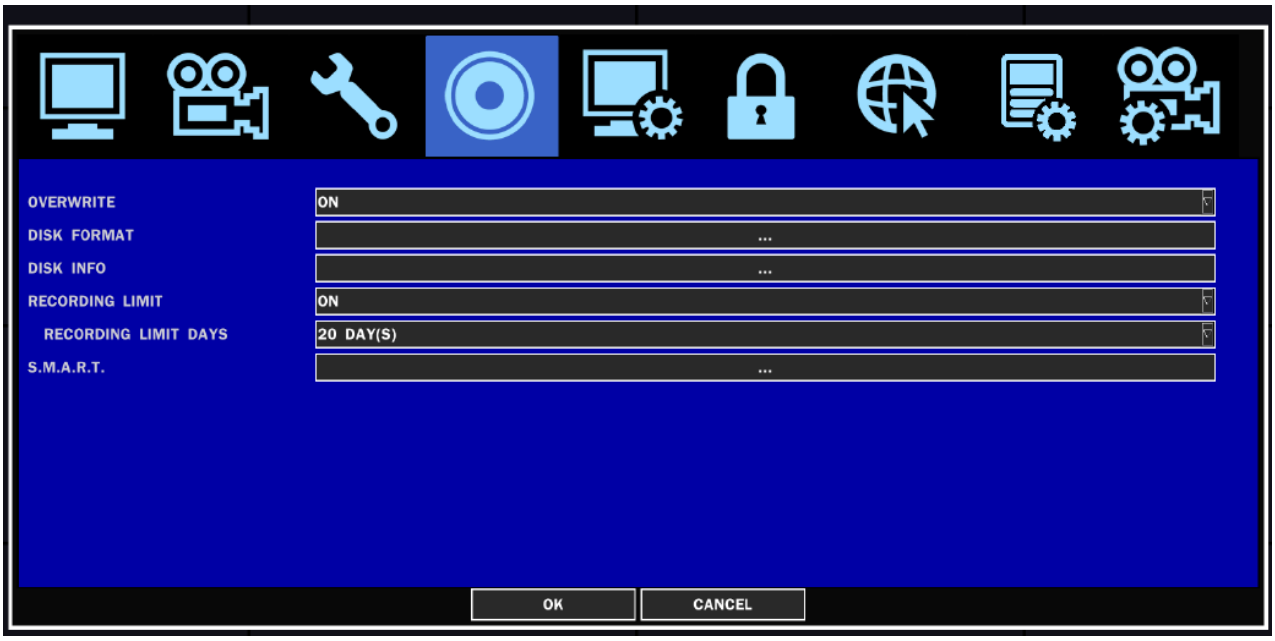

Figure 3.5.1. STORAGE Setup Screen

Table 3.5.1. Menu Items in STORAGE Setup Screen

Item	Description
OVERWRITE	When enabled, the DVR will continue recording and overwrite the oldest existing recorded data once the hard drive is full. When disabled, recording will stop once the hard drive is full.
DISK FORMAT	You will have an option YES or NO for the hard drive format. **Caution:** **We recommend that you archive any data that you may need in the future before you format the hard drive.**
DISK INFO	Hard drive information. • HDD SIZE • HDD START/LAST TIME • MODEL NAME • TEMPERATURE • POWER ON TIME • HEAL (GOOD/NORMAL/BAD) To check the sector information, press DETAIL button.
RECORDING LIMIT	Enable/disable recording limit function.
RECORDING LIMIT DAYS	Set the recording limit days. (1- 90 days) When setting to 1 day, the data will be removed by the hour.

S.M.A.R.T	Set the alarm and beep by setting HDD temperature limit. 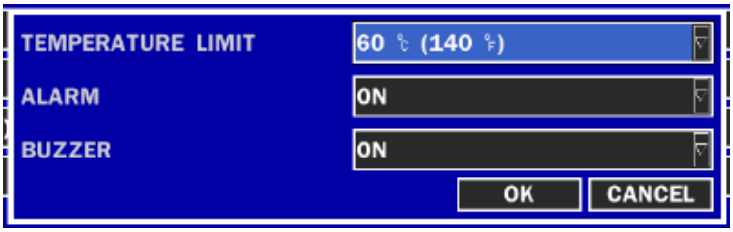

3-6. Setup – System Mode

In the SETUP menu, select the SYSTEM tab . Then, the SYSTEM menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

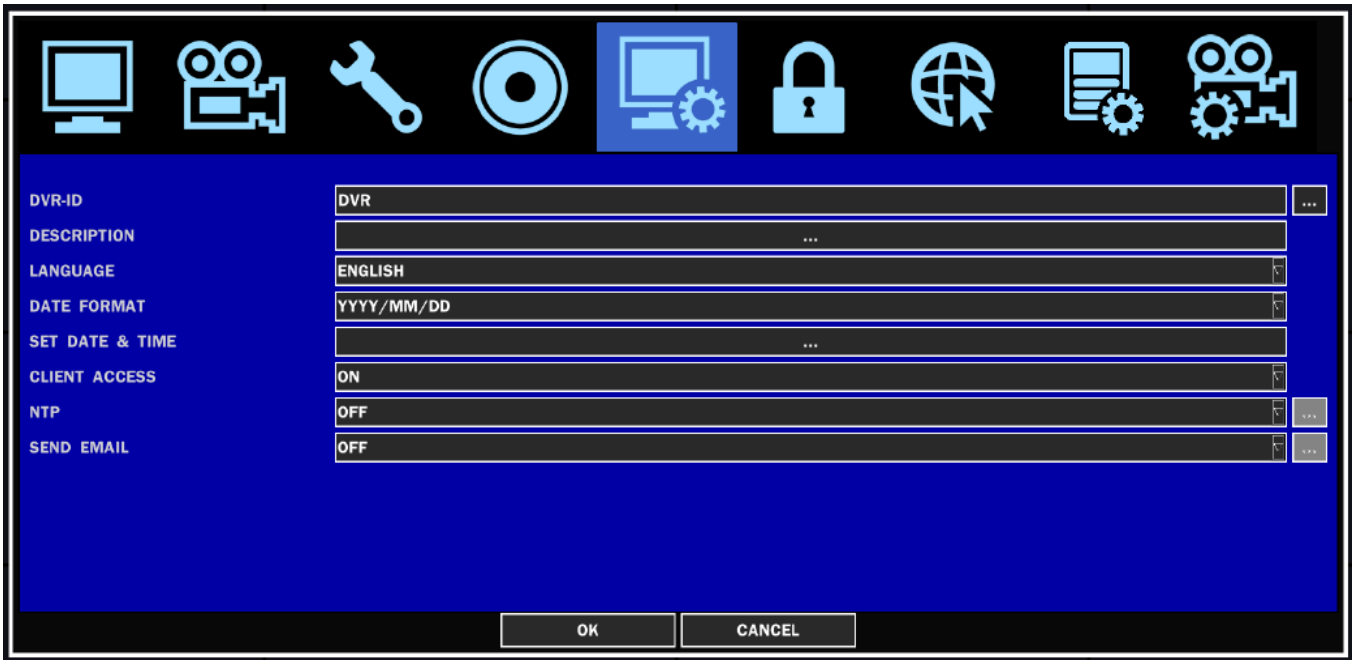

Figure 3.6.1. SYSTEM Setup Screen

Table 3.6.1. Menu Items in SYSTEM Setup Screen

Item	Description
DVR ID	Set DVR ID using the mouse or the control button on the remote control. Press OK to apply the DVR ID.
DESCRIPTION	Press the button to view the system information. **Model name, Software version, Storage size, IP address, MAC address, and DDNS status.**

LANGUAGE	Select the display language using the mouse or the control button on the remote control. Once a language is selected, the display language changes.
DATE FORMAT	Select the date display format using the mouse or the control button on the remote control. Options are: (YYYY/MM/DD, MM/DD/YYYY, DD/MM/YYYY, YYYY-MM-DD, MM-DD-YYYY, DD-MM-YYYY)
SET DATE&TIME	Select the display date and time using the mouse or the control button on the remote control and press OK button to set the present date and time. 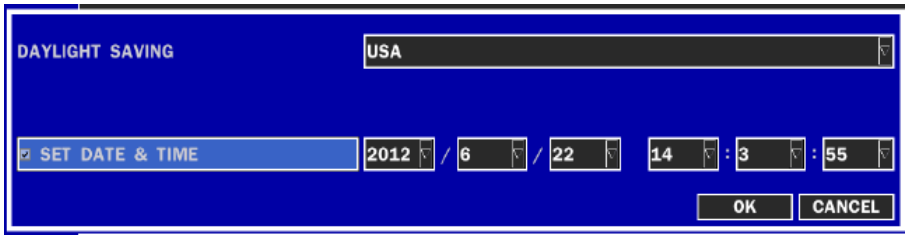
DAY LIGHT SAVING	Select DAYLIGHT SAVING using the mouse and the control button on the remote control and select the appropriate daylight saving time zone. If choosing EU or OTHERS, set the applicable conditions. The options are: **OFF**: Daylight saving is turned off. **USA**: Applies the USA daylight saving time. **EU**: Applies the EU daylight saving time. - Select the GMT AREA using the control button. - Set the time difference with the standard time using the control button. **OTHERS**: If the time zone is neither USA nor EU, set the start and end date of the daylight saving period. - Select BEGIN or END using the control button and press the SEL button. - Select the item using the control button, select the setting value using the control button and press the ESC button to return to SET DATE & TIME setup menu. **CAUTION:** - Do not set the start time to 23:00 for DLS. - DLS can't be applied if the date of BEGIN and END is the same.
CLIENT ACCESS	Enable/Disable remote access through network client software.
NTP	NTP is an abbreviation for Network Time Protocol, which is for synchronizing the time of the computer systems over variable-latency data networks. 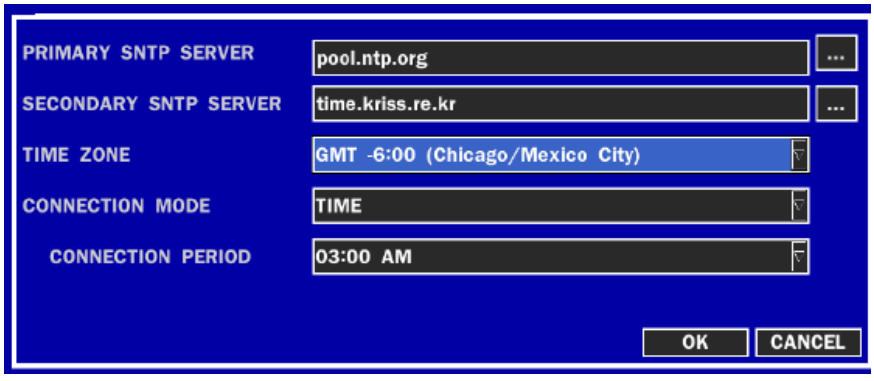

PRIMARY SNTP SERVER: Input the address of the primary NTP time server.

SECONDARY SNTP SERVER: Input the address of the secondary NTP time server.

TIME ZONE: Greenwich Mean Time (GMT) is a term originally referring to mean solar time at the Royal Observatory, Greenwich, London. Because NTP synchronizes with Greenwich Mean Time (GMT) regardless of geography, users must set their own time difference. **Please refer to Page 19~20.**

CONNECTON MODE: Select NTP time server connection mode.

INTERVAL: Synchronize the clock by hours which is set on the connection period menu.

TIME: Synchronize the clock at the time daily which is set on the connection period menu.

CONNECTION PERIOD: 1~24

SEND EMAIL

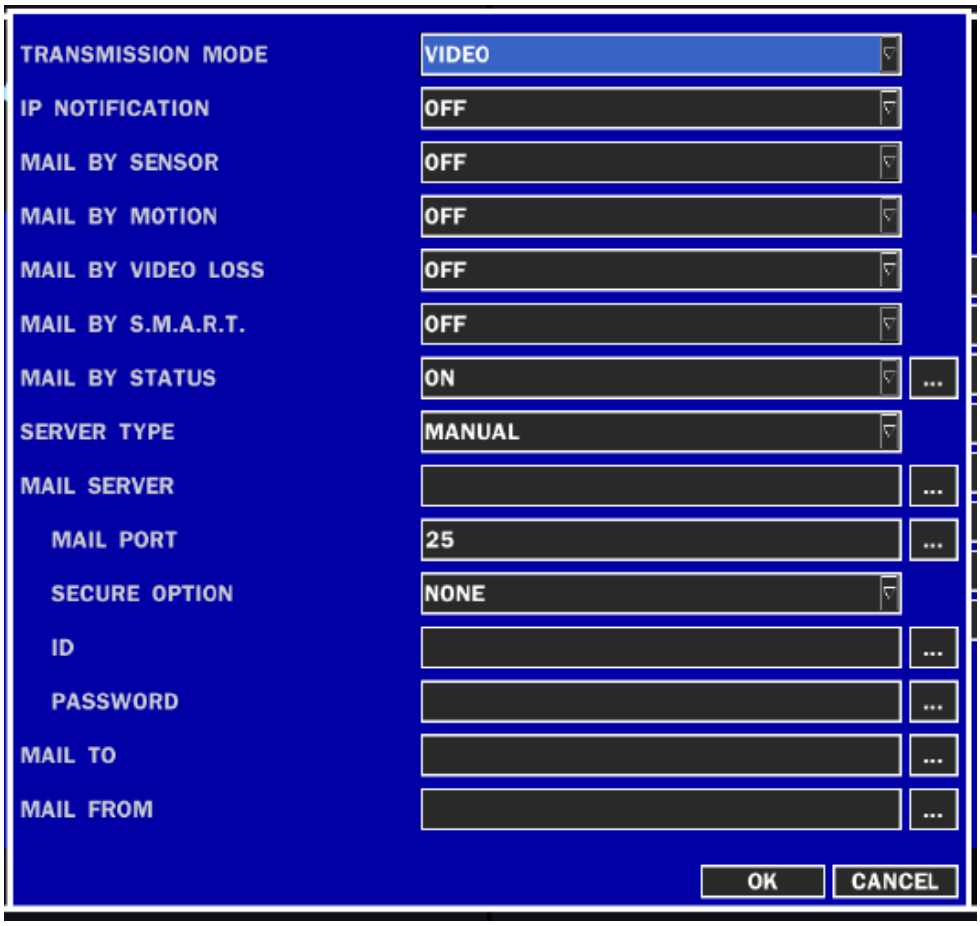

TRANSMISSION MODE: Select e-mail attachment format as an image or a video clip of the channel that triggered the alarm when an alarm event is triggered.

IP NOTIFICATION: Enable/disable sending e-mail when the IP address of your DVR is changed.

MAIL BY SENSOR: Enable/disable sending e-mail reports on the channel that triggered the alarm when a sensor is triggered.

MAIL BY MOTION: Enable/disable sending e-mail reports on the channel that triggered the alarm when a motion is detected.

MAIL BY VIDEO LOSS: Enable/disable sending e-mail reports on the channel that triggered the alarm when a video loss is detected.

MAIL BY S.M.A.R.T: Allows the user to set S.M.A.R.T NOTIFICATION ON or OFF.

MAIL BY STATUS: Set up how many time the mail send. Daily, Weekly, Monthly

SERVER TYPE: MANUAL, GMAIL, HOTMAIL, AOL, YAHOO

MAIL SERVER: Enter the appropriate mail server information to enable sending daily e-mail reports using a virtual keyboard.

MAIL PORT: Allows the user to set E-MAIL PORT

SECURE OPTION: – NONE, SSL, TLS (Allows the user to select E-MAIL SECURE OPTION)

ID: To set the connection user ID for the mail server using a virtual keyboard. (ex.abcd@abcdefg.com)

PASSWORD: To set the connection password for the mail server using a virtual keyboard.

MAIL TO: Enter the appropriate email address to enable sending e-mail reports using a virtual keyboard.

MAIL FROM: To set the mail address sent to the destination host using a virtual keyboard.

3-7. Setup – Security Mode

In the SETUP menu, select the SECURITY tab . Then, the SECURITY menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

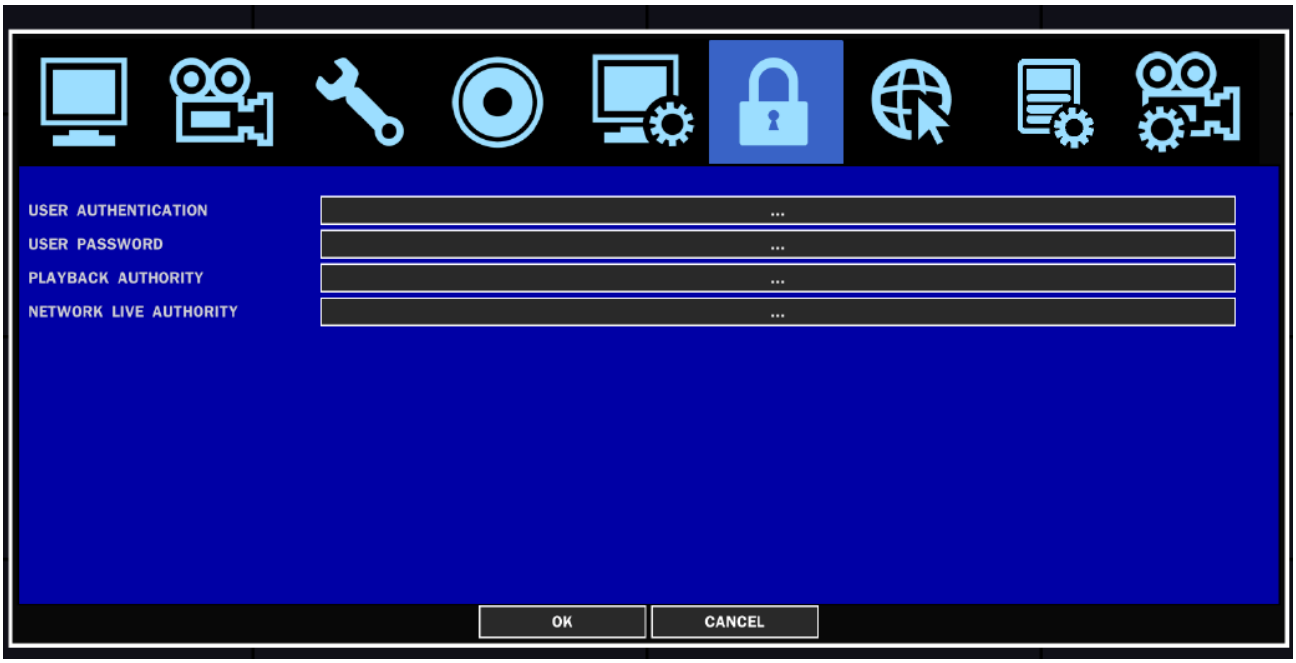

Figure 3.7.1. SECURITY Setup Screen

Table 3.7.1. Menu Items in PASSWRORD Setup Screen

Item	Description
USER AUTHENTICATION	Admin only can access to the menu. **PASSWORD CHECK:** Select either V or nothing for the functions such as

Setup, Playback(PB), PTZ, Record OFF(R/OFF), and Network

Selected Checkbox: The DVR will ask for a password when the given function is selected for all users.

Blank Checkbox: The DVR will not ask for a password when the given function is selected for all users.

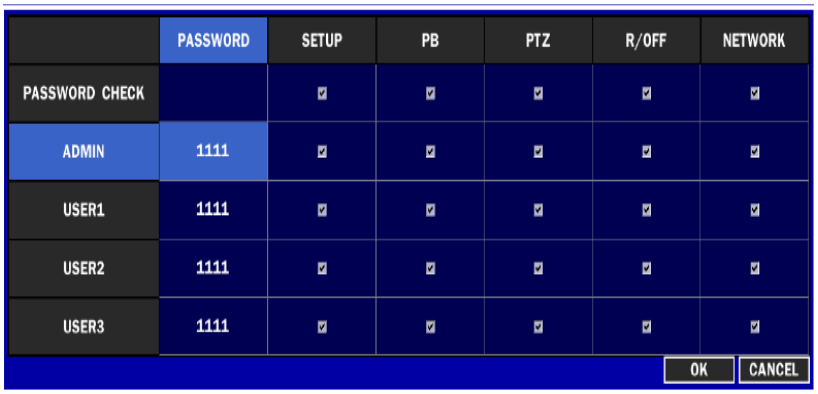

ADMIN, NETOWRK, USER1, USER2, USER3:

Selected Checkbox: The user can access to the function.

Blank Checkbox: The user can not access to the function.

USER PASSWORD

Options are ADMIN, NETWORK, USER1, USER2 and USER3.

Select USER PASSWORD using the mouse or the control button on the remote control and press SEL button. Select user type and enter the current password. And, enter a new password, enter the same password again to confirm and select OK. Then the message "PASSWORD CHANGED" is displayed.

The factory default password is **1111**.

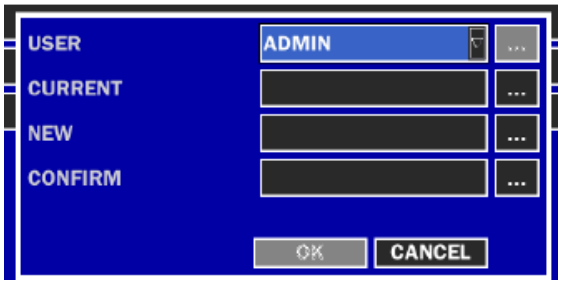

USER1, USER2, USER3 can be changed to another name.

Select one of them and click the square button. Then edit the name.

PLAYBACK AUTHORITY

Allows specific users AUTHORITY OF PLAYBACK per CHANNEL

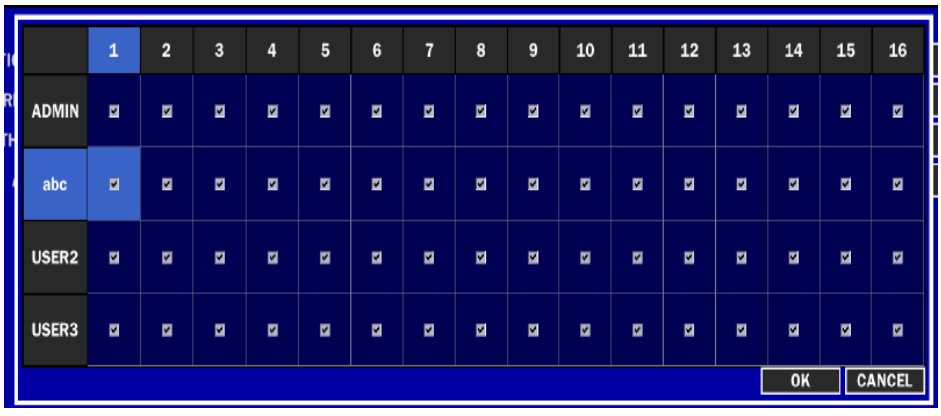

NETWORK LIVE AUTHORITY	Allows specific users AUTHORITY OF NETWORK LIVE VIEW. 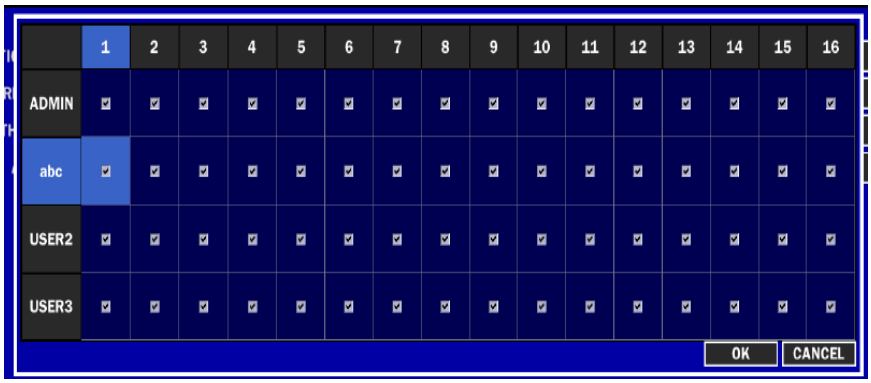

When the user set this function, the login window will appear. Then, the user can select one of user types (ADMIN, USER1, USER2, USER3) using the mouse or the control button on the remote control. The user can select a password using the mouse or the control button on the remote control. The factory default password is 1111. It is highly recommended to assign a new password to protect the system. User can assign a new password in the SECURITY setup menu.

3-8. Setup – Network Mode

In the SETUP menu, select the NETWORK tab . Then, the network menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

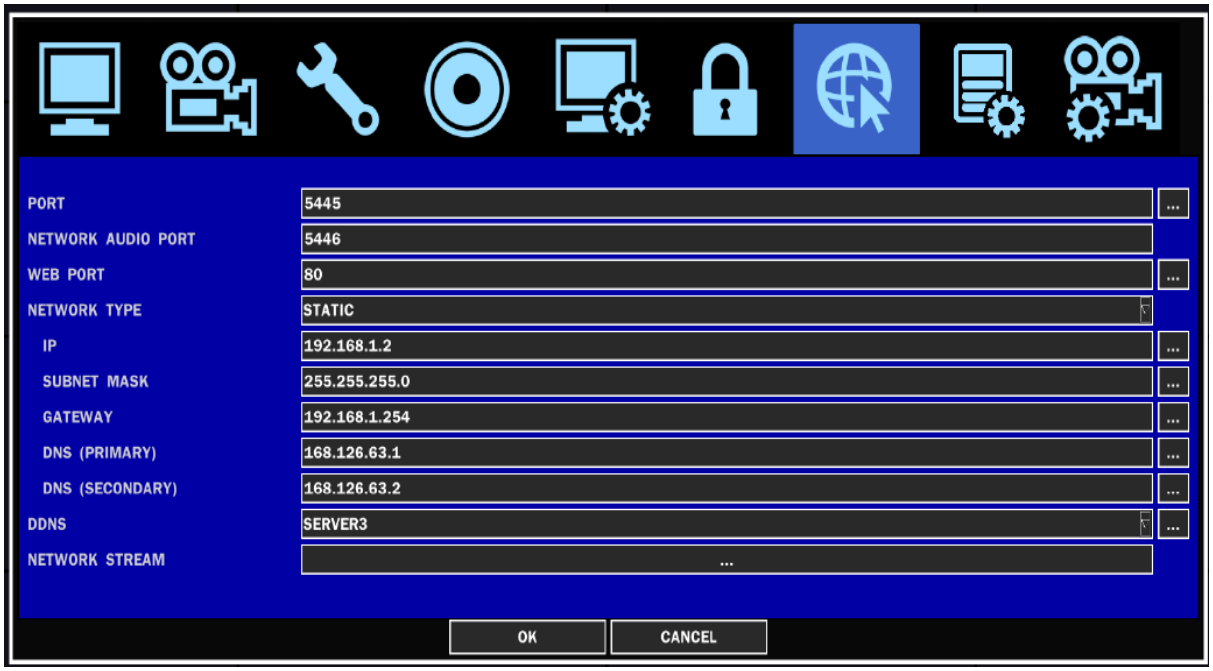

Figure 3.8.1. NETWORK Setup Screen

Table 3.8.1. Menu Items in Network Setup Screen

Item	Description
NETWORK PORT	Set a proper port number for connecting to network. Port number (Default: 5445)
NETWORK AUDIO PORT	Port for audio streaming: NETWORK PORT + 1

WEB PORT	Web Sever Port number (Default: 80)
NETWORK TYPE	Select a type of network connection. Options are: **DHCP:** DVR will automatically retrieve an IP address from the network. **LAN:** Network information must be manually configured.
DHCP	DVR will automatically retrieve an IP address from the network.
LAN	IP: Register IP address that is assigned for the DVR. Gateway: Register Gateway that is assigned for the DVR. Subnet Mask: Register Subnet Mask that is assigned for the DVR.
DDNS	Select DDNS server type. Options are; **SERVER 1: When using the free DDNS that is provided from the manufacturer.** **SERVER 2: Select this type when using the 3rd party general-purpose DDNS Server.** **SERVER 3: Reserved for the future use and not activated.**
NETWORK STREAM	Set the value for network streaming.

3-8-1. DDNS

User can use the function to connect to a network with a domain name. The user can select one type among three DDNS Servers which is supported for free service.

Free DDNS service for Dynamic IP users is provided. Please follow the instruction if your public IP address is a dynamic IP.

1. Select **DDNS** as **SERVER1** and click button. Then the DDNS menu will display.

- **Automatic Host name registration:** Click AUTO button. Then the MAC Address of DVR will be registered automatically as a host name on DDNS.

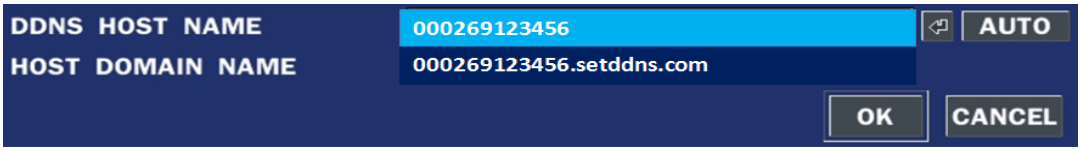

- **Manual Host name registration:** Click button. Then the keyboard window will display.

2. Click OK and save the configuration.

3. Check the status of the DDNS registration on the popup window.

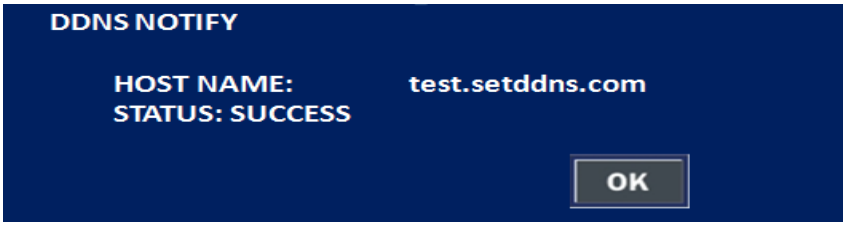

3-8-2. Network Ports

When you connect one or more DVRs to a network through an IP sharing device, each device must have a unique TCP port number for access to each unit from outside the LAN. The IP sharing device must be configured to forward the assigned port to the specific DVR.

Note: This port number is listed next to the Port menu option in the Network Setup screen. If you plan to access the DVR units only from within the same LAN, the TCP port does not have to be changed.

Network Access Beyond a Router

In order to access the DVR remotely beyond a router (firewall), the user must open TCP port for command level, live channels and storage channels. The user needs to open 3 ports on the router; the DVR port 5445, 5446, and the WEB port 80.

If this port is not opened properly, the user can not access DVR beyond a router.

3-8-3. Network Stream

User can set the frame rate and the bit rate for a network stream for a specific channel.

<Note> The network streaming is possible to set up to the recording frame rate of the channel.

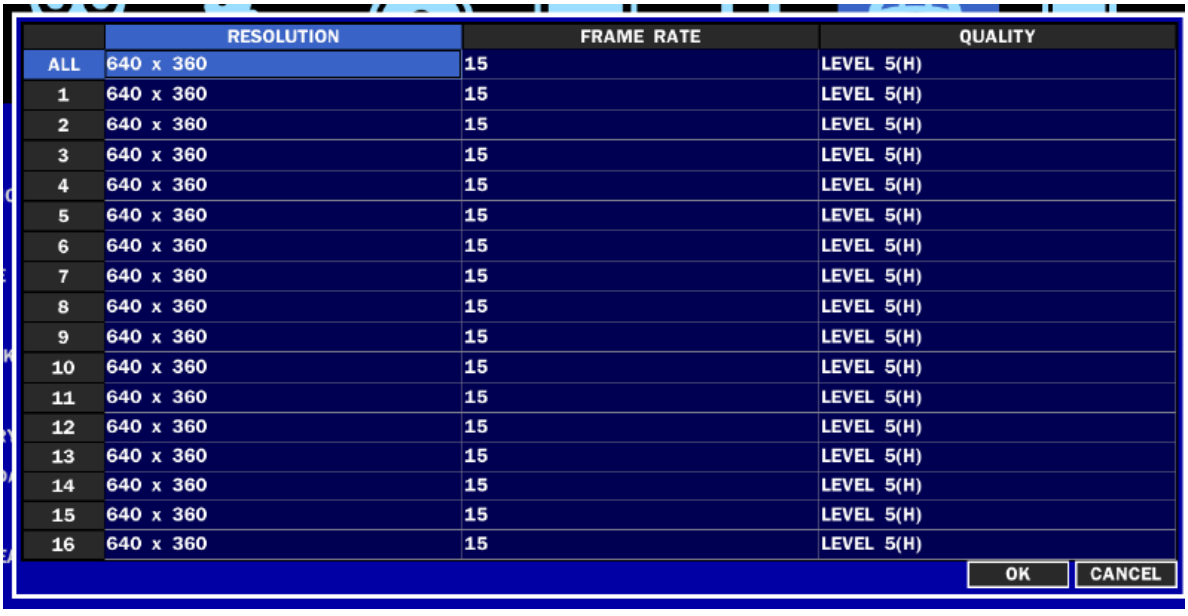

Figure 3.8.4. Network Setup Screen – Network Stream

3-9. Setup - CONFIG Mode

In the SETUP menu, select the CONFIG tab . Then, the configuration menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

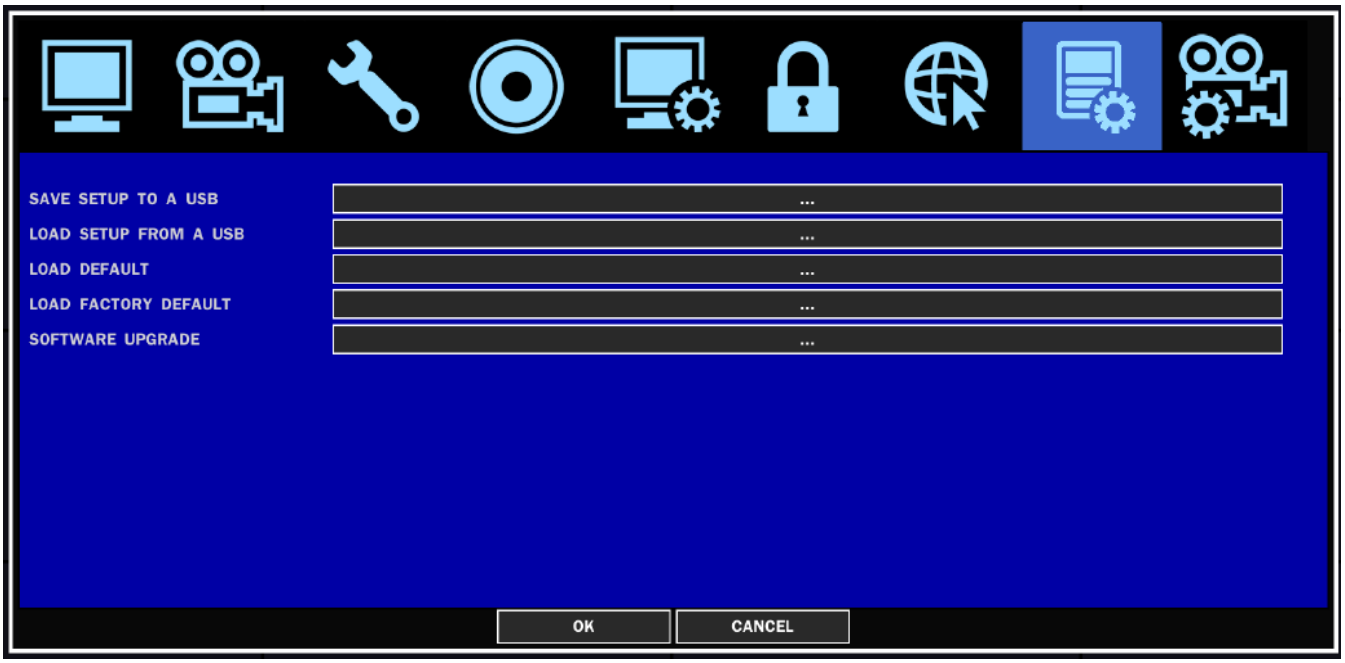

Figure 3.9.1. Configuration Setup Screen

Table 3.9.1. Configuration Setup

Item	Description
SAVE SETUP TO A USB	User can save the current configuration (Setting values) of the DVR to the USB flash drive. Plug in the USB flash on the front panel and press the button to start the saving process. 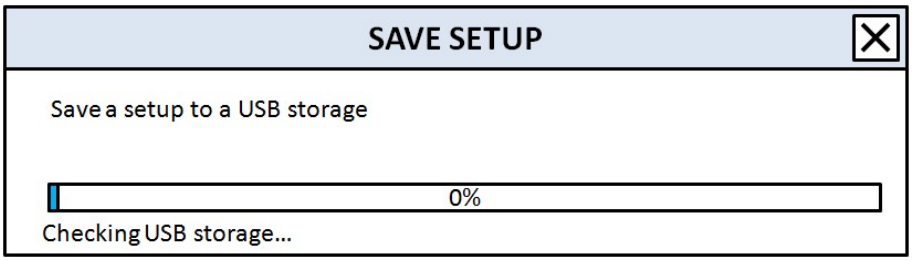
LOAD SETUP FROM A USB	User can upload the configuration of the DVR to another DVR using the USB Flash drive. Plug in the USB flash drive on the front panel and press the button to start the loading process. 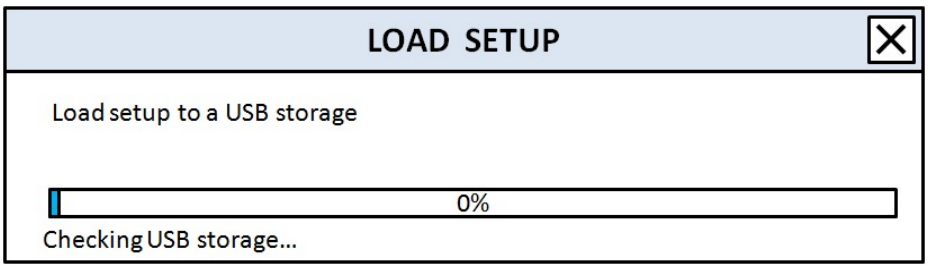

LOAD DEFAULT	Press the button to reset the system to the default settings. 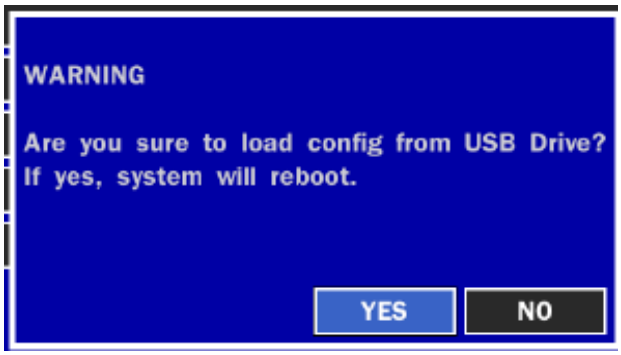 (The following settings such as **Language, DVR ID, Security User Authentication, Security User P/W, Date format, DLS settings, Network settings, HDD overwrite, Limit recording, HDD serial number, and HDD ERROR time** will not be included.)
LOAD FACTORY DEFAULT	Press the button to reset the system to the factory default settings. 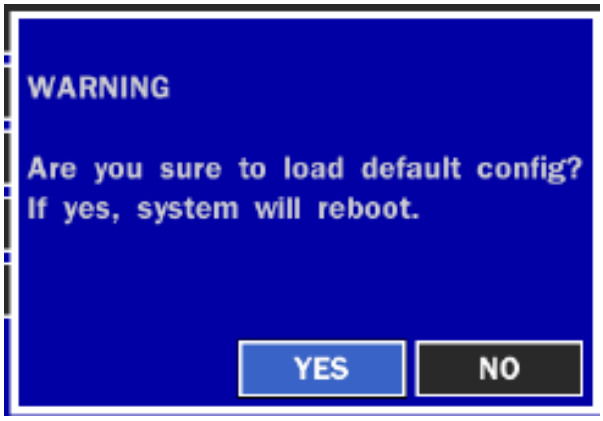
SOFTWARE UPGRADE	Upgrade softeware to the latest version. After connecting USB flash drive to USB port on the DVR, click SEARCH. It will automatically find the upgrade file.

3-10. Quick Setup

In the MENU, select the QUICK SETUP tab . Then, the QUICK SETUP menu is displayed as pictured below. Navigate through the menu items using the mouse or the control button on the remote control and change the value of the menu item.

The QUICK SETUP has high priority than other setting values on RECORDING and NETWORK menu. The QUICK SETUP also cannot set to classified according to channel.

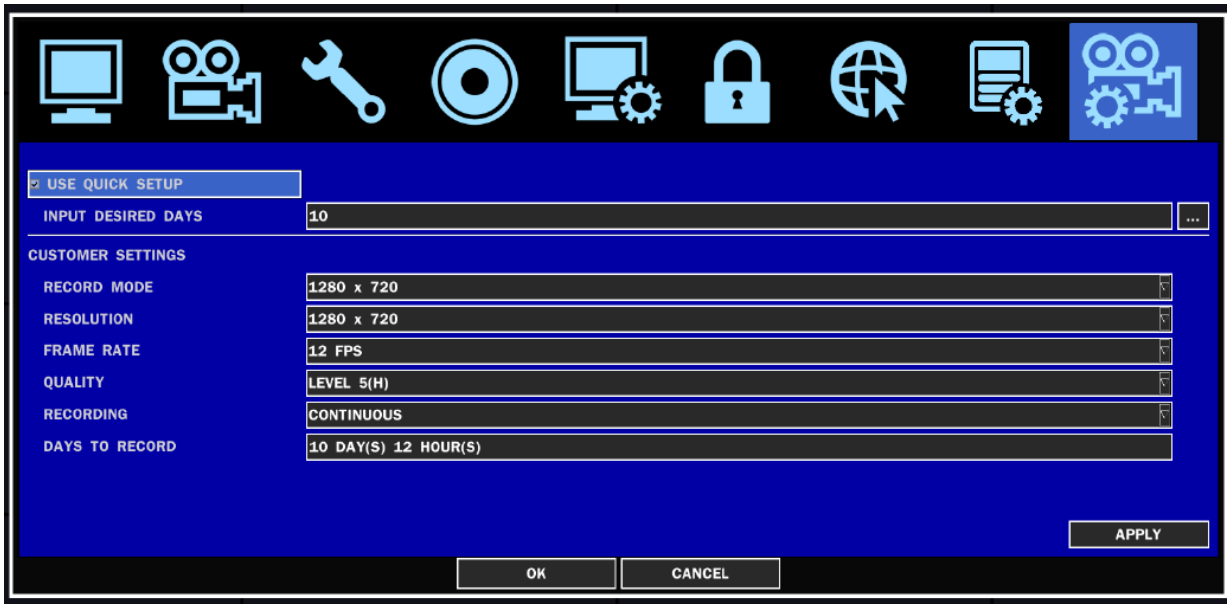

Figure 3.10.1. Quick Setup Screen

Table 3.10.1. Quick Setup

Item	Description
USE QUICK SETUP	Select the Checkbox to use the Quick Setup. When user inputs the DESIRED DAYS to record, the system displays a recommended resolution, frame rate, quality and recording type after calculating the capacity of the installed HDD. At that time, the priority is followed by the order of the items; resolution, frame rate, quality and recording type.
CUSTOMER SETTINGS	User can change the setting value such as resolution, frame rate, quality and recording type. By the setting value, the DAYS TO RECORD will change.

4. Live, Search and Playback

4-1. Live Viewing Screen

In the Live screen, video inputs from the cameras are displayed as they are configured in the Display Setup screen. Various On-Screen Display (OSD) symbols, which indicate the status of the DVR, are described in Table 4.1.1.

Figure 4.1.1. Live Viewing Screen

Table 4.1.1. Status Indicator Icons in Live Viewing Screen

Icon	Description
2009/04/14 17:23:40	Displays the current date and time.
R:ALL	Remote control ID display. If a remote ID is not set, the message "A(all)" is displayed.
15%	Displays the amount of recording on the hard disk from 0-99%.
	Continuous recording in progress.
	Manual recording in progress. To set the Manual recording mode, press the Record button on the front panel.
	Motion alarm recording in progress.

	Sensor recording in progress.
	Indicates that the lock is set.
	Audio mute. To set audio mute, press the Audio button on the front panel. Single audio display. To set audio single for highlighted channel only, press the Audio button on the front panel. To mix audio display, press the Audio button on the left side.
	Indicates that alarm is set. To set the alarm function, press the Alarm button on the front panel.
	Indicates that alarm output is activated.
	Event indicator. When there is an event (motion recording, video loss, HDD fail, S.M.A.R.T), this icon will be highlighted bright.
	Indicates that a network client is connected to the DVR.
	Indicates that sequencing mode is enabled.

4-2. SEARCH Screen

To enter the search screen menu, select SEARCH menu on the screen using the mouse or press SEARCH icon on live screen.

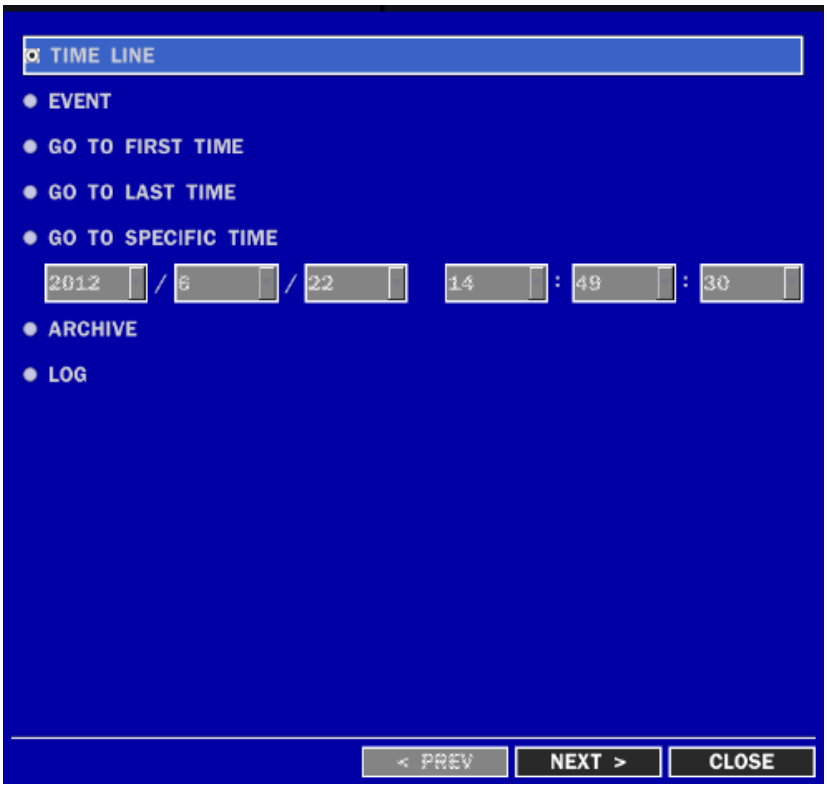

Figure 4.2.1. Search Screen

There are 7 ways of search menu such as TIMELINE, EVENT, GO TO FIRST TIME, GO TO LAST TIME, GO TO SPECIFIC

TIME, ARCHIVE and LOG on the screen.

How to Search Data On the Time-Line Using the Mouse or Front Key Button

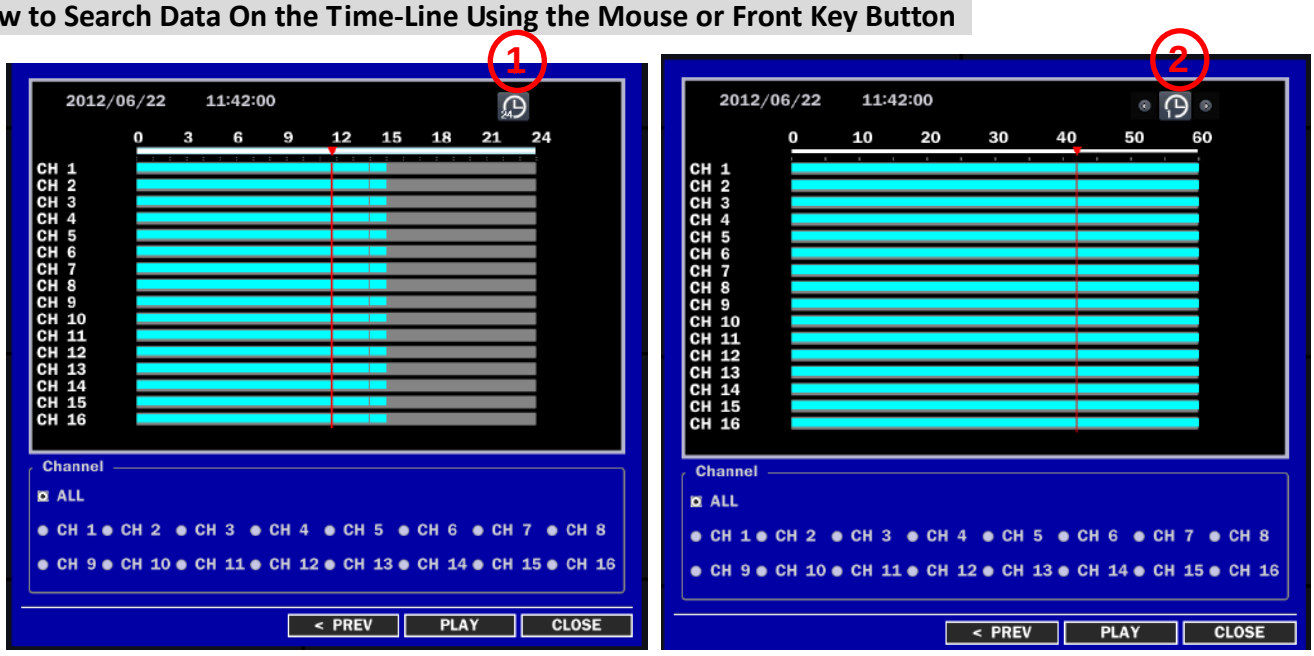

① 1 hour moving: 1-hour time bar (Mouse)/ F/REW and F/ADV button (Front Key)

② 5 minute moving: ◀ **12:00:00** ▶ (Mouse)/ control button ◀ ▶ (Front Key)

There are 7 ways of search menu such as TIMELINE, EVENT, GO TO FIRST TIME, GO TO LAST TIME, GO TO SPECIFIC TIME, ARCHIVE and LOG on the screen.

4-2-1. TIME-LINE Search

The TIME-LINE search window is used to find the stored video by using the time line bar.

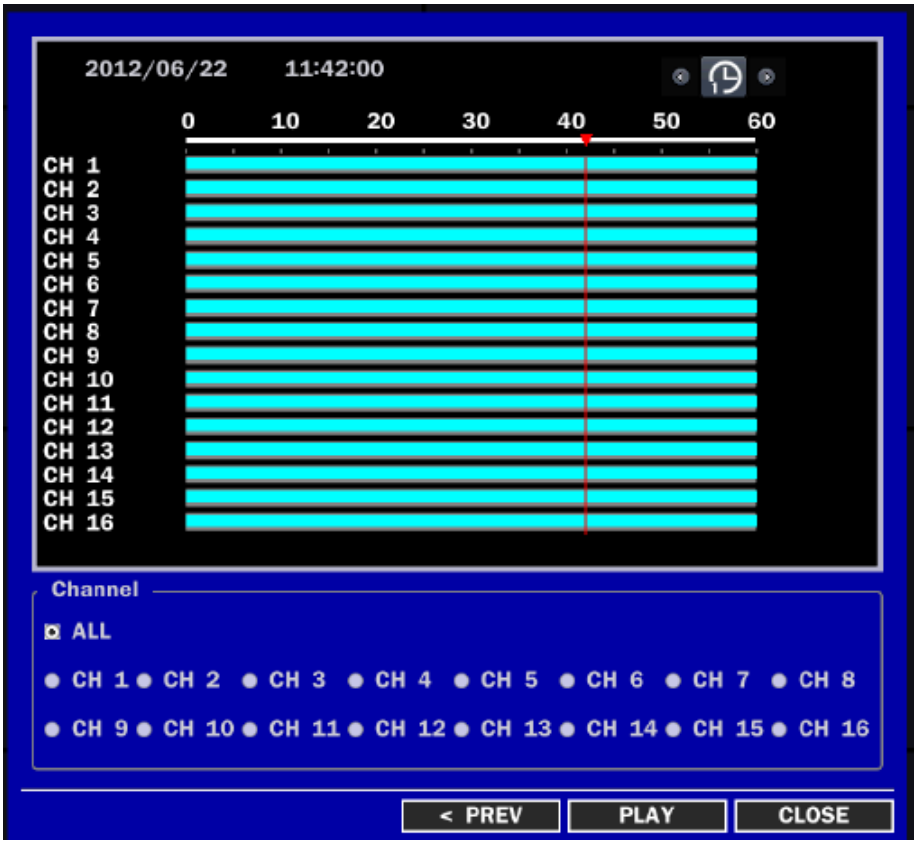

When the Timeline menu is selected, the user can see a calendar which has the recorded data. Select a specific date and time. Use a drag-and-drop function of the mouse control. User can select a specific minutes using a button in the above red box. Press the PLAY button after selecting the specific time. Press the PREV to return to the SEARCH window.

4-2-2. Event Search

The Event Search window is used to find stored video.

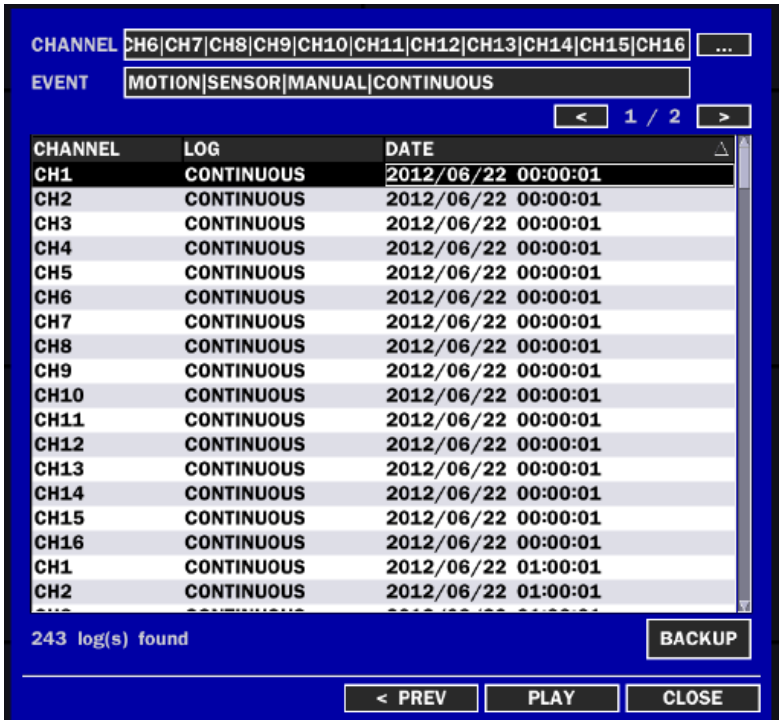

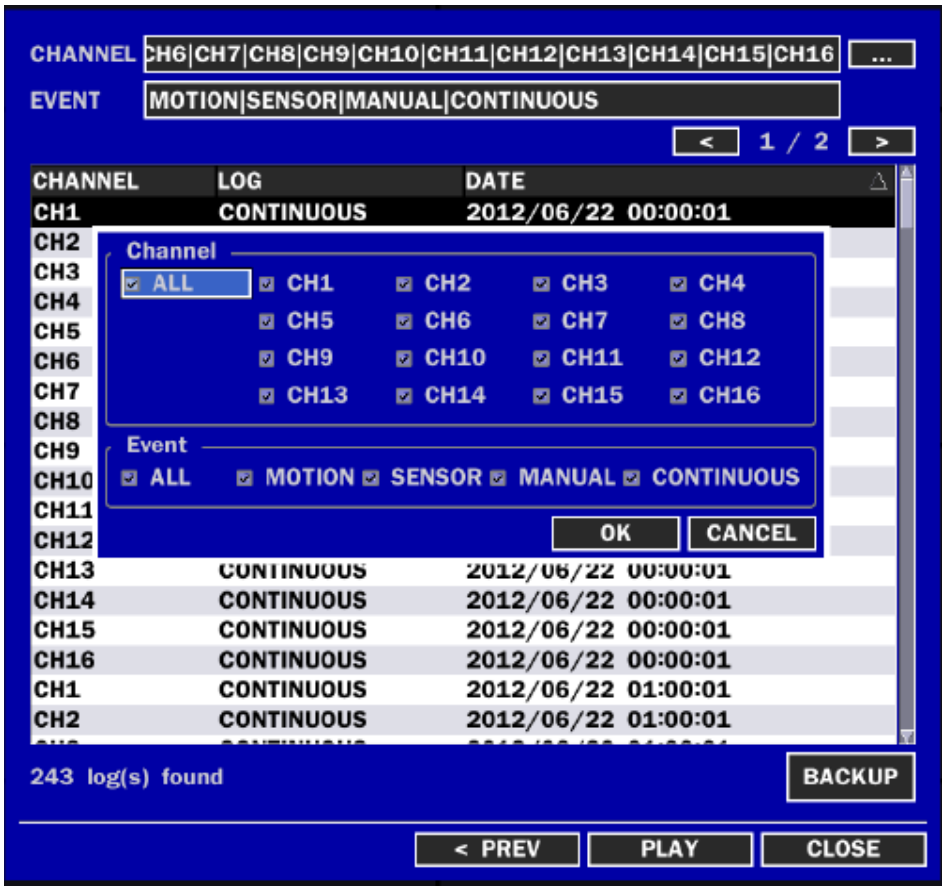

Figure 4.2.2. Event Search Screen

When the Event menu is selected, the user can see a calendar which has recorded data. Select a specific date and the event log will be displayed. Press the PLAY button to playback the data or the SAVE button to save the data after selecting the specific data. User can find a data of the specific channel and event using a button in the above red box. Press the PREV to return to the SEARCH window.

4-2-3. Go To First Time

You can access from the oldest recorded data on the DVR hard drive by selecting GO TO FIRST TIME on the SEARCH window. Press the PREV to return to the SEARCH window.

4-2-4. Go To Last Time

You can access from the last minute recorded data on the DVR hard drive by selecting GO TO LAST TME on the SEARCH window. Press the PREV to return to the SEARCH window.

4-2-5. Go To Specific Time

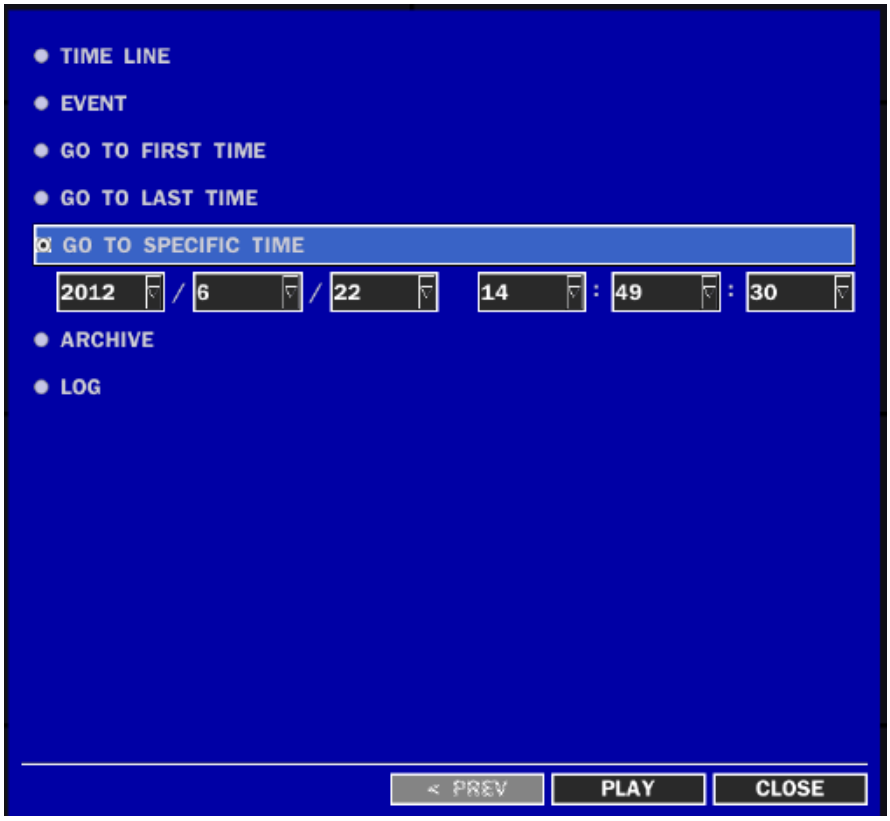

Figure 4.2.3. Go To Specific Time

User can search for video data from a specific instance by setting the date and time in the Go To Specific Time menu. Use the mouse or the control button on the remote control to change the date and time value and press the PLAY button after setting. If there are not video data in the set date and time, No Data Exist message displays.

4-2-6. Archive Search

The ARCHIVE Search window is used to find previously stored video or images.

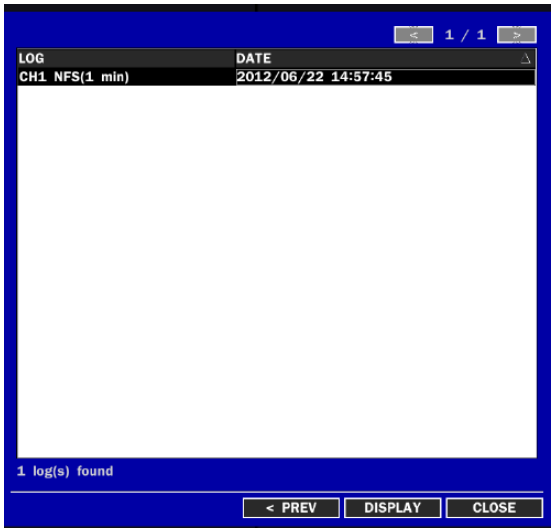

Figure 4.2.4. Archive Search Screen

When the Archive menu is selected, the user can see a calendar which has recording data. Select a specific date and then the archived data will be displayed. Press the Display button to view the still image or the first frame of the selected video, then the user can save the selected data.

4-2-7. Log Search

You can access the LOG list search screen by selecting LOG on the SEARCH window.

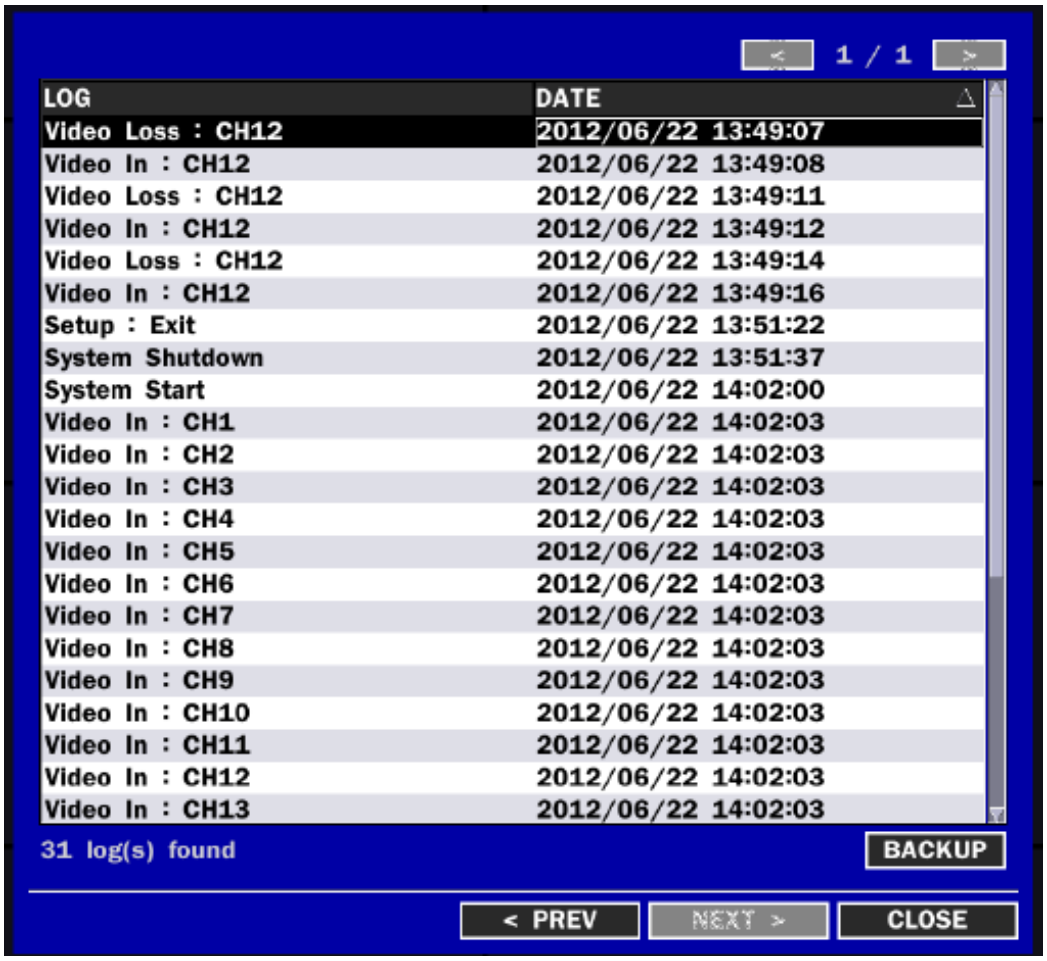

Figure 4.2.5. Log Search Screen

When the Log menu is selected, the user can see a calendar which has recording data. Select a specific date and press NEXT button, and then the log data will be displayed. Press the SAVE button to save the data and then the data is saved as a text file format.

4-3. Play Mode

During playback of a recorded event, the mode changes from SEARCH to PLAY. While in PLAY mode, you may return to the SEARCH screen by pressing the X button on the status bar or the ESC button of a remote control.

Figure 4.3.1. PLAY Mode Screen

The following status bar hides automatically and appears again when putting a mouse pointer to the bar.

Table 4.3.1. Button Functions in PLAY Mode

Button	Description
	Return to the previous menu screen, search window, or exit from the Menu.
◀◀	Press to rewind the footage at 1x, 2x and 4x speeds. Reverse playback speed is shown as -1x(normal), -2x (2 times normal) and -4x (4 times normal) at the bottom right of the screen.
--◀	Jump/Step backward. The playback position moves 60 seconds backward.
▶/ II	Press to play or pause recorded video.
▶--	Jump/Step forward. Playback position moves 60 seconds forward.
▶▶	Press to fast forward the footage at 1x, 2x and 4x speeds. Playback speed is indicated as +1x, +2x and +4x for normal, twice and 4 times of the regular speed at the bottom right of the screen.
	Press to backup the video.

5. PTZ Control

To control the PTZ functions of the camera, select PTZ menu on the screen using the mouse. Select the item you wish to control the PTZ camera and control them using the mouse or the control button on the remote control. Please refer to the table 5.1. for the control.

Figure 5.1. PTZ Control Screen

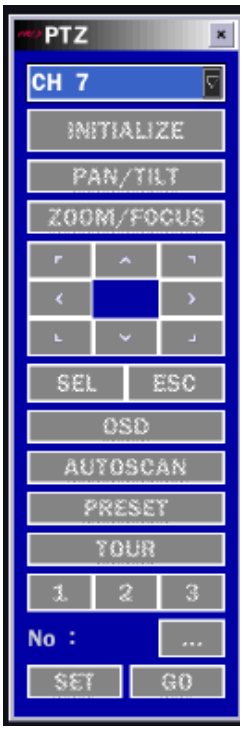

Table 5.1. Button Functions in PTZ Control

Item	Description
INITIALIZE	Initialize the PTZ settings of the selected camera.
PAN / TILT	Select PAN/TILT using the mouse or the control button and press SEL button on the remote control. Adjust the tilt (UP/DOWN) / pan (LEFT/RIGHT) position using the mouse or the control button on the remote control.
ZOOM / FOCUS	Select ZOOM/FOCUS using the mouse or the control button and press SEL button on the remote control. Adjust the zoom (Mouse Wheel Down or Up/Down button of the remote control)/focus (Mouse Wheel Up or Left/Right button of the remote control) position.
OSD	Select the OSD to enter the menu. Control keys are Right, Left, UP, Down, Select, Far (REW KEY), and Near (FF KEY). Press the ..... button to return to the main menu. Press the PTZ button to escape from the OSD menu.
AUTOSCAN	Press the right key (▶) on the control button to start auto scan Press the left key (◀) on the control button to stop auto scan.
PRESET	Select the PRESET and press the left key (◀) on the control button. Then, number input window will appear. Set the number (3 digits) using the number key and press the SEL to set the preset number for the current position. Press the right key (▶) on the control button and set the number (3 digits) to go to the preset number.
TOUR	Select the TOUR and press the right key (▶) on the control button. Then, number input window will appear. Set the number (1 digit) using the number key and press SEL to make the group number work. Press the left key (◀) on the control button to stop tour. User can set the preset number in the tour group of the OSD menu.
NUMBER	Available only on the TOUR and PRESET menu.
	Press the ESC button to return to the main menu.

- **Preset/ Tour/ OSD/ Auto-scan function are available on the specific model AP8777 and PMA-200.** (Select it in the NAME of PTZ setup menu)

6. Back Up

6-1. Still Image Backup onto USB Flash Drive

Still images can be captured and archived onto a USB flash drive or a hard drive in live mode or while playing back recorded video. In the live mode, press the BACKUP button to launch the archive function or select BACK UP menu on the screen using the mouse.

1. Select a specific channel which wants to backup on live screen.
2. When you press BACKUP button , the archiving screen will display as Figure 6.1.1.
3. Once you press NEXT button and select media type, the system will start to archive the data to the selected media.

Figure 6.1.1. Still Image Archiving and Backup Screen

NOTICE For a backup using a USB Flash Drive, the file format of the USB flash drive has to be FAT32.

6-2. Video Backup onto USB Flash Drive

Video can be captured and archived onto the USB flash drive or a hard drive while playing back the recorded video. In playback mode, press the BACKUP button to launch the archiving function.

1. When you press BACKUP button , the DVR will ask whether to archive a Still Image or Video Clip.
2. If the user selects VIDEO CLIP, the DVR will ask for the channel, file format and the setting of the archiving duration. If a Huge Backup is selected, the duration is from 1 hour to 24 hours. If the user sets the channel, file format and duration, the DVR will ask which media you will take for archiving.

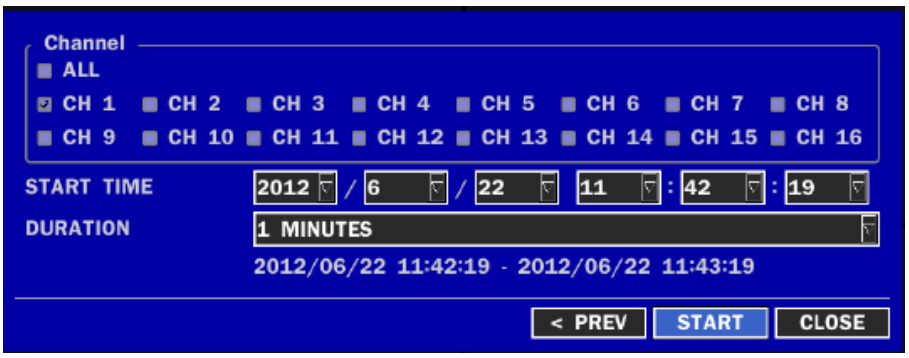
Channel
ALL
CH 1 CH 2 CH 3 CH 4 CH 5 CH 6 CH 7 CH 8
CH 9 CH 10 CH 11 CH 12 CH 13 CH 14 CH 15 CH 16
START TIME
2012 / 6 / 22 11 : 42 : 19
DURATION
1 MINUTES
2012/06/22 11:42:19 - 2012/06/22 11:43:19
< PREV
START
CLOSE

Figure 6.2.1. Video Archiving and Backup Screen

3. Once you select the media, the system will start to archive the data to the selected media.

Figure 6.2.2. Video Archiving and Backup Screen

The DVR will convert the corresponding portion of the video into an AVI file.

6-3. Transferring Still Images or Video from the ARCHIVE List

The stored data in the hard drive can be found in the ARCHIVE list in the SEARCH window.

User can back up still images or video into the storage device from the ARCHIVE list.

1. Select the date to begin searching and navigate through the days using the mouse or the control button on the remote control.
2. Once you have selected the date, press the NEXT button to open the list of stored data.
3. Use the mouse or the control button on the remote control to scroll through the archive list.
4. Select a list of stored events that happened previous or after the current selection.
5. Once the desired event has been selected, press the DISPLAY button to view the still image or the first frame of the selected video.
6. Press the BACKUP button to launch the archiving function in playback mode.
7. Press the CLOSE button to return to the SEARCH window.

6-4. Playback of Backup Video

- AVI format: AVI format video can be played back using Window Media Player™ or other media player that is compatible with AVI format video.
- NSF format: H.264 format video can be played back using the player (the HD player) that the DVR copies on USB flash drive with video. This format is only available when the user selects a huge backup.

  Three files are copied on USB flash drive.
  - H.264 file: H.264 format video file.
  - INDEX file: Title file of date and time.
  - HD PLAYER: Exclusive video viewer.

HD Player
HD Player
Ver 0.0.9
00-00-00 / 00:00:00

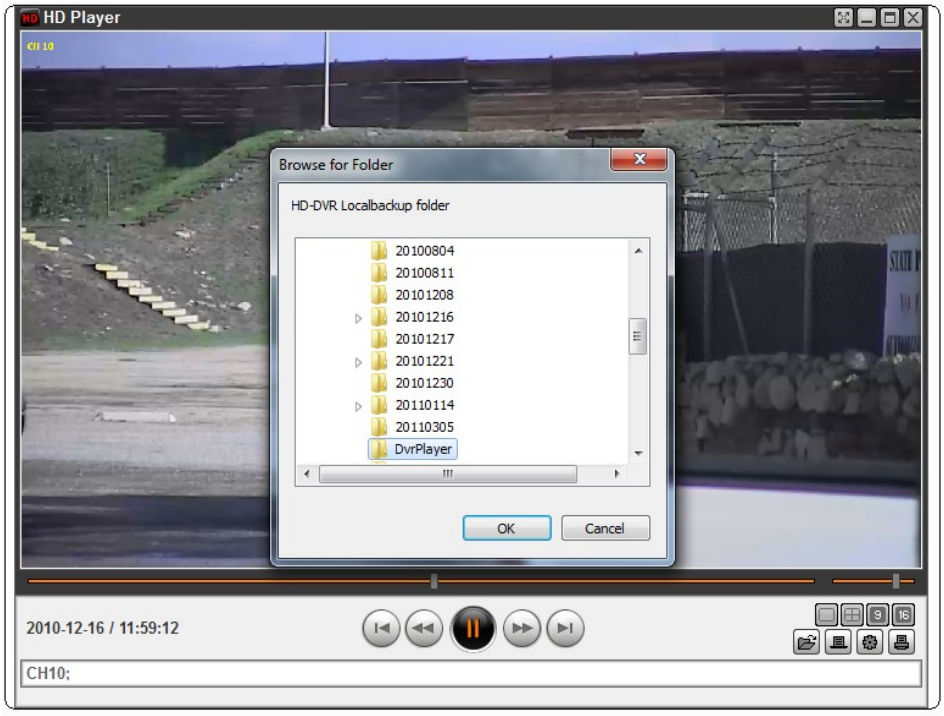
HD Player
Browse for Folder
HD-DVR Localbackup folder
20100804
20100811
20101208
20101216
20101217
20101221
20101230
20110114
20110305
DvrPlayer
OK
Cancel
2010-12-16 / 11:59:12
CH10;

7. Single Site Network Viewer

The DVR provides a live remote monitoring feature. Remote monitoring requires installation of the network viewer on your PC.

NOTICE

In a high bandwidth network, a maximum of four users can access one DVR simultaneously. In a low bandwidth network it is recommended that only one user access the DVR at a time.

7-1. PC Requirements

Minimum PC Requirements

CPU	Intel Pentium Ⅳ
	2Ghz
Memory	512MB
VGA	128MB
Resolution	1024x768
Disk Space	1GB
OS	Windows 2000, XP Professional, XP Home, Vista, 7 (NOTE: Not all versions of Vista and 7 are supported)
Network	10/100Base T
Others	Direct X 8.1 or Higher

Recommended PC requirements

CPU	Intel Core 2 Duo
	1.8Ghz or higher.
Memory	1GB DDR2 or higher.
VGA	512MB or higher.
Resolution	1024x768
Disk Space	1GB
OS	Windows 2000, XP Professional, XP Home, Vista, 7 (NOTE: Not all versions of Vista and 7 are supported)
Network	10/100/1000Base T
Others	Direct X 9.0 or higher.

7-2. Installing the Network Viewer

1. Insert the provided CD in the CD drive and double-click “UMSClient (XXXX)**.exe**”
2. Select a destination folder and click “Next”.

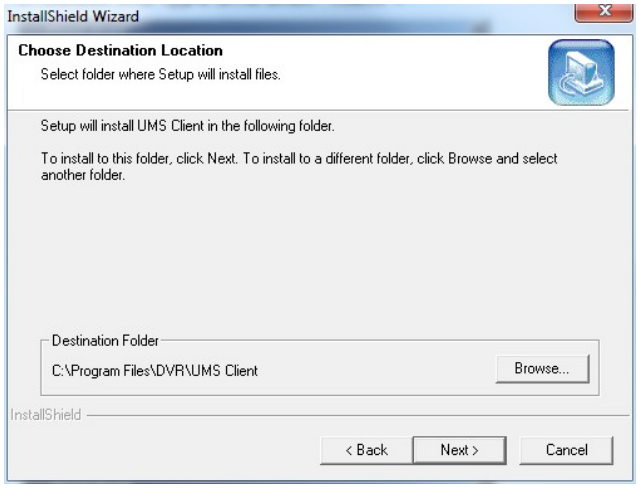
InstallShield Wizard
Choose Destination Location
Select folder where Setup will install files.
Setup will install UMS Client in the following folder.
To install to this folder, click Next. To install to a different folder, click Browse and select another folder.
Destination Folder
C:\Program Files\DVR\UMS Client
Browse...
InstallShield
< Back
Next >
Cancel

3. Select the program folder and click “Next”.

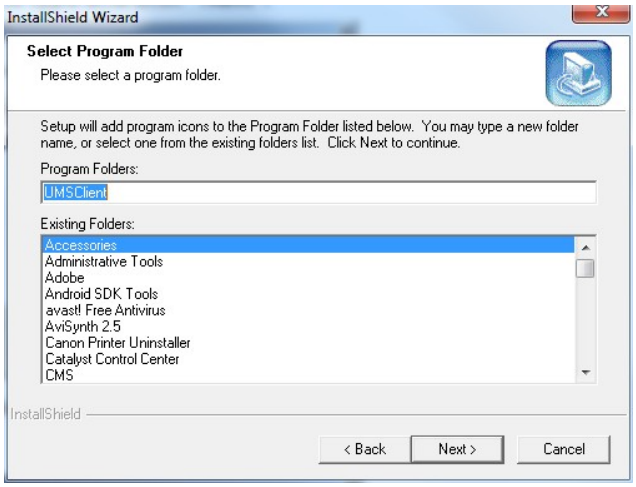

4. The setup status screen is displayed.

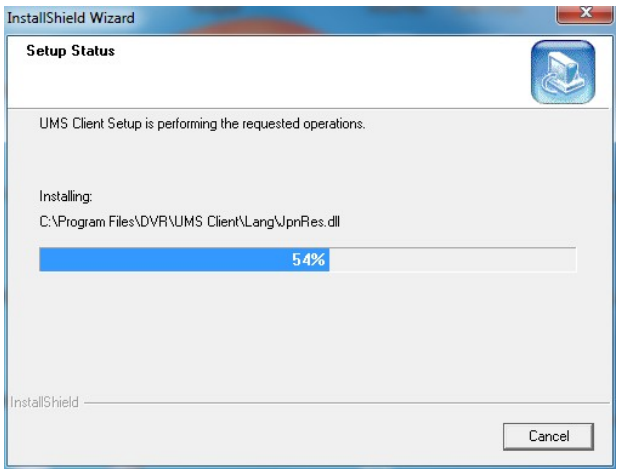

5. After the installation is completed, **“UMS Client”** icon displays on the desktop screen.

7-3. Live Monitoring Mode and Functions.

Button	Function	Description
	**DATE & TIME**	Displays the current date and time.
	CONNECT/DISCONNECT	Connect/disconnect network connection.
	SEARCH	Switches the live mode to search mode.
	**DISPLAY MODE**	Select a channel and screen display mode.
	PAN/TILT/ZOOM/ FOCUS	Control the PAN/TILT/ZOOM/FOCUS features on the remote camera.
	CAPTURE	Capture a still image from the live screen.

	PLAY/PAUSE	Play/pause live video.
	ALARM	The ON/OFF button of the alarm output of the DVR. If the DVR has an alarm output, the button will be indicated red.
	SETUP	Display the setup screen of the network viewer.
	HDD USAGE	DVR HDD storage Indicator.
	NETWORK BANDWIDTH	Shows the transferred frames and network bandwidth.
	AUDIO	Adjust the volume. The audio can be turned on or off by clicking the audio icon.
	LOG WINDOW	Shows the even log, date, and time.

Operations of the display mode of the main screen

- Single channel display - Click the one of channel button or double-click the channel screen.

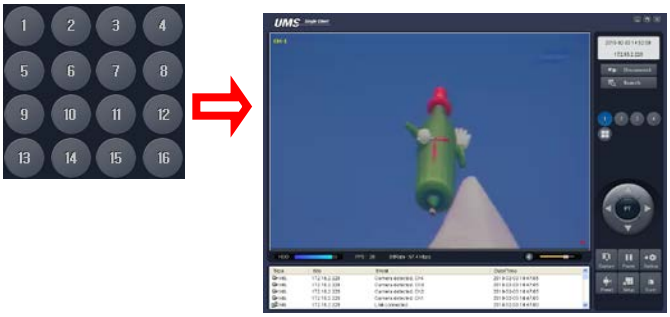

- QUAD/-screen display - Click the QUAD button to switch to quad-screen display

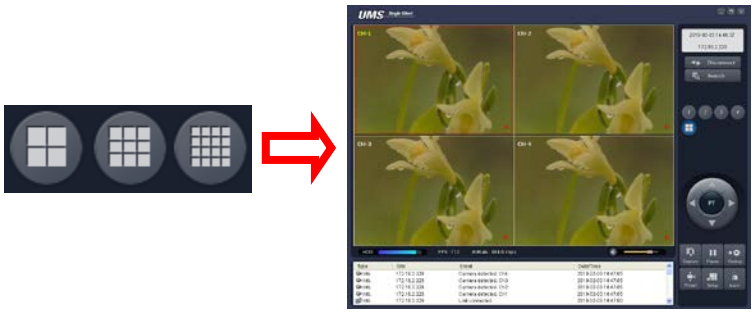

- Full screen display - Click the maximize button to display only screen and hidden the operation panel.

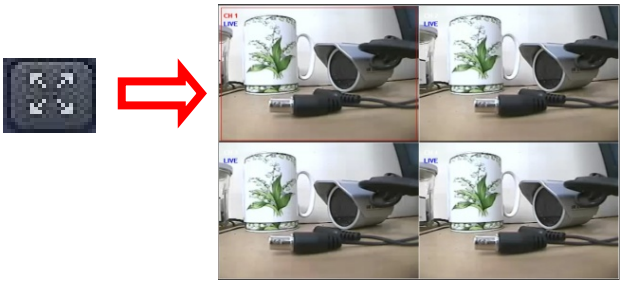

Image capture of live screen

Still-image of live screen can be captured and saved as a BMP or JPEG file.

1. Click the channel to be captured. Then the selected channel will be highlighted red.
2. Click the CAPTURE button. Then the IMAGE CAPTURE dialog is displayed.

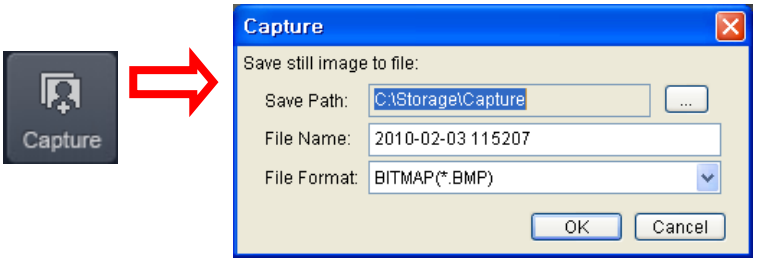

3. Set the SAVE PATH, FILE NAME, and FILE FORMAT and click the OK button to save the captured still image.

7-4. Bi-directional Audio

The UMS Client allows for bi-directional audio between the client and the DVR unit. The DVR must have an audio input connected, and the PC must have an audio output.

7-5. Remote Search Mode and Functions

Button	Function	Description
	**DATE & TIME**	Displays the recording time of the data selected on the time bar at the bottom of the main user interface.
	**DISCONNECT**	Disconnect network connection.
	LIVE	Switches the search mode to live mode.
	**CAPTURE**	Capture a still image from live screen.
	MARK IN	Set the start time for video backup.
	MARK OUT	Set the ending time for video backup.
	BACKUP	Backup the selected recorded video as AVI format.
	SEARCH CALENDAR	The calendar shows dates with recorded video in a light blue and the selected date in dark blue.
	**TIMELINE BAR**	The timeline shows recorded data in dark blue on the bar.
	PLAYBACK BUTTON	The playback buttons.
	**DISPLAY MODE**	Select a channel and screen display mode.

Searching and playing video in the remote DVR

Video recorded in the remote DVR or Video recorded on the PC can be searched and played back.

1. Connect to the remote DVR and press the SEARCH button. The live mode will change to the search mode.

- Searching the video recorded in the remote DVR: Connect to the remote DVR.
- Searching the video recorded in the PC: Do not connect to the remote DVR.

2. Select the date to search the video. (NOTE: Dates highlighted blue are only available for playback)

3. Drag the marker on the timeline bar to select the hour. (NOTE: The marker can only be set on the solid blue bar, which indicates the recorded data)



4. Press the PLAY button to begin playback of the recorded data.

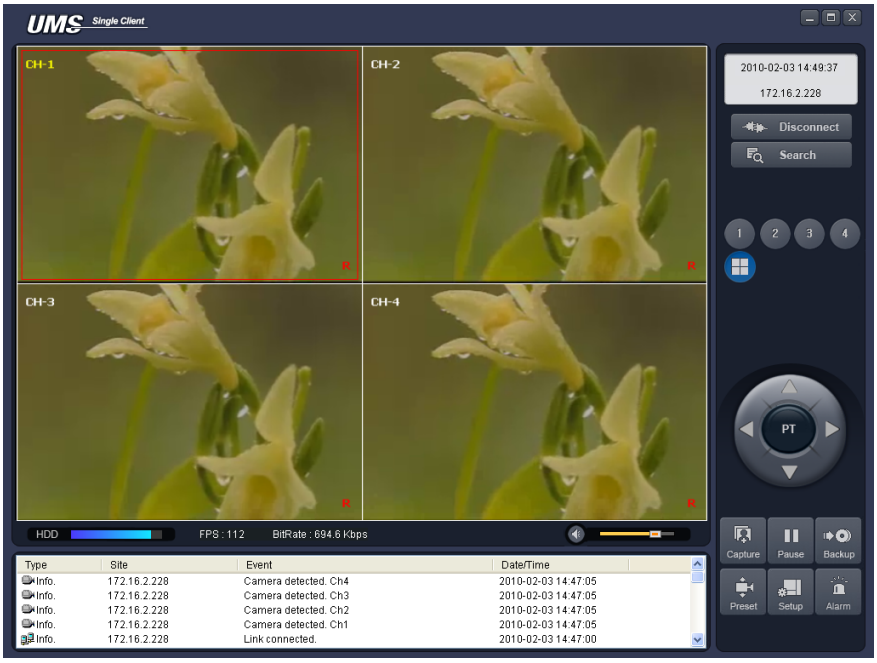

Backing up video from the remote DVR

Video recorded in the remote DVR can be backed up on the PC HDD as an AVI format or NSF format.

1. Connect to the remote DVR and play the video recorded in the remote DVR.
2. Drag the marker on the timeline scale and press the MARK IN button to mark the video backup starting point.



3. Drag the marker on the timeline scale and press the MARK OUT button to mark the video backup ending point. Then the selected marked time to backup will be highlighted in green. Press the BACKUP button to bring up the BACKUP window.

4. In the BACKUP window, select the channels, settings, file path, and the file format. Select the OK button to start the backup process.

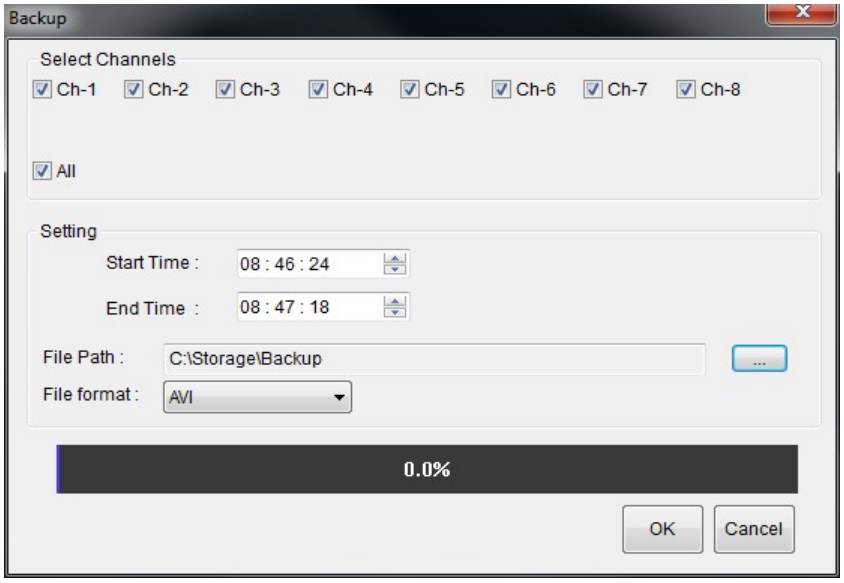

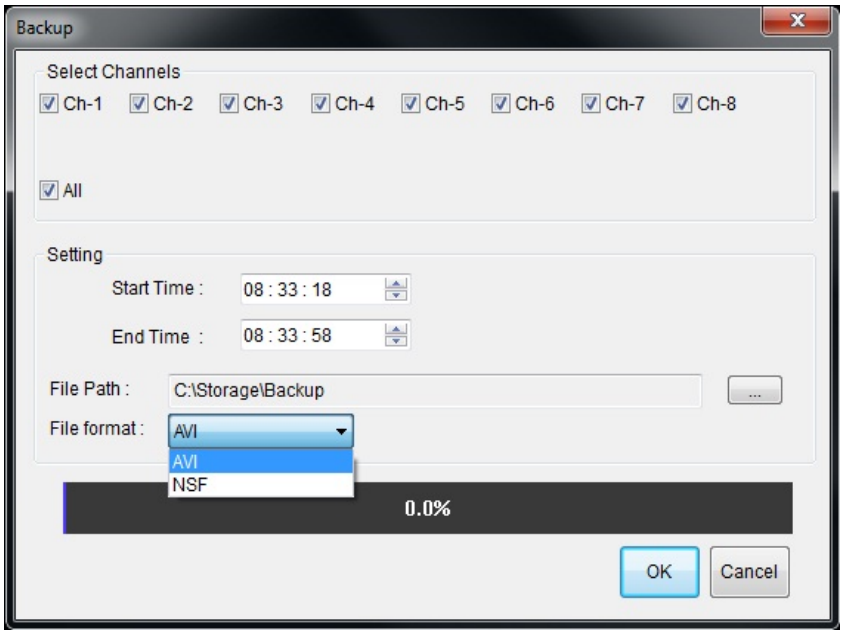

- Select Channels: Select channels to backup.
- Start Time / Stop Time: Backup time can be changed.
- File Path: Shows the folder that the backup file is recorded.
- File Format: Select backup file format. (NOTE: File format selection may not be available depending on the firmware version, software version, and the DVR model)

7-6. PC System Configuration

Click the SETUP button. Then the Setup dialog is displayed as below.

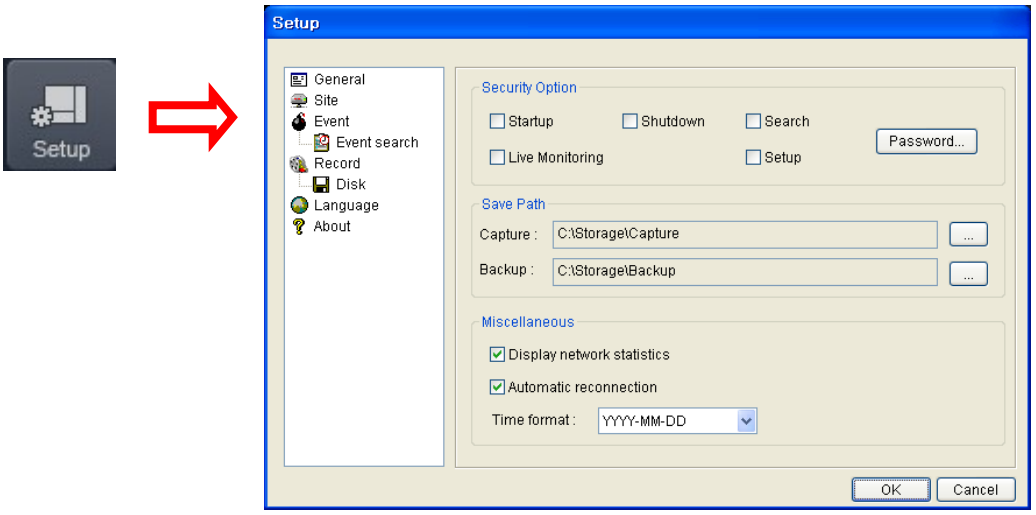

Setting General

Set the Security Option, Save Path, and Miscellaneous.

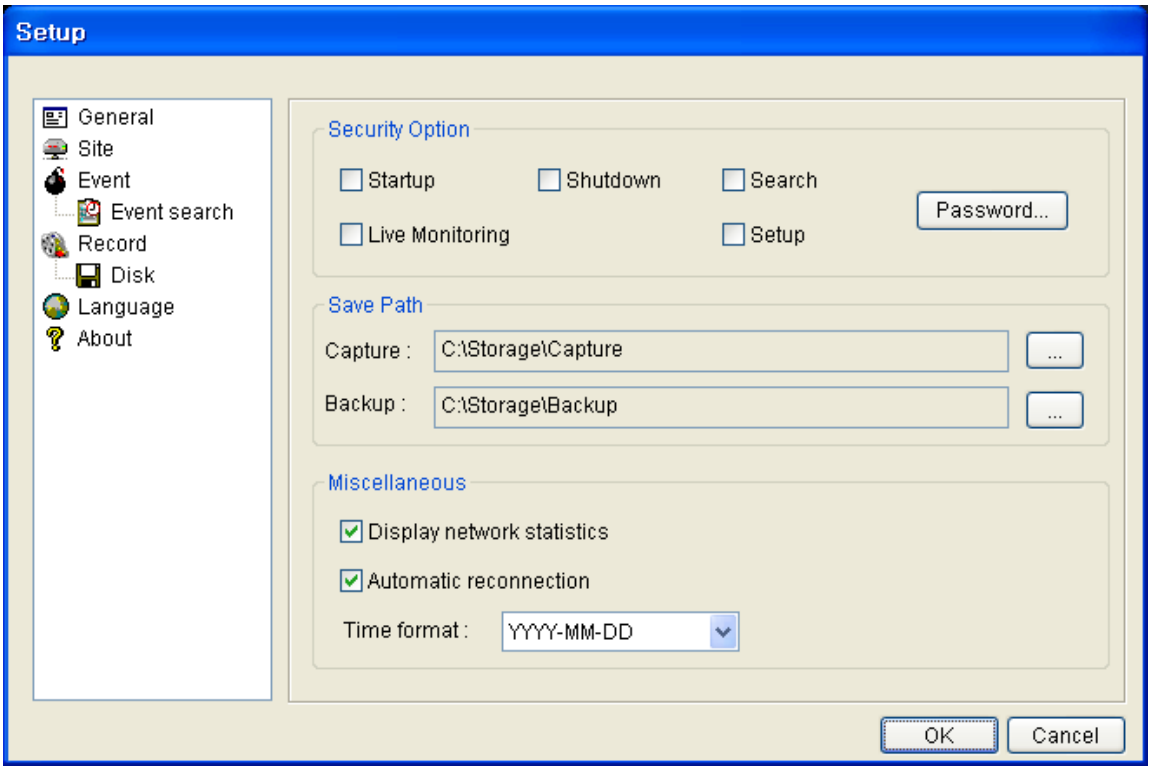

- **Security Option**: Set a password for security options. When you access any of the selected functions, you will need to enter the password.
- **Save Path**: Specify the location to record for backup and still image capture.
- **Automatic reconnection**: If a user selects this function, the client S/W will automatically try to connect to the previously connected IP address if the network connection is lost.
- **Display network statistics**: If a user selects this function, the client S/W will display network status, Bit rate and Frame rate.
- **Time Format**: Change the mode the Client software displays the time.

Setting Site

The remote DVRs can be added, modified, and removed.

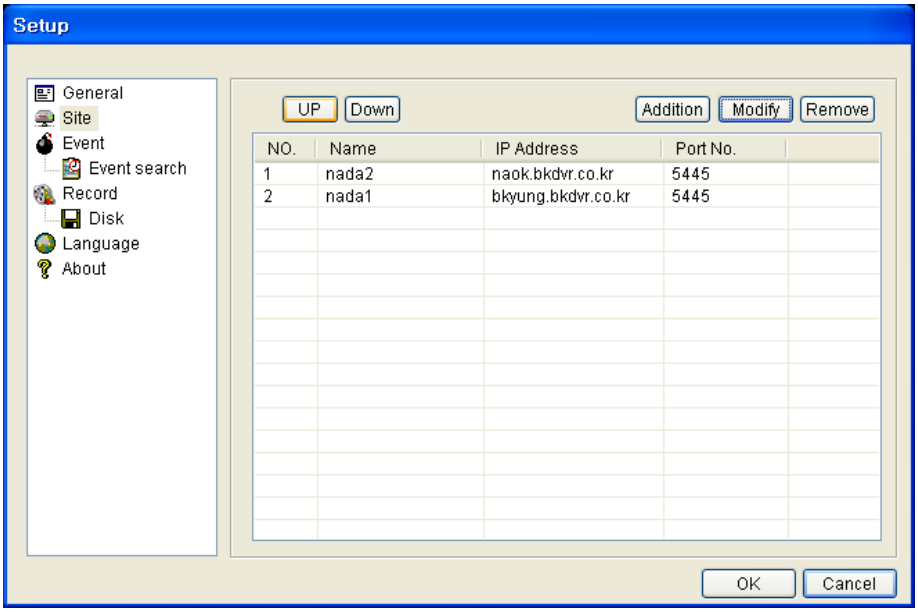

Setting Event

Set the record path and the size of local disk space for the log files.

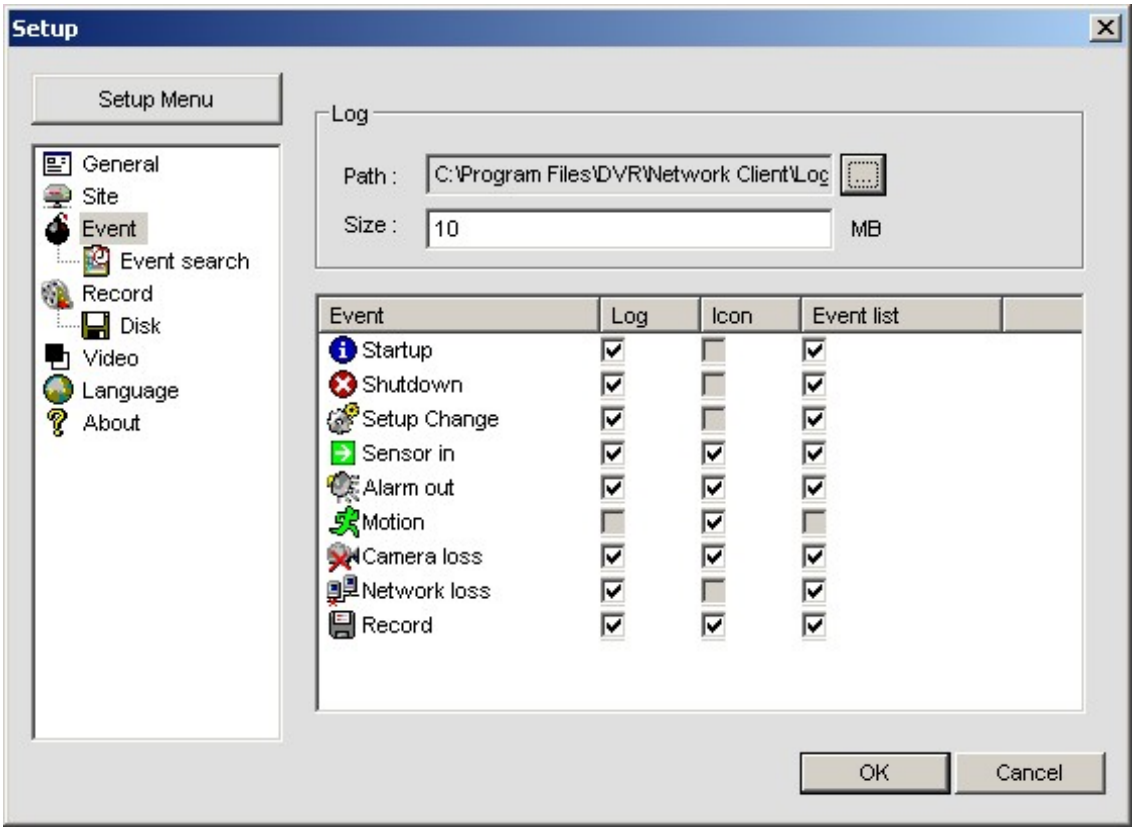

- LOG – Select to save event log into ‘log file’.
- ICON – Select to display the event on live video.
- EVENT LIST – Select to show the event in the ‘Event List” window of live mode.

Search and check the recorded log data.

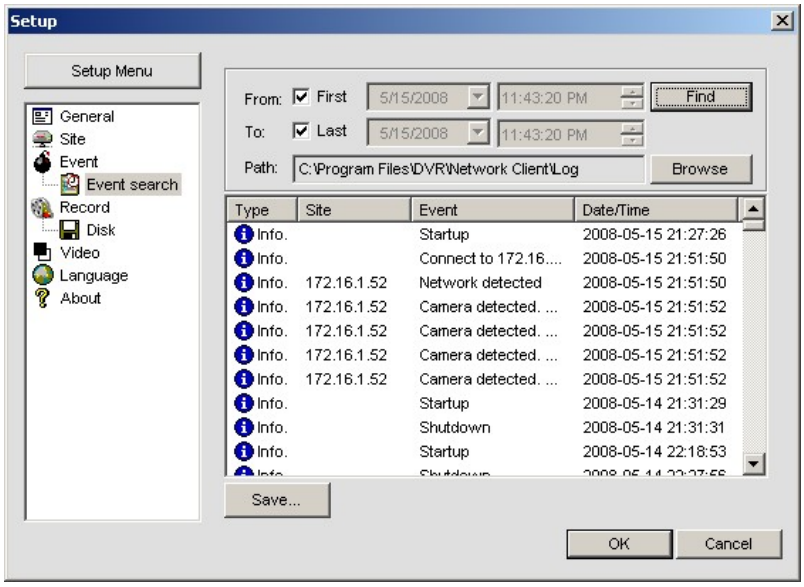

Setting Record

Set the recording conditions and select channels to record.

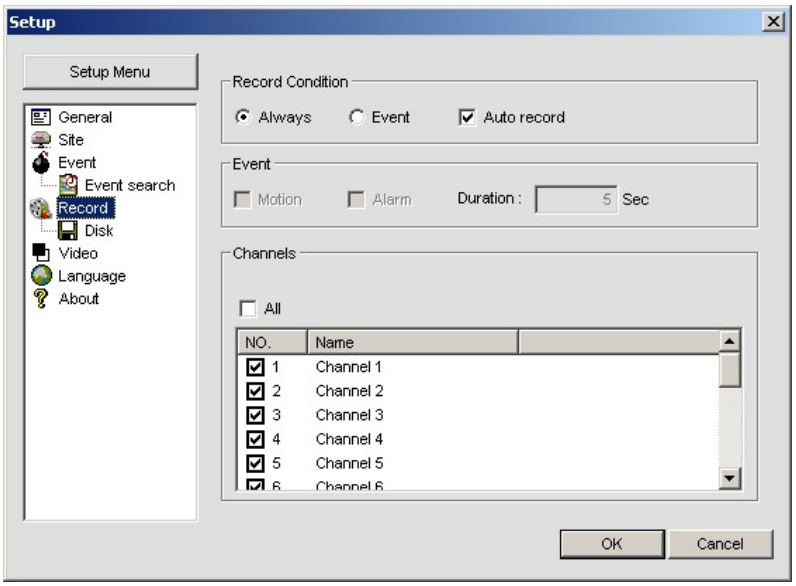

Select the local disk to use and the amount of disk space you want to allow the program to use for recording.

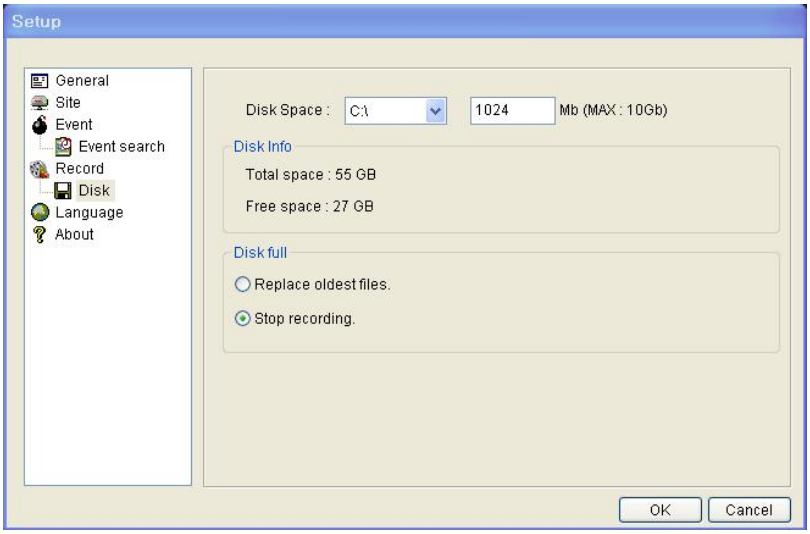

8. Multi-Sites Network Viewer

8-1. Overview

The UMS Multi-Client is a multiple site monitoring client software with; video, audio, and alarm signals from the DVRs over networks. The UMS Multi-Client does not limit the number of DVR units to register.

The program displays to up 256 live videos on one display and even playback videos window on the same or another display monitor.

On the program, user may control PTZF cameras on the DVRs. By attaching a microphone and speaker system to devices on site, user may make bi-directional audio communication over the network.

8-2. Minimum PC Requirements

CPU	Intel Pentium Ⅳ
	2Ghz
Memory	512MB or Higher is recommended.
VGA	128MB or Higher is recommended.
Resolution	1024x768
Disk space	1GB
OS	Windows 2000, XP Professional, XP Home, Vista (Some versions of Vista has problem in installation. Please contact your vendor for more information.)
Network	10/100Base T
Others	Direct X 8.1 or Higher

Before installing the program, check the PC specifications. The DVR remote software may not perform correctly if the PC does not meet the minimum requirements.

8-3. Installation of the Program

1. Insert the provided CD in the CD drive and double-click “UMSMultiClient (XXXX)**.exe**”

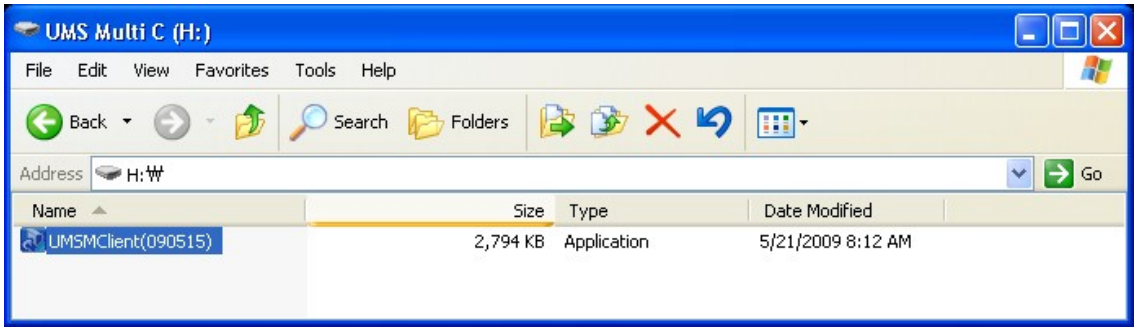
UMS Multi C (H:)
File Edit View Favorites Tools Help
Back Search Folders
Address H:₩
Go
Name Size Type Date Modified
UMSMClient(090515) 2,794 KB Application 5/21/2009 8:12 AM

2. Select a destination folder and click “Next”.

InstallShield Wizard
Choose Destination Location
Select folder where Setup will install files.
Setup will install UMS Client in the following folder.
To install to this folder, click Next. To install to a different folder, click Browse and select another folder.
Destination Folder
C:\Program Files\DVR\UMS Client
Browse...
InstallShield
< Back
Next >
Cancel

3. Select the program folder and click “Next”.

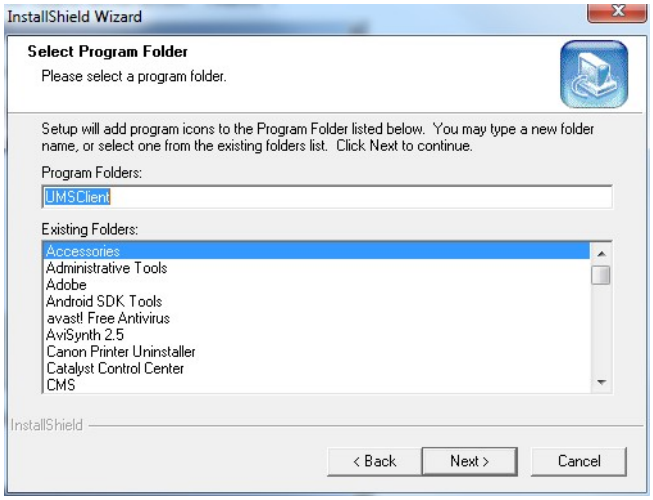

4. The installation status screen is displayed.

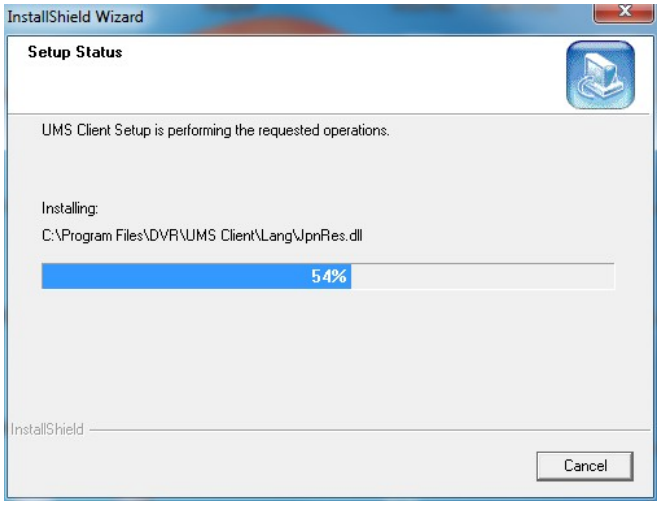

5. After the installation is completed, **“UMS Multi Client”** icon displays on the desktop screen.

8-4. Live Window

When installation is completed, double click the **"UMS Multi Client"** icon on your desktop to start the program.

8-4-1. Main User Interface

8-4-2. Control Buttons

Button	Description
LOCAL PLAYBACK	Click this icon to run a playback window to search and play videos that are recorded in the local PC.
REMOTE PLAYBACK	Click this icon to run a playback window to search and play videos that are recorded in the remote DVR.
SITE MANAGEMENT	THUMBNAIL REFRESH: Click this icon to refresh and renew thumbnail image of the connected sites. SITE ADDITION: Click this icon to open 'Site Addition' window. SITE DELETE: Click this icon to delete site from the index window, after disconnect a site. NET FINDER: Select the site from the index window and click this icon to modify the information of specific site.

CONNECT	Click this icon to connect the selected site/sites.
DISCONNECT	Click this icon to disconnect the selected site/sites.
SETUP	Click this icon to setup configuration of UMS MULTI CLIENT.
CAPTURE	Click this icon to capture a still image.
EVENT LIST	Opens list of events logged by the UMS Multi Client.
PAUSE	Click this icon to play/pause live video.
ALARM ON	
RECORD ON	Enable or disable recording of live video to local disk which has set in setup menu.
AUDIO	Use the volume control bar to set the audio level.
 MIC	Use the micro phone volume control bar to set the micro phone level.
	User can control PAN/TILT & ZOON/FOCUS. PAN left /right TILT up/down ZOOM in/out FOCUS in/out
 CHANNEL SPLIT	To select the numbers of display channel/channels (Single, quad, 9 channels, and 16 channels) of highlighted site.
 DVR SITE SPLIT	To select the numbers of DVR/DVRs (1 DVR, 4 DVRs, 9 DVRs, 16 DVRs) on main display screen.

8-5. Search and Playback Window

8-5-1. Main User Interface

You can access to search window by clicking the search icon (Local Playback / Remote Playback) on the upper left of the Live Window.

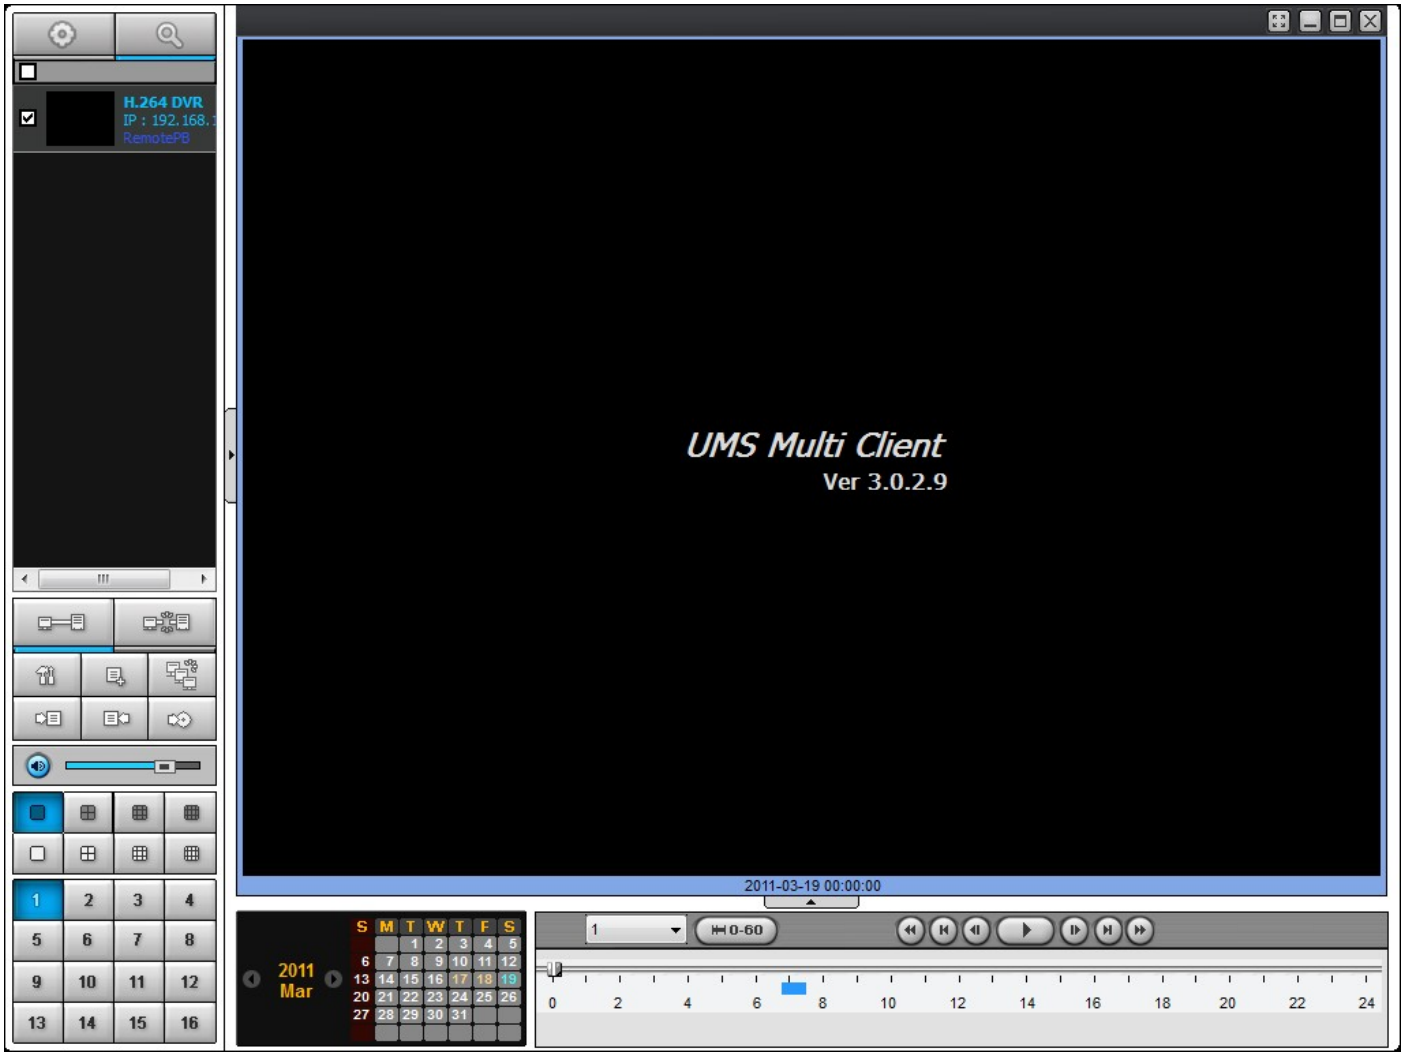

8-5-2. Main Control Panel

Button	Description
LOCAL PLAYBACK	Click this icon to run a playback window to search and play videos that are recorded in the local PC.
REMOTE PLAYBACK	Click this icon to run a playback window to search and play videos that are recorded in the remote DVR.
	Directory window shows site/sites that are pre-registered.

CONNECT	Click this icon to connect the selected site/sites.
DISCONNECT	Click this icon to disconnect the selected site/sites.
SETUP	Click this icon to setup configuration of UMS MULTI CLIENT.
CAPTURE	Click this icon to capture a still image.
EVENT LIST	Opens list of events logged by the UMS Multi Client.
MARK IN	Click this icon to set the beginning time for backup of the recorded video in AVI format.
MARK OUT	Click this icon to set the ending time for backup of the recorded video in AVI format.
BACKUP	Click this icon to backup the recorded video in AVI format.
AUDIO	Use the volume control bar to set the audio level.
	To select the numbers of DVR/DVRs (1 DVR, 4 DVRs, 9 DVRs, 16 DVRs) on main display screen.
	To select the numbers of display channel/channels (Single, quad, 9 channels, and 16 channels) of highlighted site.
	To select the channel to playback.
	The calendar shows dates with recorded video in color.
	To display the recorded data of selected channel or all channels on a time line scale.
	To change a timeline scale from 24 hours to 60 minutes. The timeline shows recorded data in color on the bar. You can adjust the timeline scale and move it to the time you wish to playback. Then click the play icon to display the recorded video.
	Playback buttons.

8-6. Operation

8-6-1. Addition, Delete, and Modify of DVR Sites

8-6-1-1. Addition of Sites

1. Click SITE ADDITION button. And then the following window will be displayed as below.

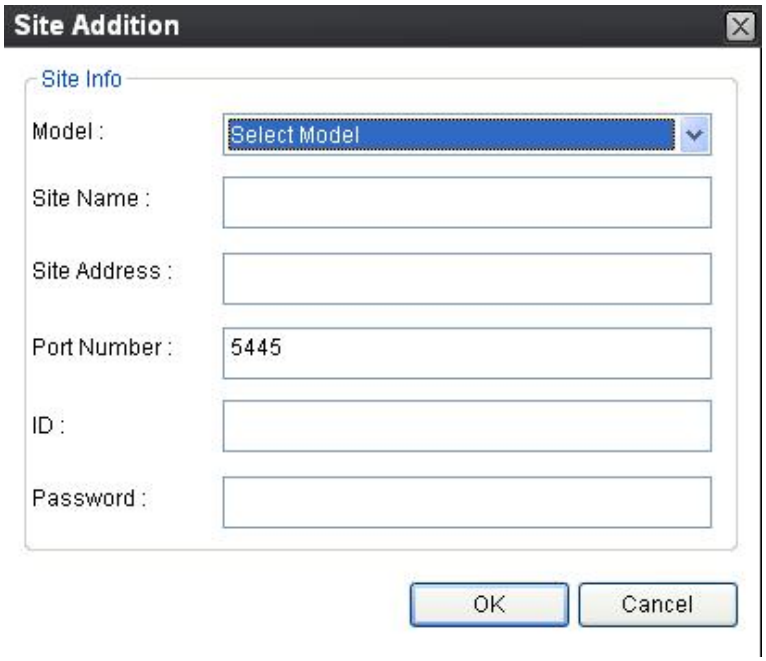

- Model: User has to select the proper DVR model.
  SDVR series, H series DVR
  N series DVR, HD DVR
  IP Camera
- Site Name: Input a name that properly describes a site.
- IP Address: Input IP address (Public IP address of a router that DVR is connected.) or Domain name.
- Port No.: Input port number of DVR. **Default Port Number is "5445".**
- ID: Input ID of DVR. **Default ID is "admin".**
- Password: Input network password of DVR. **Default Password is "1111".**

2. Click OK button. And then the registered site is added on the directory window.

8-6-1-2. Delete of Sites

1. Select the site/sites to delete from the directory window.

2. Click SITE DELETE button. And then the selected site/sites is/are deleted.

8-6-1-3. Modify of Sites

1. Select the site/sites to modify from the directory window.

2. Click NET FINDER button. And then the following window will be displayed as below.

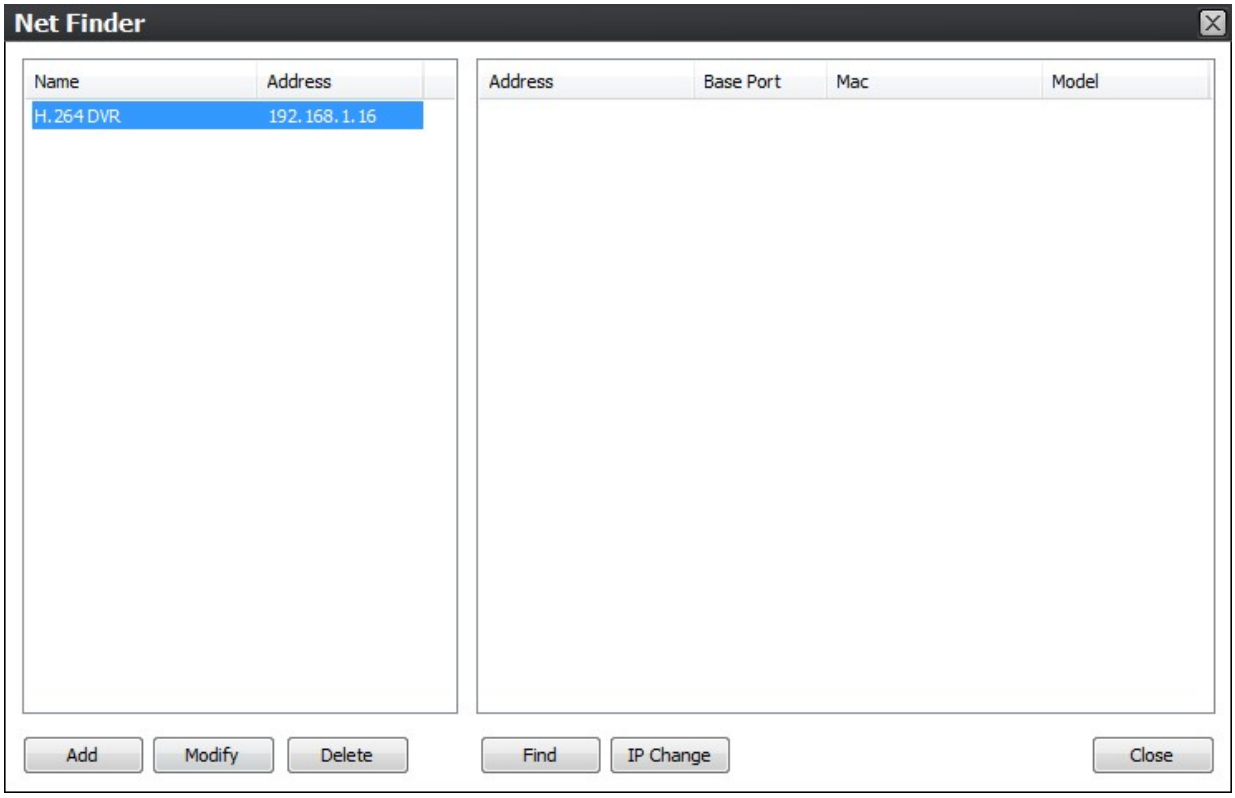

3. Click MODIFY button. And then the modified information is applied.

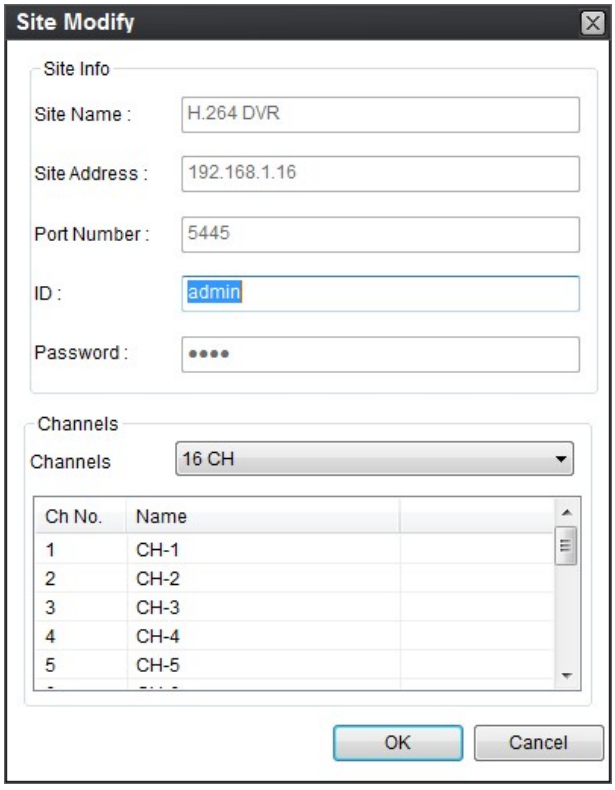

8-6-2. Connect and Disconnect

8-6-2-1. Connect

1. Select site/sites to connect from the directory window.

2. Click CONNECT button, and then site/sites displays/display as connected.

8-6-2-2. Disconnect

1. Select site/sites to disconnect from the directory window.

2. Click DISCONNECT button, and then selected site/sites disconnected.

8-6-3. Still-image Capture During Live

1. Double-click a channel to capture from the display screen. (Otherwise all channels will be captured.).

2. Click CAPTURE button. And then a Capture window will be displayed as below.

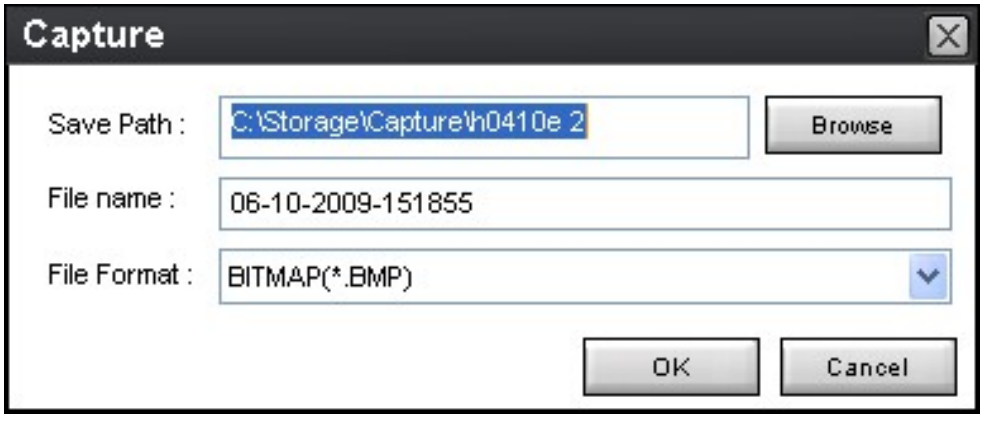

3. Set Save path, File Name, and File Format. And then click OK button.
4. Still image is saved as set in Capture window.

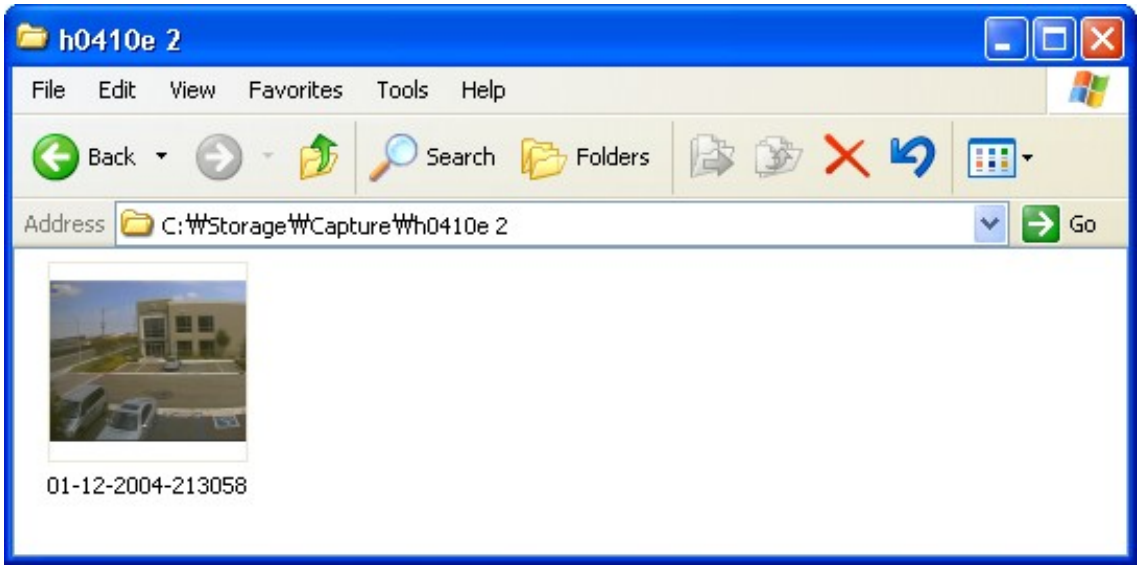

8-6-4. Recording Video on Local PC during Live

1. Click SETUP button. And then a setup window will be displayed as below.
2. Select Record and set the values.

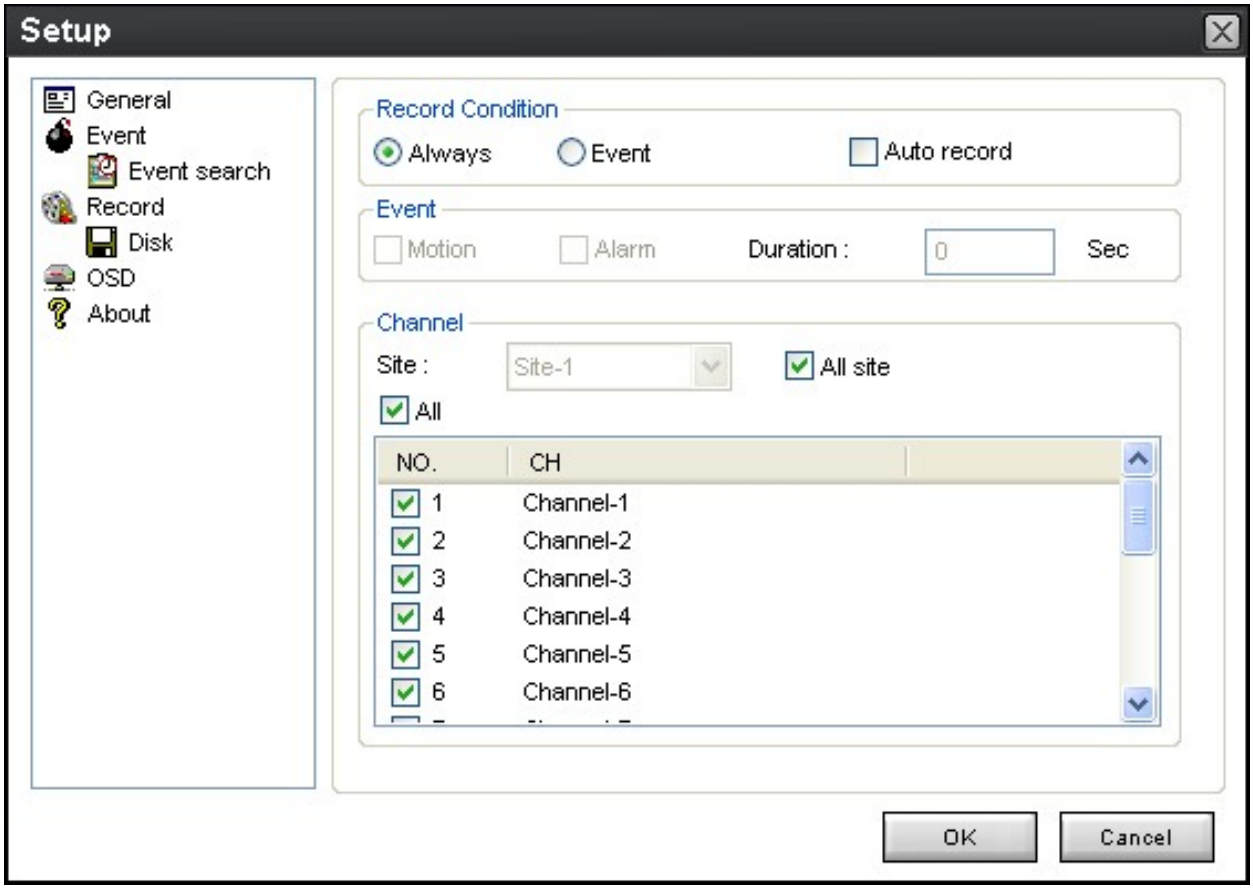

3. Select Disk and set the values.

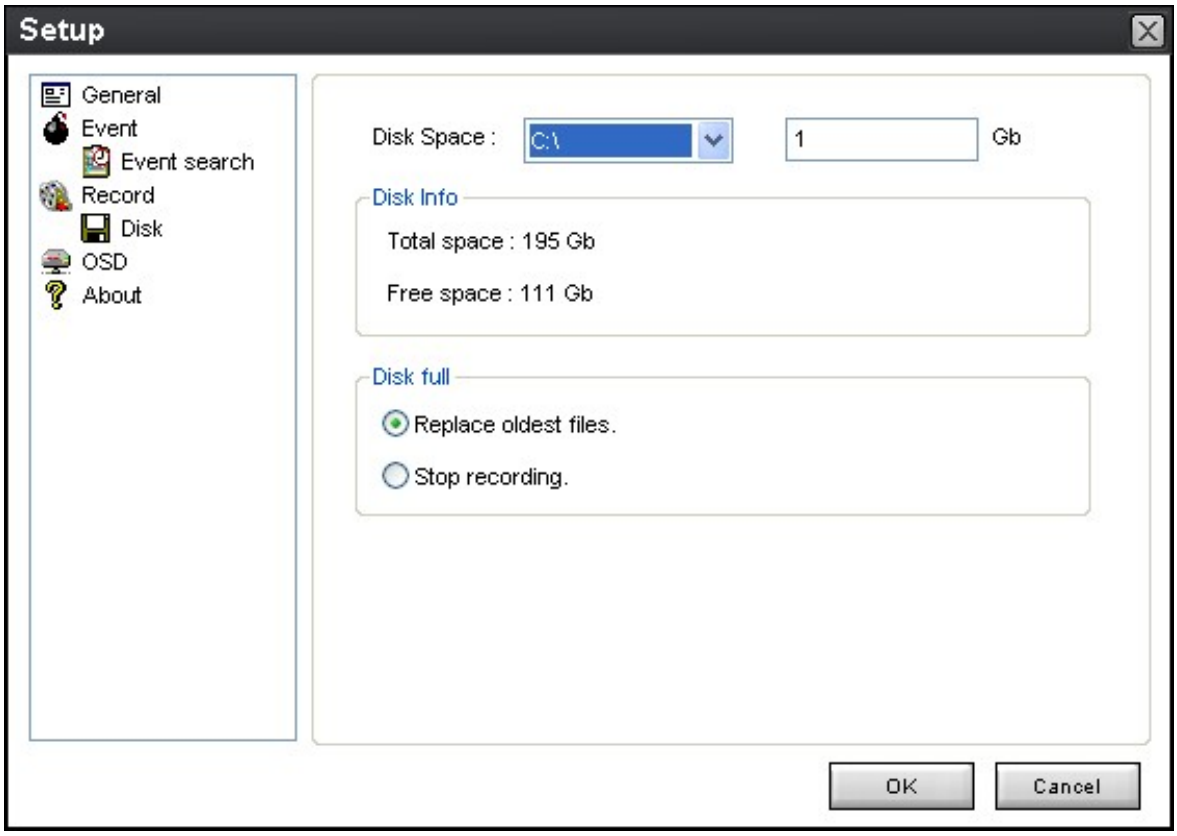

4. Click RECORD ON button. And the color of button is changed.

5. Live video data is recorded as set in Record and Disk setup. These video data can be searched and play-backed with Local Playback.

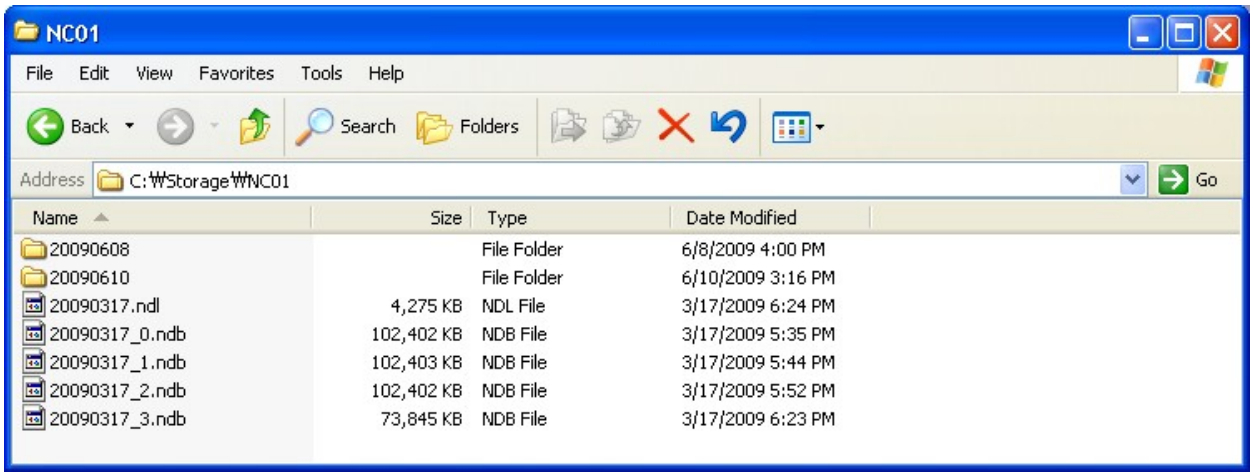
NC01
File Edit View Favorites Tools Help
Back
Search
Folders
Address C:₩Storage₩NC01
Go
Name Size Type Date Modified
20090608 File Folder 6/8/2009 4:00 PM
20090610 File Folder 6/10/2009 3:16 PM
20090317.ndl 4,275 KB NDL File 3/17/2009 6:24 PM
20090317_0.ndb 102,402 KB NDB File 3/17/2009 5:35 PM
20090317_1.ndb 102,403 KB NDB File 3/17/2009 5:44 PM
20090317_2.ndb 102,402 KB NDB File 3/17/2009 5:52 PM
20090317_3.ndb 73,845 KB NDB File 3/17/2009 6:23 PM

8-6-5. Local Playback and Remote Playback

8-6-5-1. Playback of recorded video on local PC

1. Click LOCAL PLAYBACK button. And then Playback Window will be displayed over the Live Window.

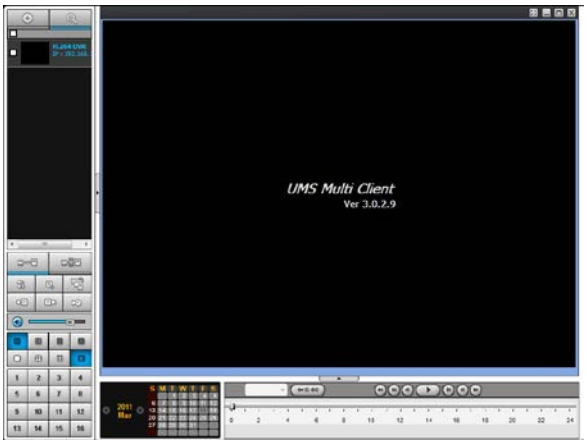

2. Select site/sites to connect from the directory window.

3. Click CONNECT button. And then Green bar displays on Search calendar and timeline scale window.

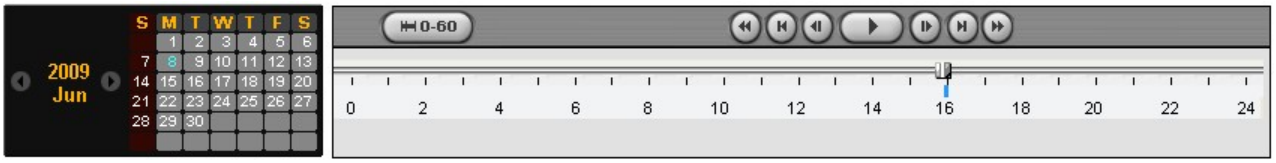

4. Move the marker on the timeline scale to where there is video data and press the PLAY button.

5. Video data that is recorded on local PC will be play-backed.

8-6-5-2. Playback of Recorded Video on Remote DVR

1. Click  REMOTE PLAYBACK button. And then Playback Window will be displayed over the Live Window.

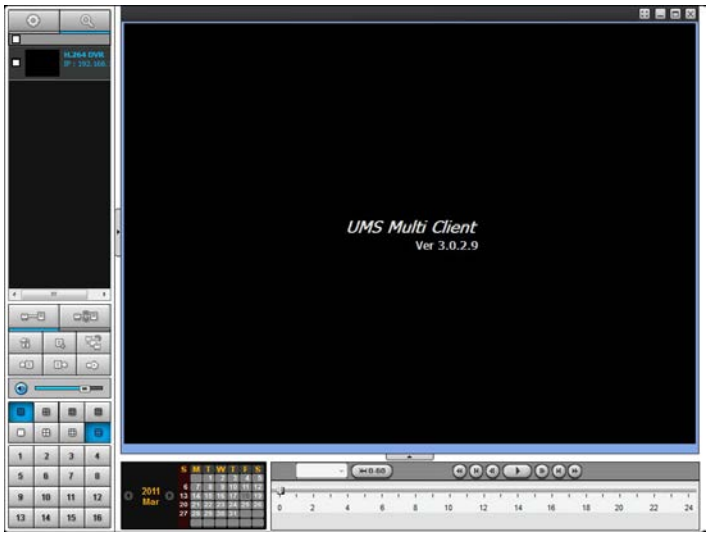

2. Select the site to connect from the directory window.

3. Click CONNECT button. And then Green bar displays on Search calendar and timeline scale window.

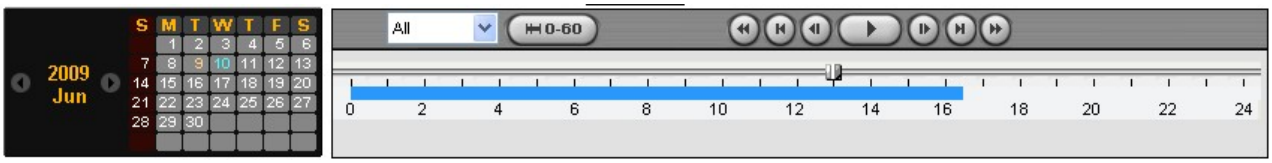

4. Move the marker on the timeline scale to where there is video data and press the PLAY button.



5. Video data that is recorded on the remote DVR is play-backed.

8-6-6. AVI Backup During Playback

You can back up the recorded videos in AVI format during playback.

1. Double-click the target channel to backup.

2. Select the beginning time by using the search calendar and timeline scale bar.

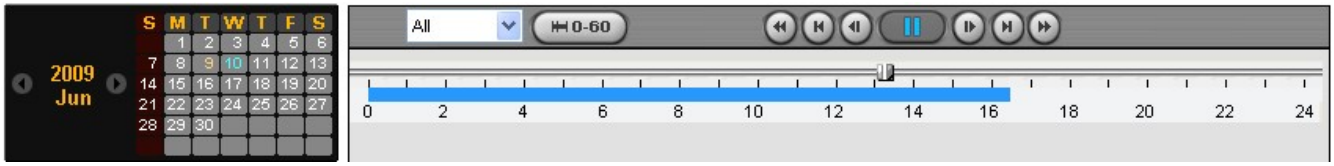

3. Click MARK IN button on the timeline scale to select the beginning point of the backup.

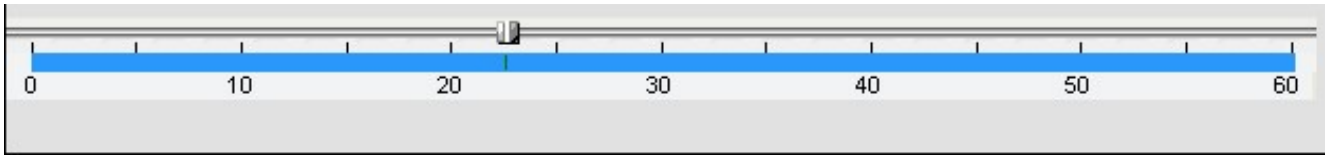

4. Click  MARK OUT button on the timeline scale to select the ending point of the backup. Then, the selected starting point and the ending point on the timeline scale bar will be marked in green.

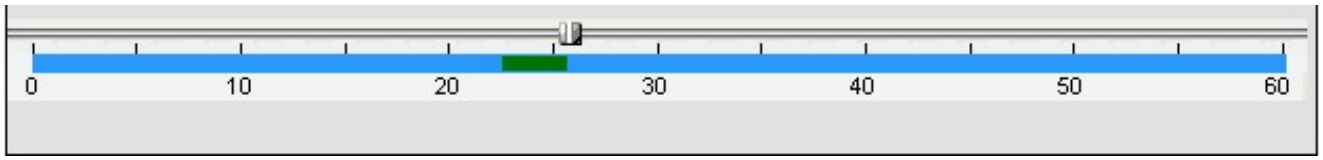

5. Click BACKUP. And then the BACKUP window will be displayed as below.

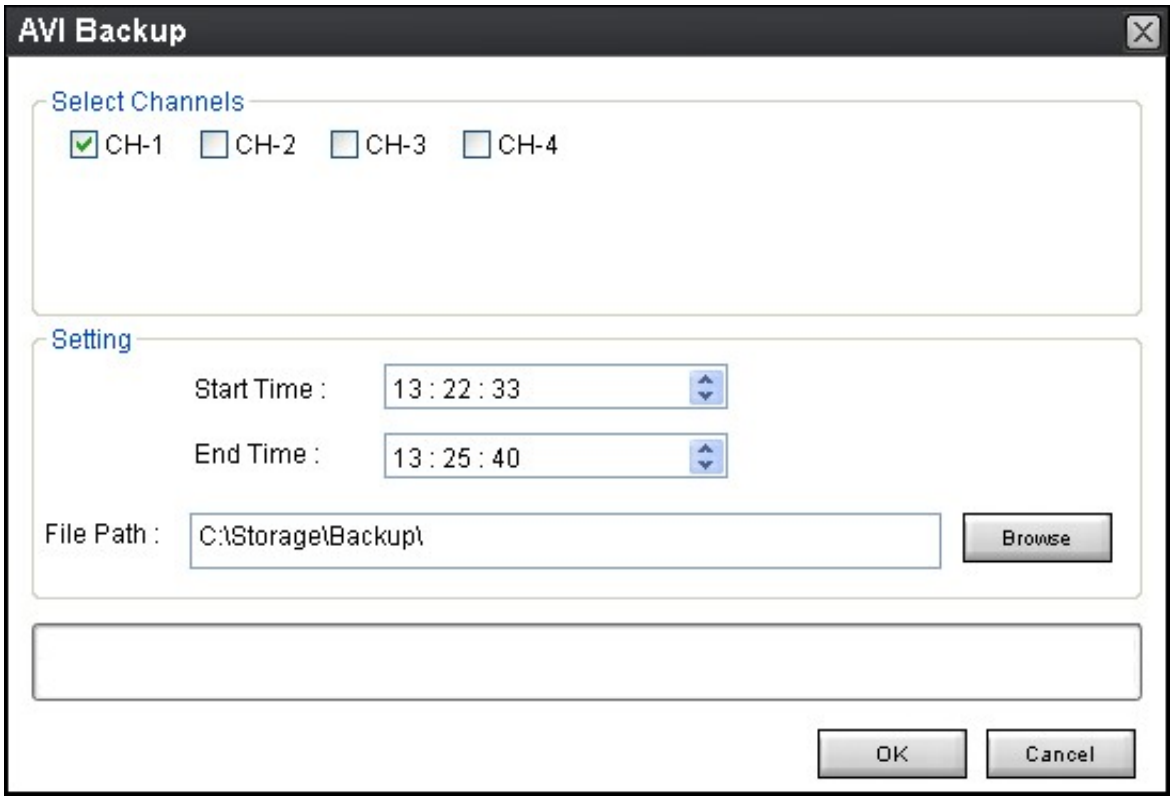

6. You can also set the beginning time and ending time on this window. After selecting a channel for backup, click the OK button. The backup will begin.

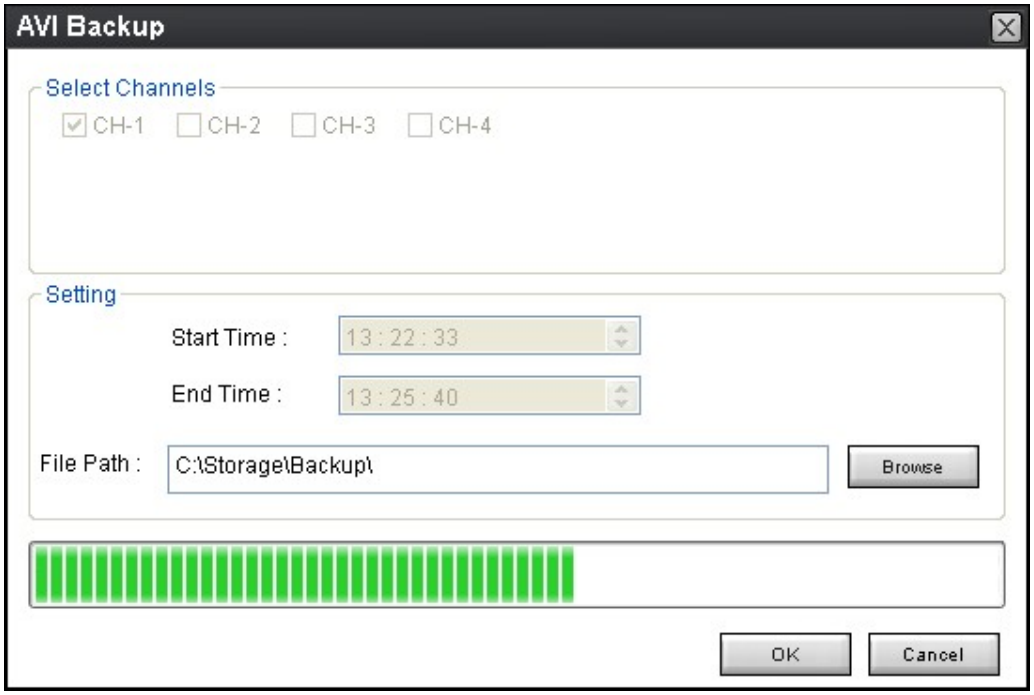

7. AVI video data is recorded as set in AVI Backup window. AVI format video can be played back by Window Media Player™ or other media player that is compatible with AVI format video.

Notice

When backing up as a NSF format, the user can playback using the DVR Player, which is downloaded into the USB flash drive or the DVD-R with the backup data.

9. Web-Browser Viewer

The DVR provides a live remote monitoring feature by web-browser viewer. (NOTE: Web-Brower is only available for Internet Explorer)

1. Check the IP address of the DVR from SETUP>SYSTEM>DESCRIPTION>IP ADDRESS.

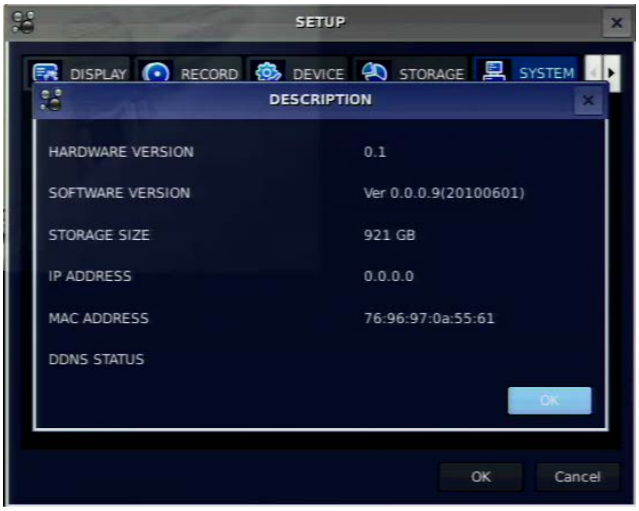

2. Input the IP address or Domain name address.

3. Click this bar. Then the dialog box is displayed.

4. Click “Install” to download and install the Active-X control.

Internet Explorer - Security Warning
Do you want to install this software?
Name: WebViewer
Publisher:
More options
Install
Don't Install
While files from the Internet can be useful, this file type can potentially harm your computer. Only install software from publishers you trust. What's the risk?

5. The Web Browser Viewer will be displayed as below after the Active-X installation.

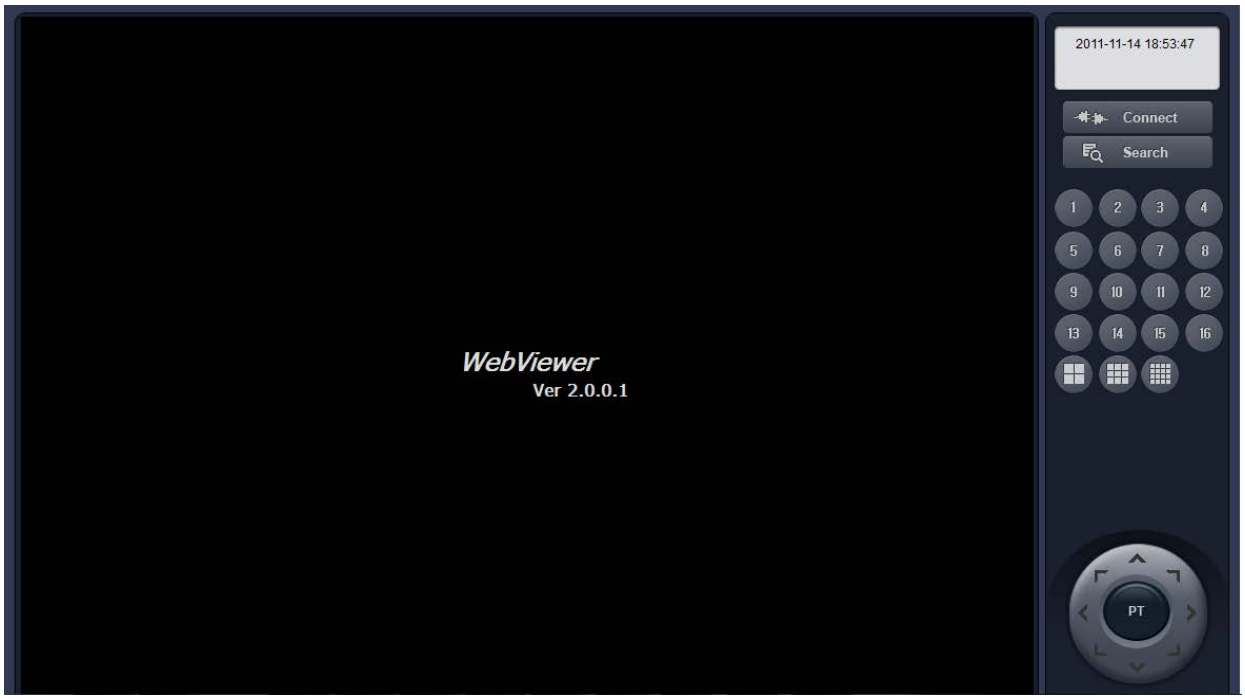

6. Click the CONNECT button on the Left upper corner of web-viewer. Then “Connect” dialog is displayed. Enter IP address (or Domain name address that you pre-registered on www.ddnscenter.com, Port number and Password and click “Connect”

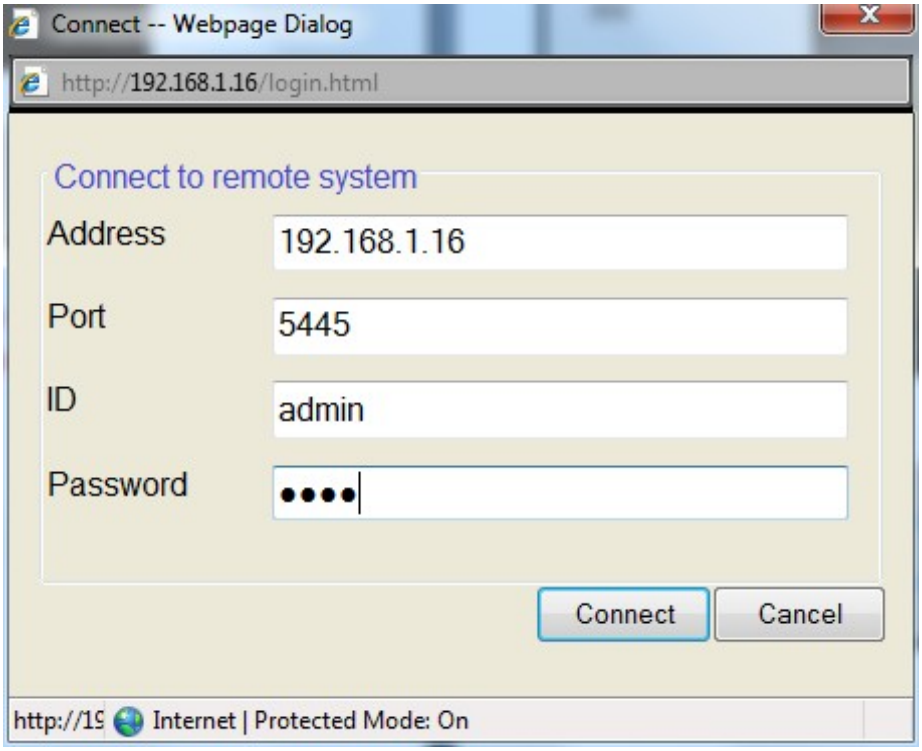

- Site Name: Input a name that properly describes a site.
- IP Address: Input IP address (Public IP address of a router that DVR is connected.) or Domain name.
- Port No.: Input port number of DVR. **Default Port Number is “5445”.**
- ID: Input ID of DVR. **Default ID is “admin”.**
- Password: Input network password of DVR. **Default Password is “1111”.**

7. Then the cameras connected to the DVR are displayed on the screen.

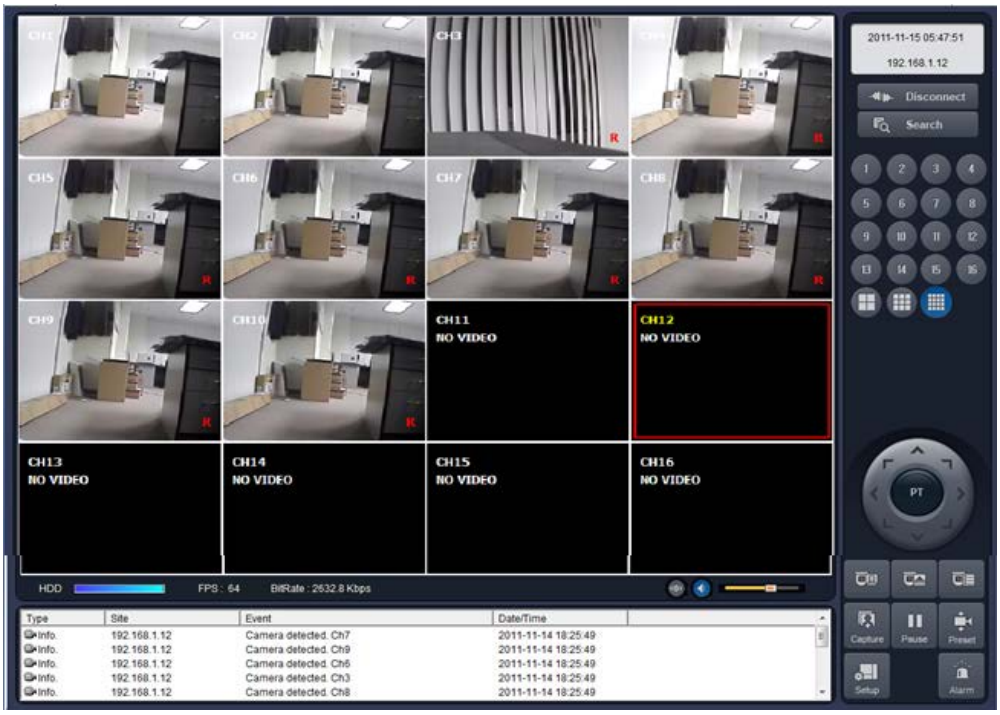

8. SETUP: The menu settings for the DVR unit can be set from a PC, via network. Refer to the detail of Remote Setup description of UMS Multi Client.

10. Remote Setup

- Remote Setup Access from CMS: Select REMOTE SETUP button.

- Remote Setup Access from WEB VIEWER: Select SETUP button.

- Remote Setup Access from Single Client VIEWER: RIGHT-Click over live display and select REMOTE SETUP button.

Then the setup window is displayed. The specified menu screen is displayed on the upper left of the screen. Setting is the same as with the DVR menu setting. Refer to the corresponding pages for details on the setting items. Enter the password of the DVR when prompted. (NOTE: The default password is 1111)

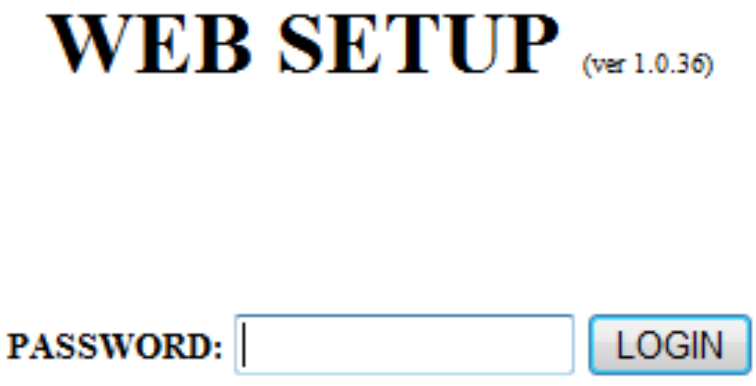

10-1. DISPLAY

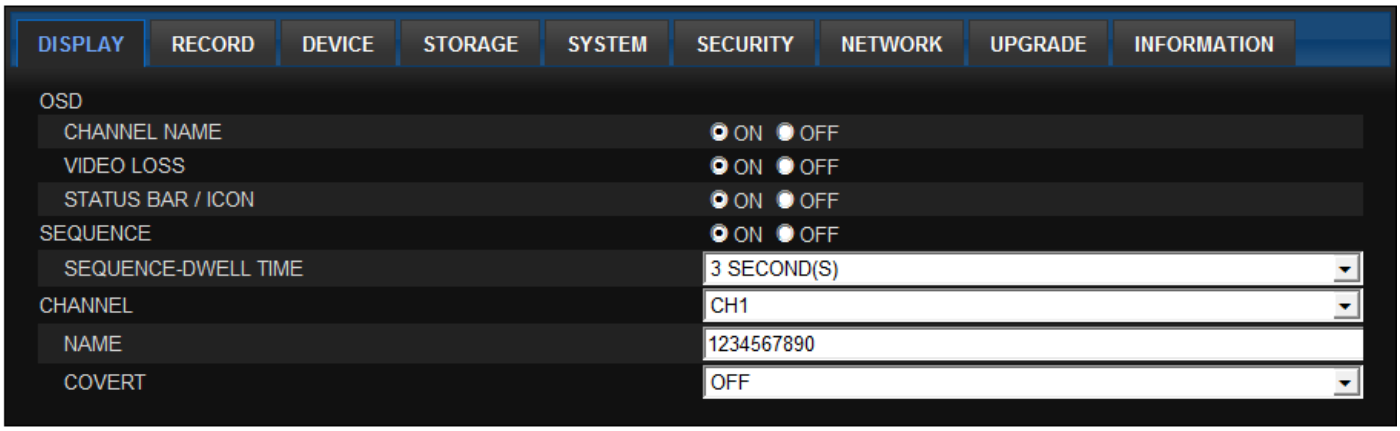

- **OSD –** ON/OFF (Turn ON/OFF the On Screen Displays)
  - **CHANNEL NAME**: Show/Hide channel name
  - **VIDEO LOSSS**: Show/Hide VIDEO LOSS
  - **STATUS BAR / ICON**: Show/Hide status bar or icon
- **SEQUENCE –** ON/OFF (Turn ON/OFF the Sequence)
  - **SEQUENCE-DWELL TIME –** 3 ~ 60 SECONDS (Set the SEQUENCE-DWELL TIME)
- **CHANNEL –** CH 1 ~ CH 16 (Select the channel to make adjustments)
  - **NAME –** Allows the user to change the default CHANNEL NAME.
  - **COVERT –** ON/OFF (Allows the user to turn ON/OFF COVERT for the highlighted CHANNEL)

10-2. RECORD

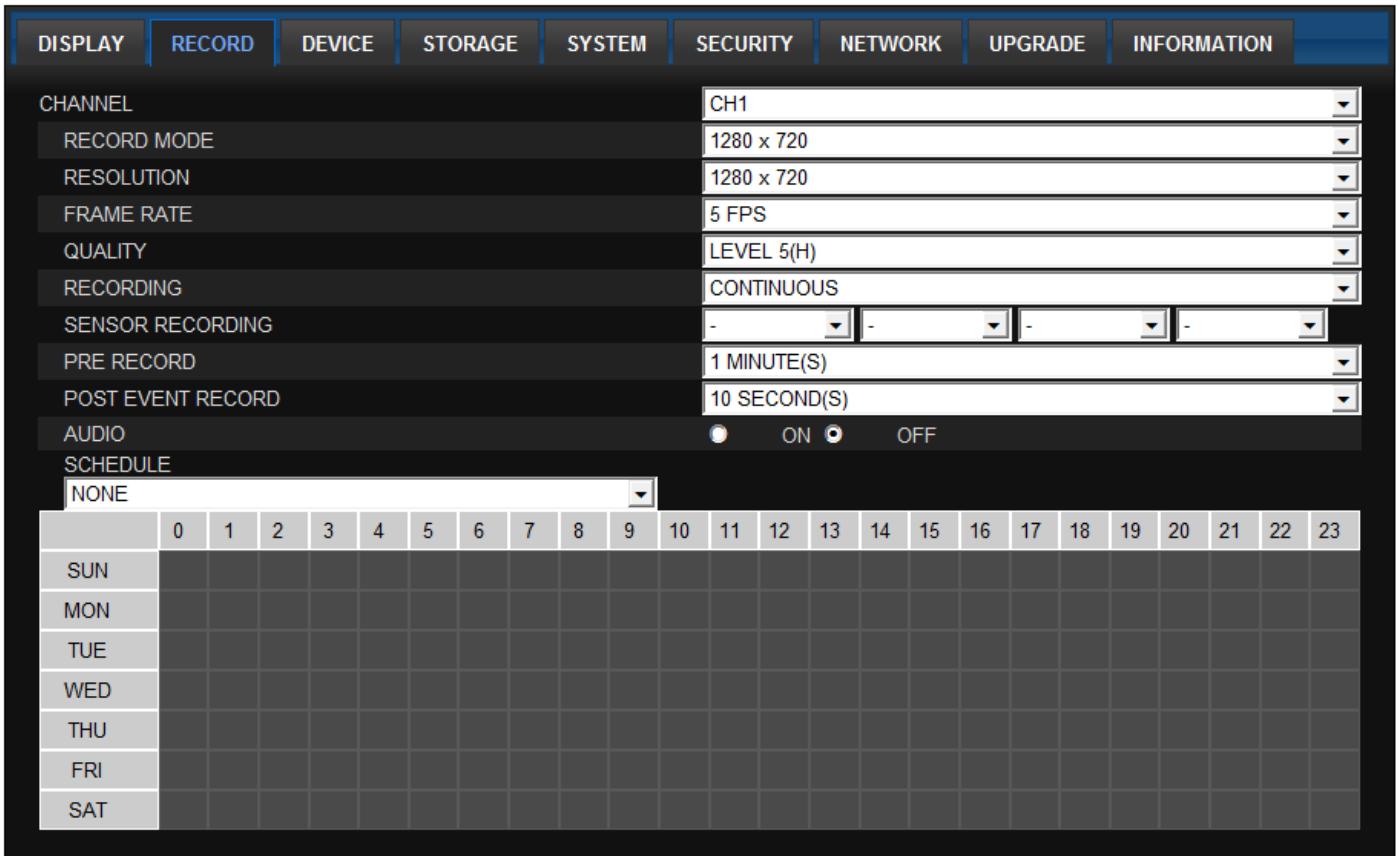

- **CHANNEL –** Allows the user to select CHANNEL to make adjustments.
  - **RECORD MODE–** Allows the user to change the recording mode.
  - **RESOLUTION –** Allows the user to change the recording RESOLUTION of the selected CHANNEL.
  - **FRAME RATE –** # ~ # (Allows the user to change the recording FRAME RATE of the selected CHANNEL)
  - **QUALITY –** LEVEL 1 ~ LEVEL 5 (Allows the user to change the recording QUALITY of the selected CHANNEL)
  - **RECORDING –** CONTINUOUS, MOTION, SENSOR, SCHEDULE, DISABLE (Allows the user to change the RECORDING type of the selected CHANNEL)
  - **SENSOR RECORDING –** Allows the user to set up to 4 sensors for selected CHANNEL.
  - **PRE RECORD –** OFF, 15 SECONDS, 30 SECONDS, 1 MINUTE, 3 MINUTES, 20 MINUTES (Allows the user to set PRE RECORDING for selected CHANNEL)
  - **POST EVENT RECORD –** 10 SECONDS ~ 30 SECONDS, 60 SECONDS (Allows the user to set POST EVEN RECORDING for selected CHANNEL)
  - **AUDIO –** ON/OFF (Allows the user to turn ON/OFF AUDIO recording for selected channel)

10-3. DEVICE

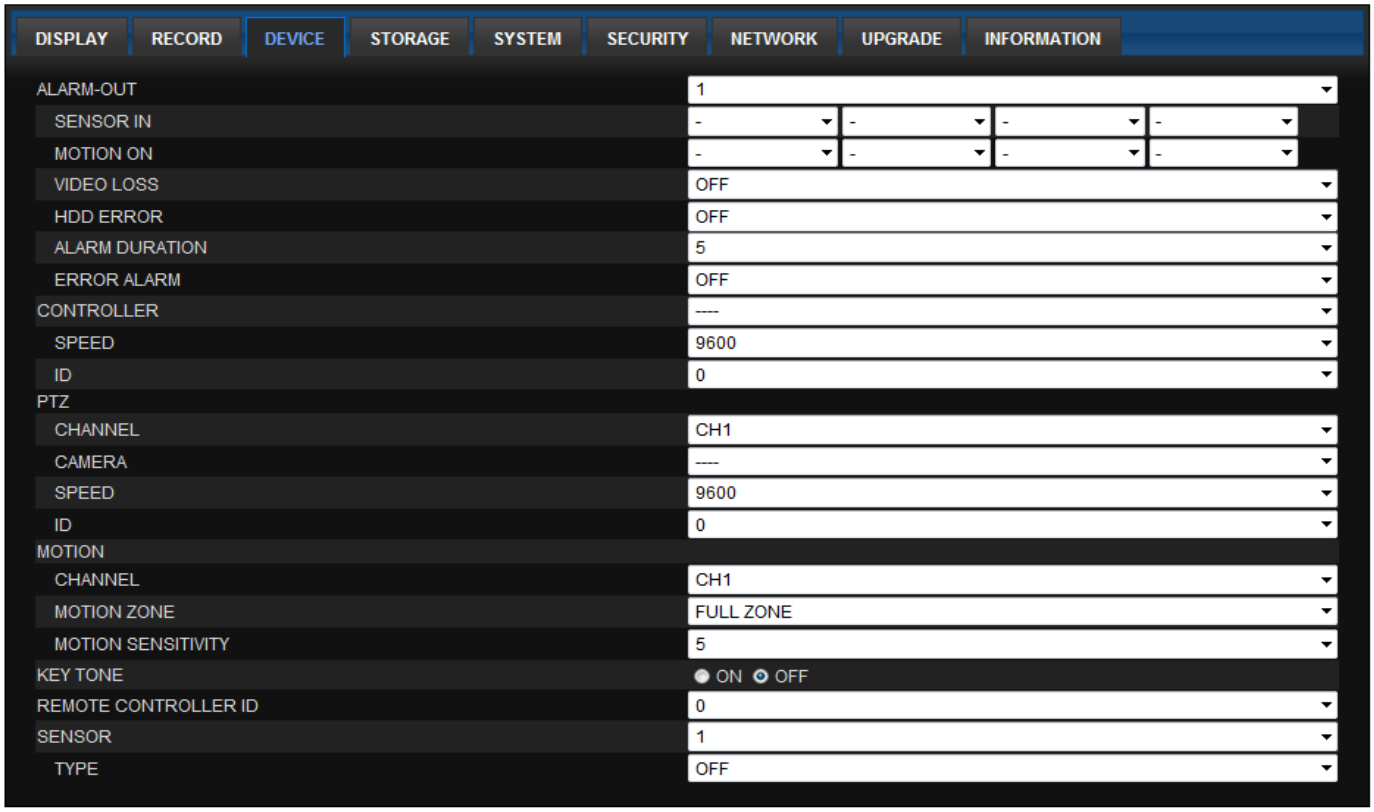

- **ALARM-OUT –** 1 ~ 4 (Allows the user to select a specific alarm output terminal)
  - **SENSOR IN –** Allows the user to set ALARM-OUT when SENSOR-IN is triggered.
  - **MOTION ON –** Allows the user to set ALARM-OUT when MOTION is triggered.
  - **VIDEO LOSS ON –** Allows the user to set ALARM-OUT when VIDEO LOSS is detected.
  - **ALARM DURATION –** 1 SECOND ~ 60 SECONDS (Allows the user to set ALARM-OUT DURATION)
  - **ERROR ALARM –** OFF, ALL, HDD ERROR, VIDEO LOSS (Allows the user to set ERROR ALARM for SPECIFIC ERROR)
- **CONTROLLER –** Allows the user to select CONTROLLER protocol
  - **SPEED** – Allows the user to select CONTROLLER SPEED
  - **ID** – Allows the user to select CONTROLLER SPEED
- **CAMERA PTZ** – Allows the user to select PTZ CAMERA CHANNEL
  - **NAME** – Allows the user to select PTZ protocol
  - **SPEED** – Allows the user to set PTZ SPEED
  - **ID** – Allows the user to select PTZ ID
- **MOTION**
  - **CHANNEL –** CH 1 ~ 16 (Allows the user to select CHANNEL for MOTION setting)
  - **MOTION ZONE –** FULL ZONE, PARTIAL ZONE (Allows the user to select MOTION ZONE)
  - **MOTION SENSITIVITY –** 1 ~ 9 (Allows the user to set MOTION SENSITIVITY)
- **KEY TONE –** OFF, ON (Allows the user to turn KEY TONE OFF or ON)

- **REMOTE CONTROLLER ID –** 00 ~ 99 (Allows the user to set REMOTE CONTROL ID)
- **SENSOR –** Allows the user to select SENSOR Number
    - **TYPE –** OFF, NORMAL OPEN, NORMAL CLOSE (Allows the user to set SENSOR TYPE)

10-4. STORAGE

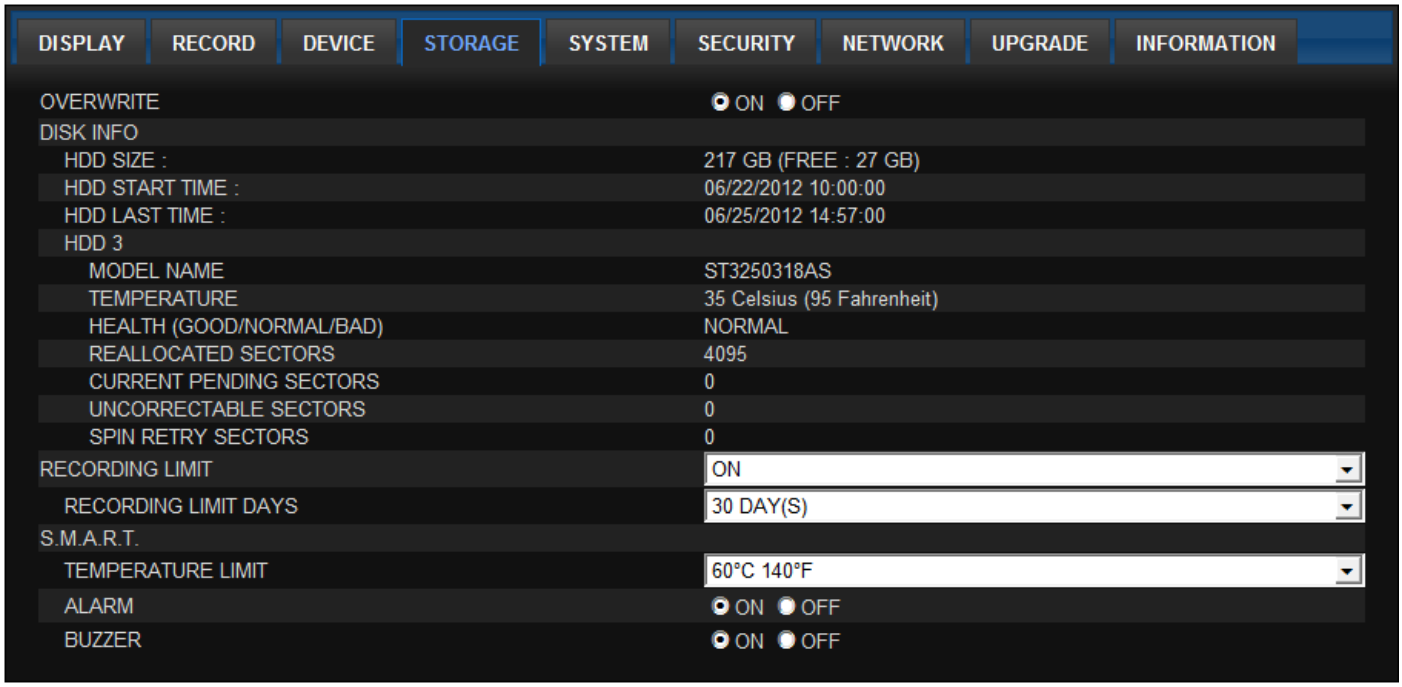

- **OVERWRITE –** ON, OFF (Allows the user to set OVERWRITE of the HDD ON or OFF)

  NOTE: Enabling OVERWRITE will allow the DVR to write over previously recorded data, starting with the oldest date, when the HDD is FULL. If OVERWRITE is OFF, the DVR will not record any new data once the HDD becomes full.
- **DISK INFO –** Show the detailed information of hard disk drive.
- **RECORDING LIMIT –** OFF, ON (Allows the user to set the RECORDING LIMIT)
    - **RECORDING LIMIT DAYS –** 1 DAY ~ 90 DAYS (Allows the user to set RECORDING LIMIT DAYS)
- **S.M.A.R.T –** Allows the user to set S.M.A.R.T feature.
    - **TEMPERATURE LIMIT –** 20 ~ 55 (Allows the user to set the HDD TEMPERATURE LIMIT to trigger ALARM and BUZZER)

      NOTE: The recommended operating temperature for HDD is between 104F to 122F.
    - **ALARM –** ON, OFF (Allows the user to set ALARM ON or OFF)
    - **BUZZER –** ON, OFF (Allows the user to set BUZZER ON or OFF)

10-5. SYSTEM

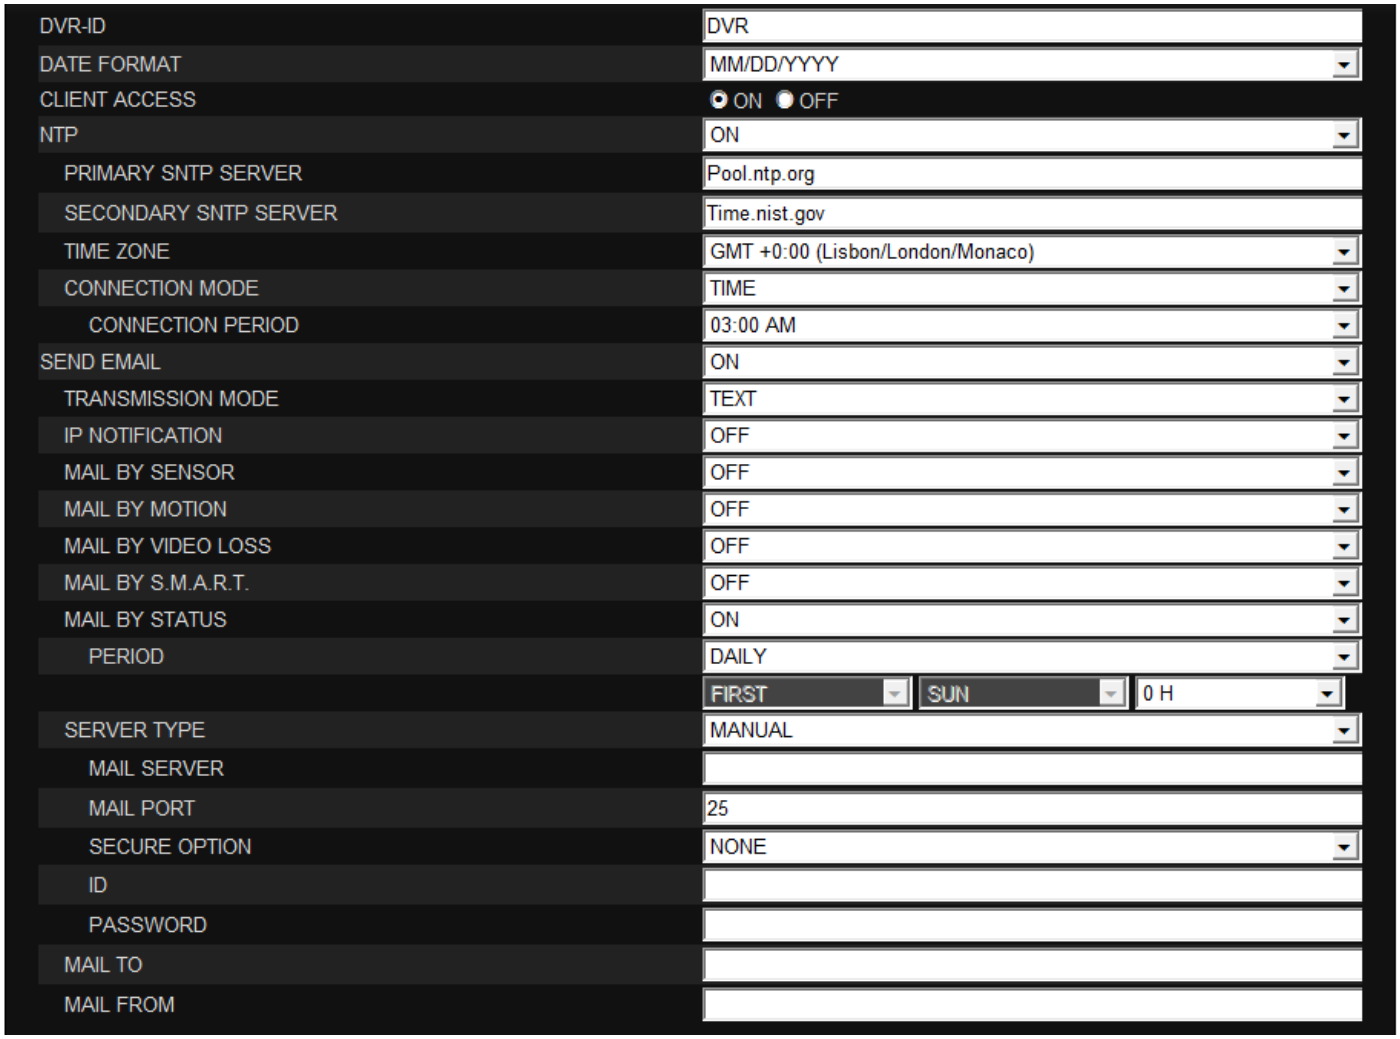

- **DVR-ID –** Allows the user to change the DVR ID
- **DATE FORMAT –** Allows the user to change the DATE FORMAT display from the following; YYYY/MM/DD, MM/DD/YYYY, DD/MM/YYYY, YYYY-MM-DD, MM-DD-YYYY, DD-MM-YYYY.
- **NTP –** OFF, ON (Allows the user to set NTP OFF or ON)
    - **PRIMARY SNTP SERVER –** PRIMARY SNTP (Simple Network Time Protocol) SERVER
    - **SECONDARY SNTP SERVER –** SECONDARY SNTP (Simple Network Time Protocol) SERVER
    - **TIME ZONE –** Allows the user to set the TIME ZONE
    - **CONNECTION MODE –** INTERVAL, TIME, ONCE (Allows user to select the SNTP CONNECTION MODE)
        - **CONNECTION PERIOD –** Allows the user to set the SNTP Synchronize CONNECTION PERIOD when setting the CONNECTION MODE to INTERVAL or TIME
- **SEND EMAIL –** OFF, ON (Allows the user to set SEND EMAIL OFF or ON)
    - **TRANSMISSION MODE –** IMAGE (Transmits an IMAGE of the triggered ALARM-OUT CHANNEL)

- **IP NOTIFICATION –** OFF, ON (Allows the user to set IP NOFICIATION ON or OFF)
- **MAIL BY SENSOR –** OFF, ON (Allows the user to set SENSOR NOTIFICATION ON or OFF)
- **MAIL BY MOTION –** OFF, ON (Allows the user to set MODITION DETECTION ON or OFF)
- **MAIL BY VIDEO LOSS –** OFF, ON (Allows the user to set VIDEO LOSS NOTIFICATION ON or OFF)
- **MAIL BY S.M.A.R.T –** OFF, ON (Allows the user to set S.M.A.R.T NOTIFICATION ON or OFF)

- **MAIL BY STATUS: Set up how many time the mail send. Daily, Weekly, Monthly**
- **SERVER TYPE: MANUAL, GMAIL, HOTMAIL, AOL, YAHOO**
- **MAIL SERVER:** Enter the appropriate mail server information to enable sending daily e-mail reports using a virtual keyboard.
- **MAIL PORT:** Allows the user to set E-MAIL PORT
- **SECURE OPTION: –** NONE, SSL, TLS (Allows the user to select E-MAIL SECURE OPTION)
- **ID:** To set the connection user ID for the mail server using a virtual keyboard. (ex.abcd@abcdefg.com)
- **PASSWORD:** To set the connection password for the mail server using a virtual keyboard.
- **MAIL TO:** Enter the appropriate email address to enable sending e-mail reports using a virtual keyboard.
- **MAIL FROM:** To set the mail address sent to the destination host using a virtual keyboard.

10-6. SECURITY

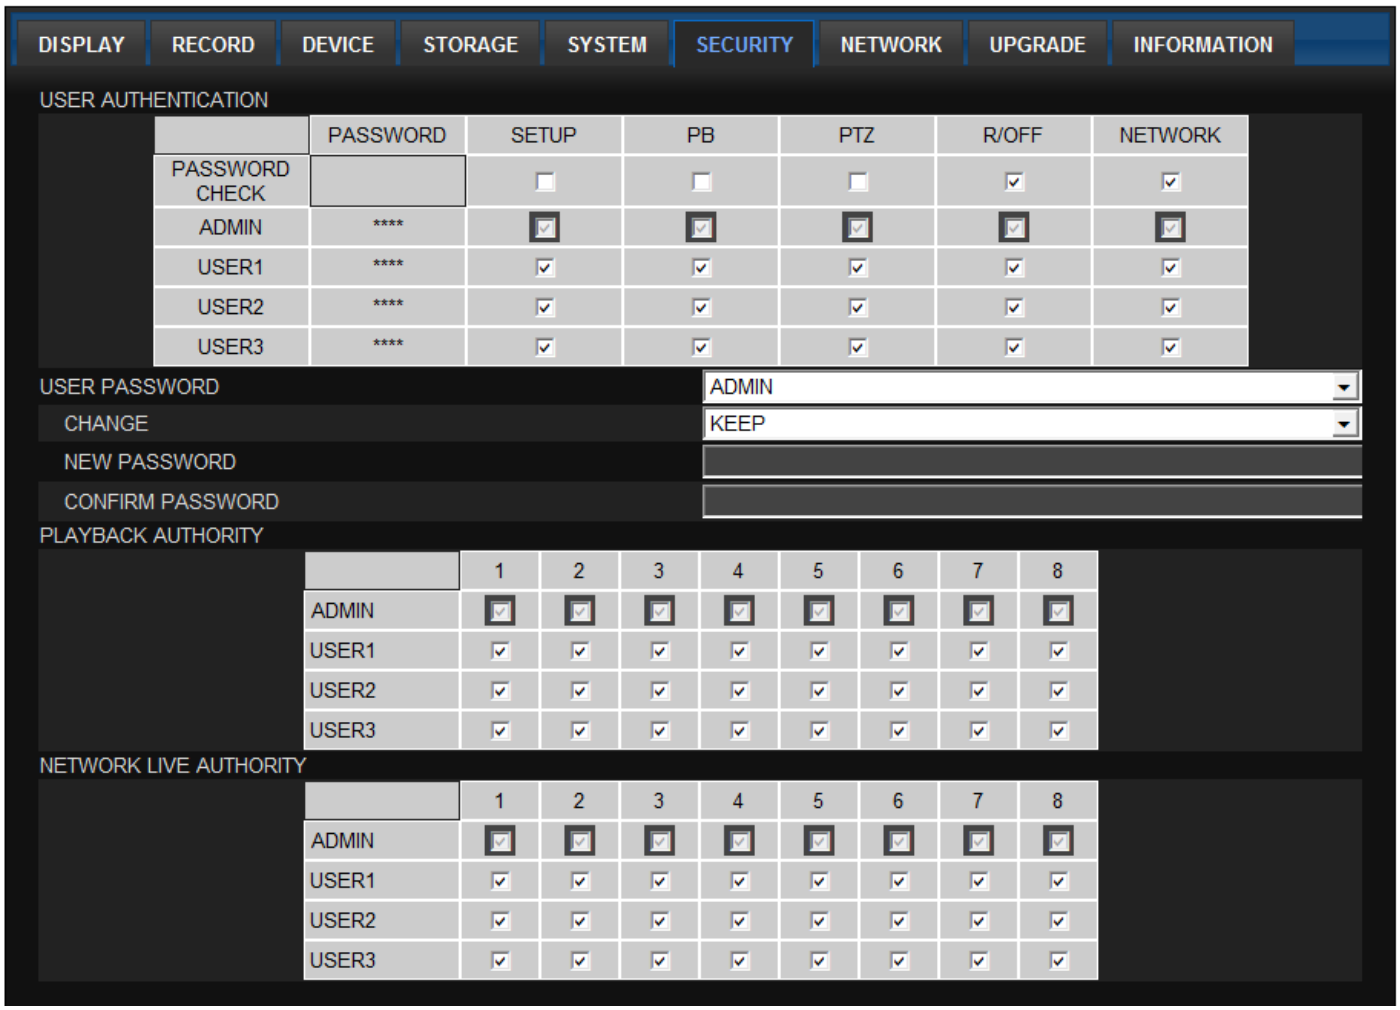

- **USER AUTHENTICATION** - Select either V or nothing for the functions such as **Setup, Playback(PB), PTZ, Record OFF(R/OFF), and Network**
- **USER PASSWORD** – Allows users to change the password.
- **PLAYBACK AUTHORITY** - Allows specific users AUTHORITY OF PLAYBACK per CHANNEL
- **NETWORK LIVE AUTHORITY** - Allows specific users NETWORK LIVE AUTHORITY per CHANNEL

10-7. NETWORK

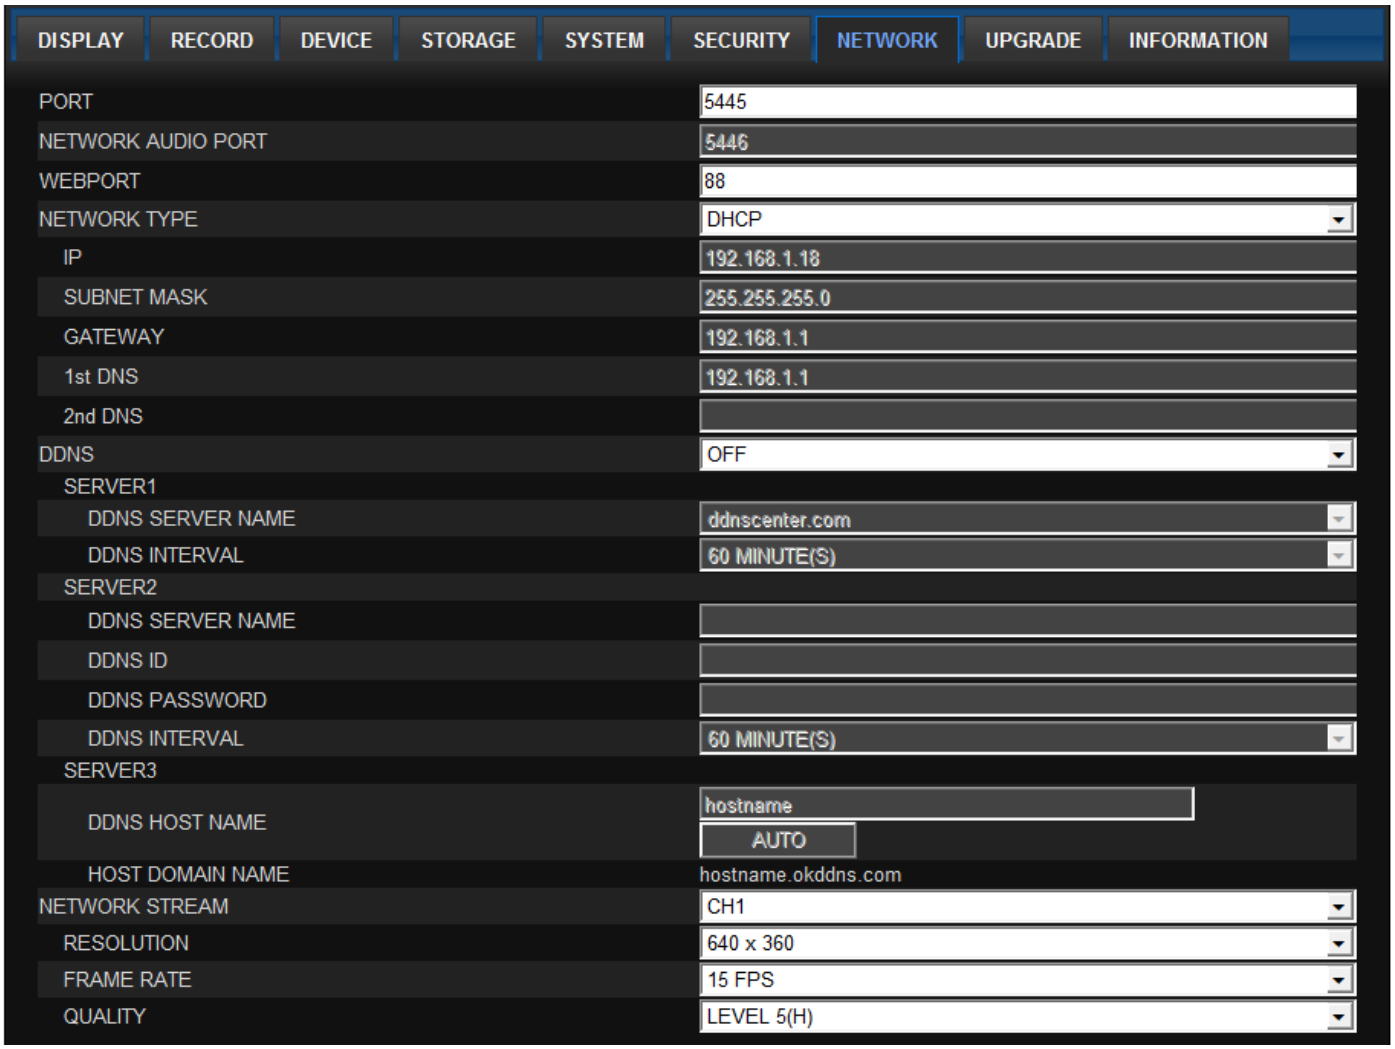

- **PORT –** NETWORK PORT (Allows the user to change the DVR PORT)
  NOTE: The DEFAULT PORT is used as a primary port to create remote connections.
- **WEBPORT –** WEB PORT (Allows the user to change the WEB PORT)
- **NETWORK TYPE –** DHCP, LAN (Allows the user to select between DHCP and LAN NETWORK TYPE)
  - **IP –** Enter IP address if NETWORK TYPE is set to LAN.
  - **SUBNET MASK –** Enter SUBNET MASK address if NETWORK TYPE is set to LAN.
  - **GATEWAY –** Enter GATEWAY address if NETWORK TYPE is set to LAN.
  - **1ST DNS –** Enter Primary DNS server address if NETWORK TYPE is set to LAN.
  - **2ND DNS –** Enter Secondary DNS server address if NETWORK TYPE is set to LAN.
- **DDNS –** OFF, ON (Allows the user to turn DDNS OFF OR ON)
  - **DDNS SERVER 1 –** Allows user to use the “DDNSCENTER.COM”.
  - **DDNS SERVER 2 –** Allows the user to user a specific DDNS SERVER.
    - **DDNS ID –** Allows the user to enter specific DDNS ID.
    - **DDNS PASSWORD –** Allows the user to enter specific DDNS PASSWORD.

- **DDNS INTERVAL –** 5 MINUTES ~ 60 MINUTES (Allows the user to set DDNS INTERVAL)

  - **DDNS SERVER 3 – Reserved for future use.**

- **NETWORK STREAM –** Allows the user to set the following NETWORK STREAM settings; RESOLUTION, FRAME RATE, QUALITY per CHANNEL.
  - **RESOLUTION –** Allows the user to set for NETWORK STREAMING RESOLUTION
  - **FRAME RATE –** Allows the user to set the FRAME RATE
  - **QUALITY –** Allows the user to set the image QUALITY from 1 ~ 5 for NETWORK QUALITY

NOTE: NETWORK STREAM settings do not affect the DVR's recording settings.

10-8. REMOTE UPGRADE

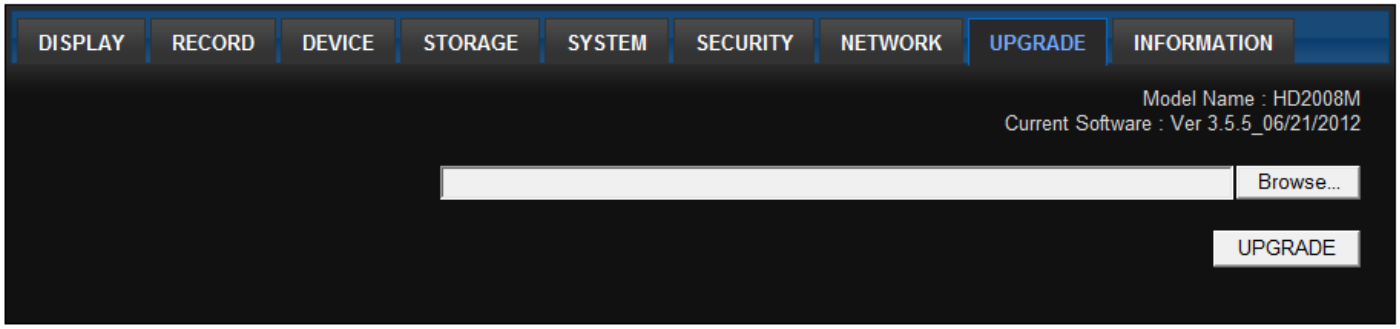

- **BROWSE –** Browse within the PC to look up a firmware upgrade file.
- **UPGRADE –** Allows the user to upgrade firmware with selected file.

10-9. INFORMATION

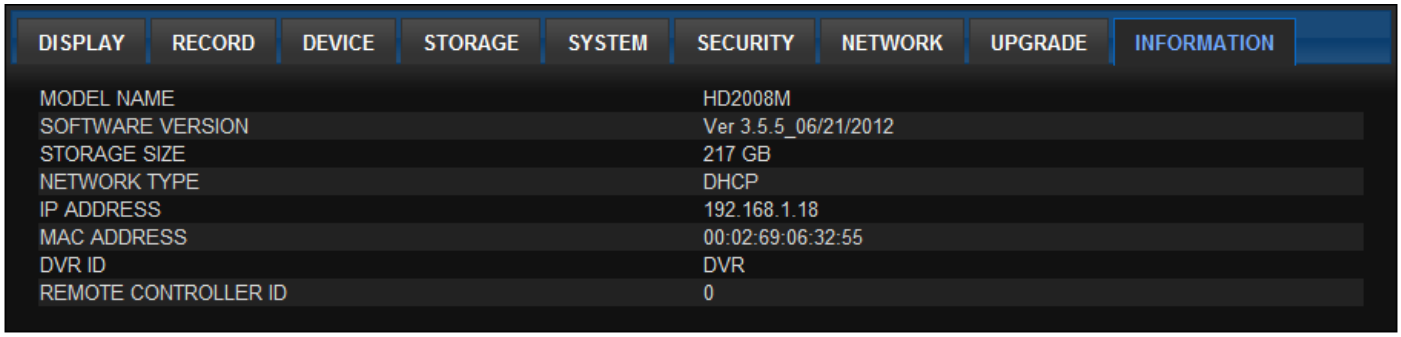

Shows the system information.

11. Mobile Phone Viewer

11-1. Installing the Viewer

1. Search “iUMS” in the App Store© or the Android Market©

2. Install the “iUMS” app. Then iUMS icon will be display on the phone.

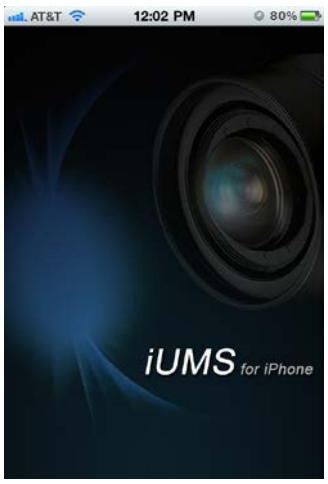

Notice

3G Data Usage applied without Wi-Fi connection. Please check with your Phone Carrier.

11-2. Viewer for Android

11-2-1. Live

1. Open the installed “iUMS” App and select the Live Preview. Then click the menu button of the phone to add a remote device.

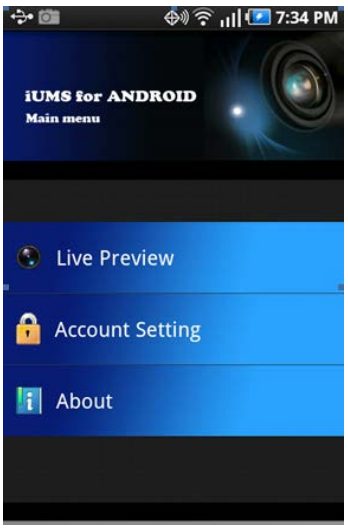

2. Select the registered device and select the channels to monitor up to 4 channels. Then press SELECT button.

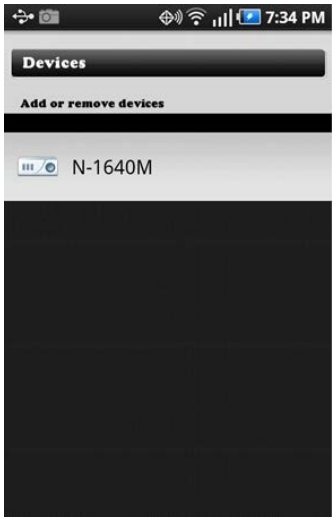

3. The app will display the selected channel(s). Double tap the channel screen to switch 1 channel display to 4 channels split display or vice versa.

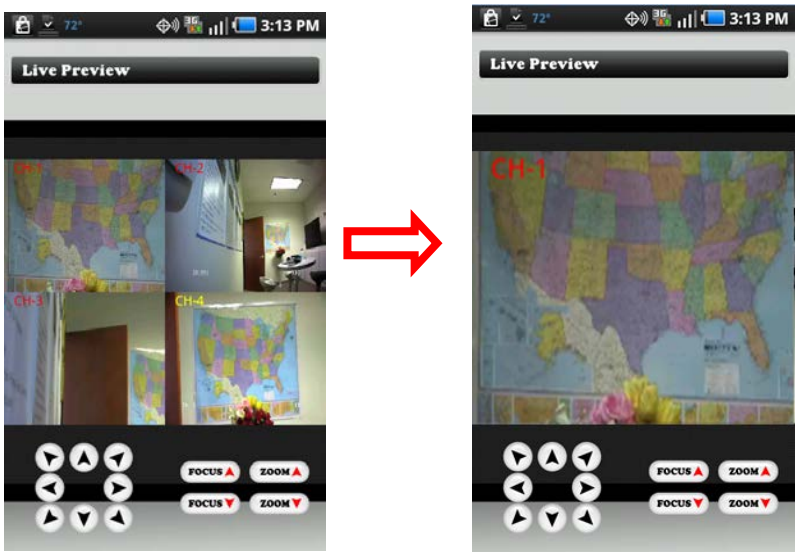

11-2-2.PTZ Control

To control the PTZ function of the camera, tap the channel screen, then the channel name will be Yellow. Using PTZ menu icons on the screen, control PTZF control.

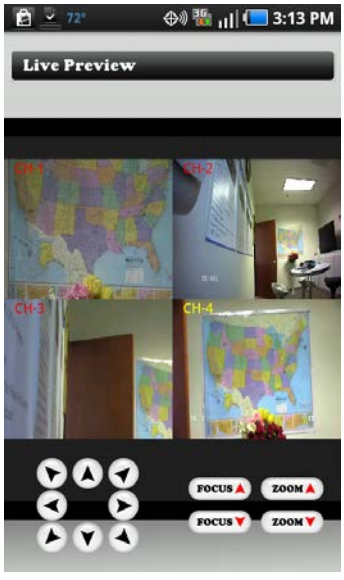

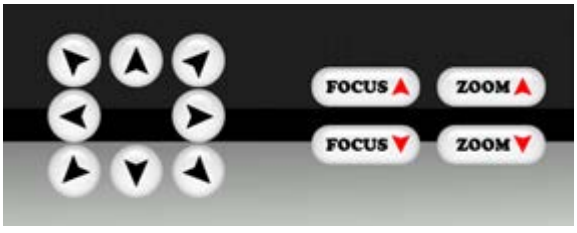

11-2-3. Playback

1. Select the registered device and select PLAYBACK mode and click ‘START’. Then the search window will display.

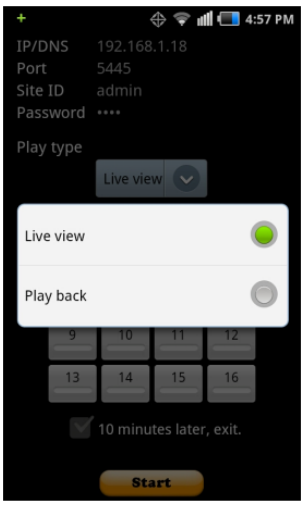

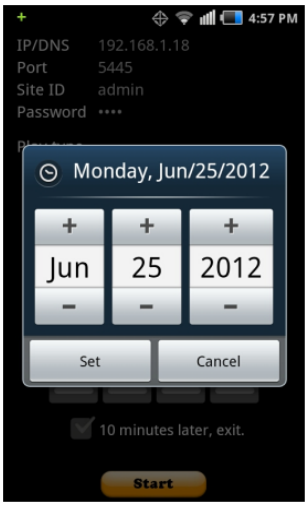

2. Select the date, hour, minute and click ‘SET’.

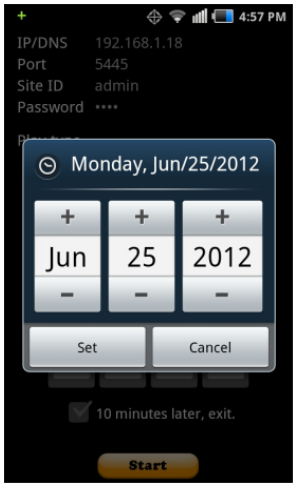

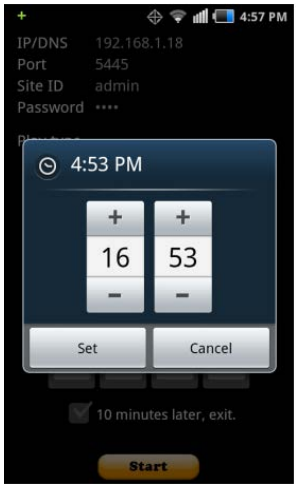

3. Then playback screen and menu icons will display.

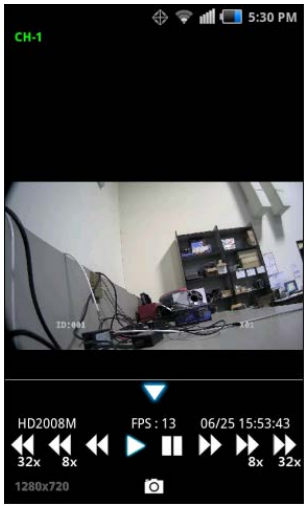

11-2-4. Screen Shot and Viewer

To capture live and playback screen, click capture button .

To search and view the captures image, click SCREEN SHOT VIEWER button.

11-3. Viewer for iPhone

11-3-1. Live

1. Open the installed “iUMS” App and select the Live Preview. Then click the menu button of the phone to add a remote device.
2. Select the registered device and select the channels to monitor up to 4 channels. Select Mode as ‘Live’ and click ‘Connect’ .

3. The app will display the selected channel(s). Double tap the channel screen to switch 1 channel display to 4 channels split display or vice versa.

11-3-2.PTZ Control

To control the PTZ functions of the camera, tap the menu button. Then PTZ menu icons will display. Using the PTZ icon on the screen, control PTZF control.

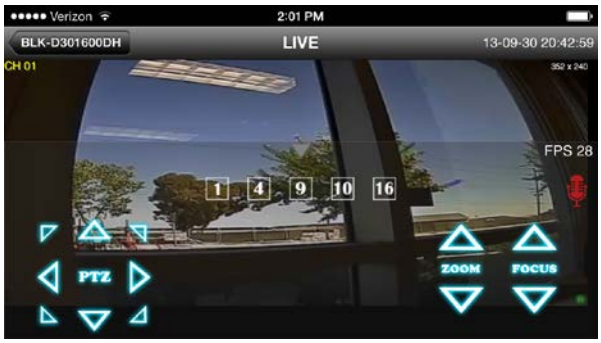

11-3-3. Playback

1. Select the registered device and select the channels up to 4 channels to search and playback. Select Mode as 'Playback' Playback and click 'Connect' . Then the search window will display.

2. Select the date, hour, minute, AM/PM and click 'Connect & Play' .

3. The app will display the selected channel(s). Double tap the channel screen to switch 1 channel display to 4 channels split display or vice versa.

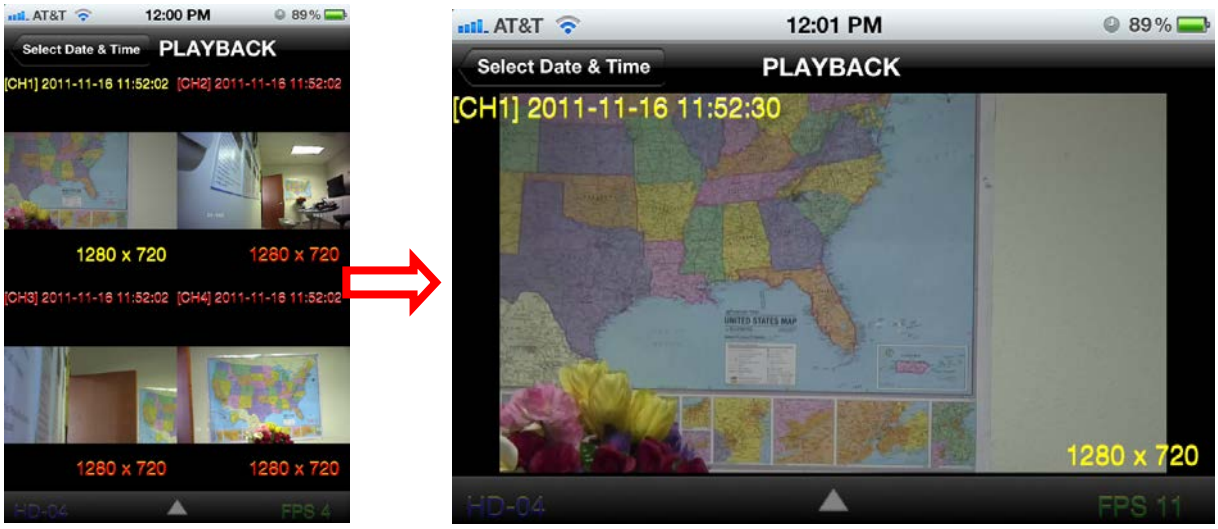

4. Tap the menu button. Then Playback menu icons will display.

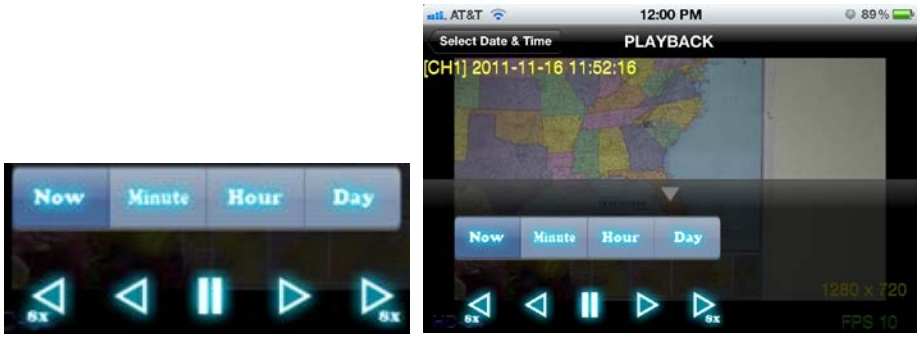

APPENDIX

NETWORK SETUP

Network IP address must be configured on the DVR before remote connection.

- To setup an IP address, select DHCP or STATIC on NETWORK TYPE.
  - If **DHCP** is selected, the DVR will automatically retrieve an IP information from a router.
  - If **STATIC** is selected, all IP information (IP, SUBNET MASK, GATEWAY, DNS addresses) must be manually configured.

If the DVR is installed under firewall / gateway / router / modem-router combo LAN.

- If your DVR is on LAN (using private IP address), the following TCP port must be open and forwarded to the IP address of the DVR.
  - **PORT** (Default Port: 5445)
  - **NETWORK AUDIO PORT** (Default Port: 5446)
  - **WEB PORT** (Default Port: 80) must be open and forwarded to the IP address of the DVR.
- Please refer to the firewall / gateway / router user manual or consult with your IT personnel.

NETWORK SETUP – Using Manufacturer's DDNS

Free DDNS service for Dynamic IP users is provided. Please follow the instruction if your public IP address is a dynamic IP.

4. Select **DDNS** as **SERVER1** and click button. Then the DDNS menu will display.

- **Automatic Host name registration:** Click AUTO button. Then the MAC Address of DVR will be registered automatically as a host name on DDNS.

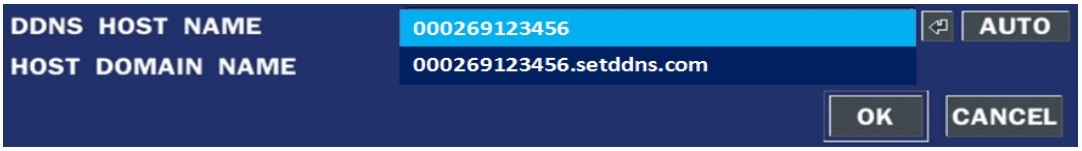

- **Manual Host name registration:** Click button. Then the keyboard window will display.

5. Click OK and save the configuration.
6. Check the status of the DDNS registration on the popup window.

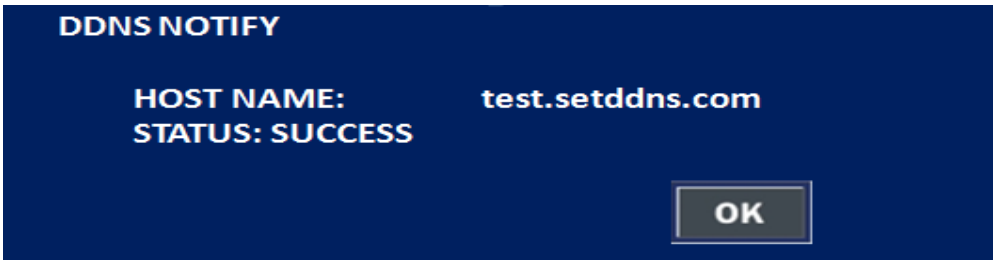

NETWORK SETUP – Using Public DDNS

If you want to use other third party DDNS like “dyndns.org”, please follow the instruction.

1. Select **DDNS** as **SERVER2** and click button. Then the DDNS menu will display.

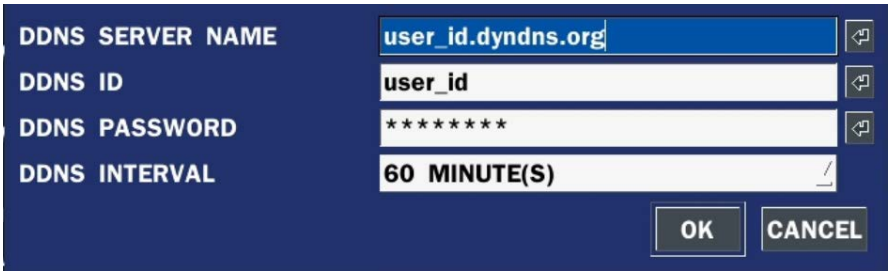

2. Click button. Then the keyboard window will display. Then, input DDNS SERVER NAME, DDNS IP, and DDNS PASSWORD.

7. Click OK and save the configuration.
8. Check the status of the DDNS registration on the popup window.

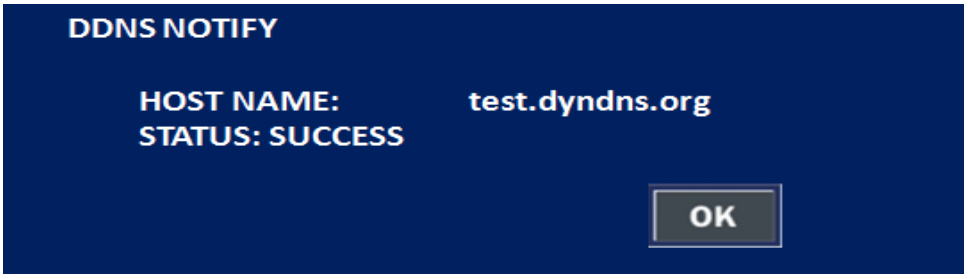

NETWORK ACCESS via MOBILE PHONE

iOS and Android OS Phones application is available from the App Store /Google Play Store. Search for “iUMS” and install the application on your phone.

- **iPhone / iPad:** Tap + icon for SITE ADDITION. In the SITE INFORMATION, enter the following information; SITE, IP/DNS, PORT, ID, PASSWORD. Tap SAVE to save the SITE.
- **Android Phone:** Tap Add icon for SITE ADDITION. In the SITE INFORMATION, enter the following information; SITE, IP/URL, PORT, ID, PASSWORD. Tap ADD to save the SITE.

[Site Add]

[Live Connect]

[Live-Multi Channel]

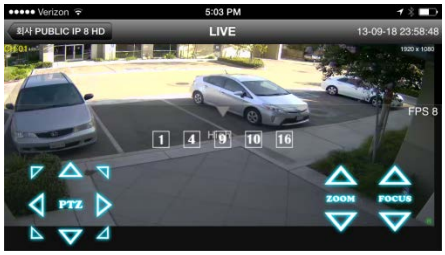

[Live-Single Channel with PTZ]

[Playback Connect]

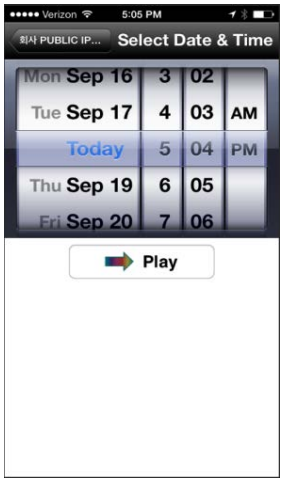

[Playback-Calendar]

[Playback-Multi-Channel]

NETWORK ACCESS via WEB BROWSER

Using “Internet Explorer”

1. Make sure **‘Popup’** is enabled from Internet Explorer.
2. Open Internet Explorer and enter the IP address or the domain name of the DVR to open the Web Client. If the ActiveX of Web Client Viewer is not installed in the PC, the below message will display.

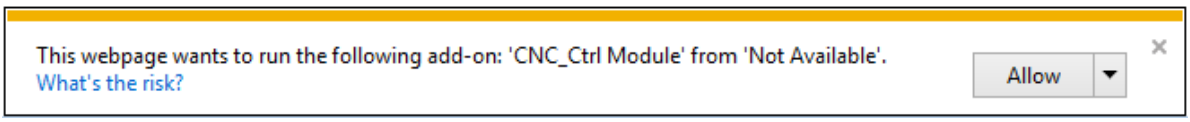

3. Install the ActiveX when prompted.

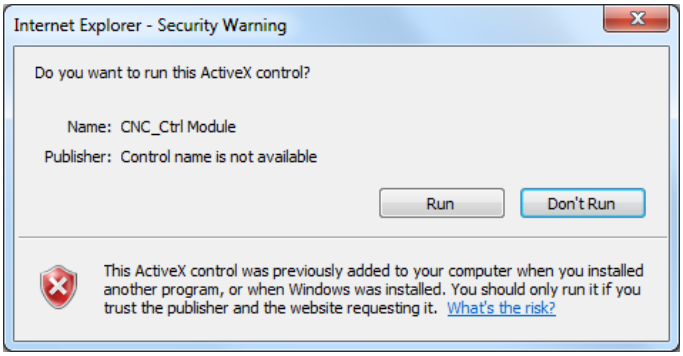
Internet Explorer - Security Warning
Do you want to run this ActiveX control?
Name: CNC_Ctrl Module
Publisher: Control name is not available
Run
Don't Run
This ActiveX control was previously added to your computer when you installed another program, or when Windows was installed. You should only run it if you trust the publisher and the website requesting it. What's the risk?

4. When the ActiveX of Web Client Viewer is properly installed in the PC, Web Client Viewer will display.

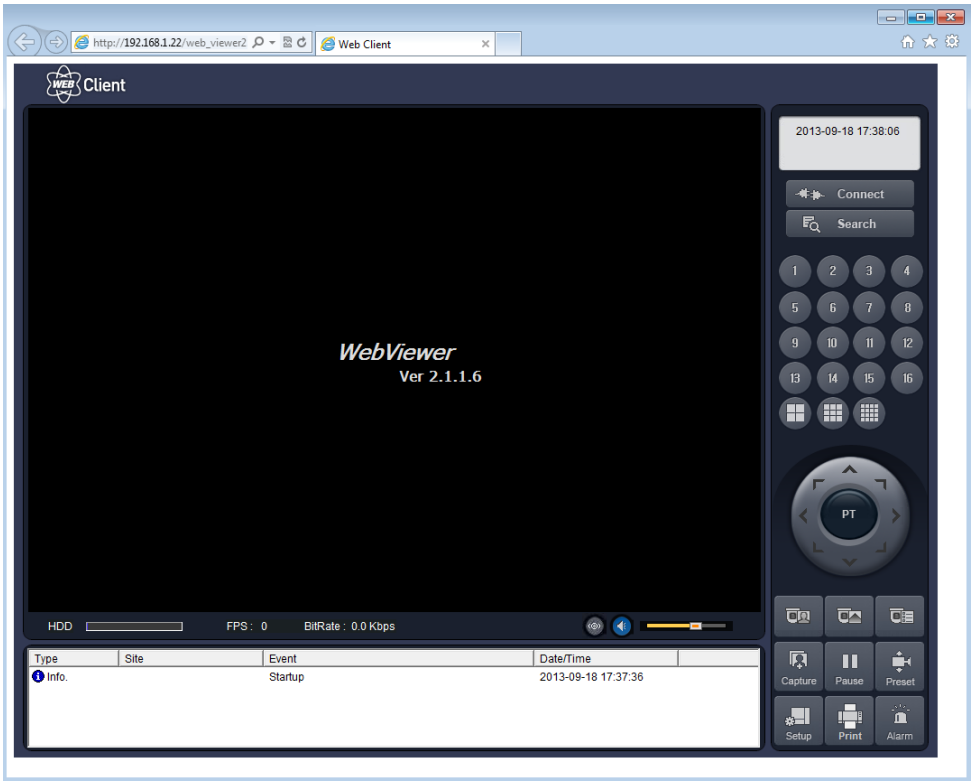

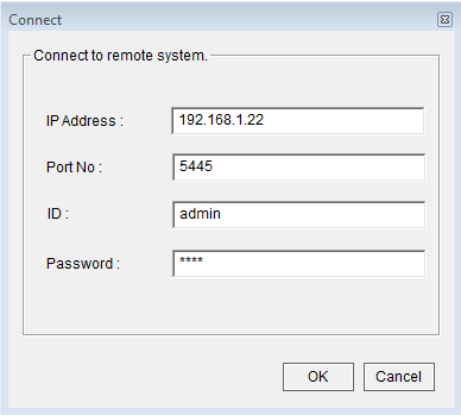

5. Click on the button to open Login window.

6. Enter the DVR Port, DVR ID, and the DVR Password.
7. Click on the OK button to connect a remote site.

> ❖ Note: Internet Explorer 64bit is not compatible.

NETWORK ACCESS via WEB BROWSER

Using “Chrome, Firefox, or Safari”

1. Open a browser and enter the IP address or the domain name of the DVR to open the Web Client. If the Plugin of Web Client Viewer is not installed in the PC, the below message will display.

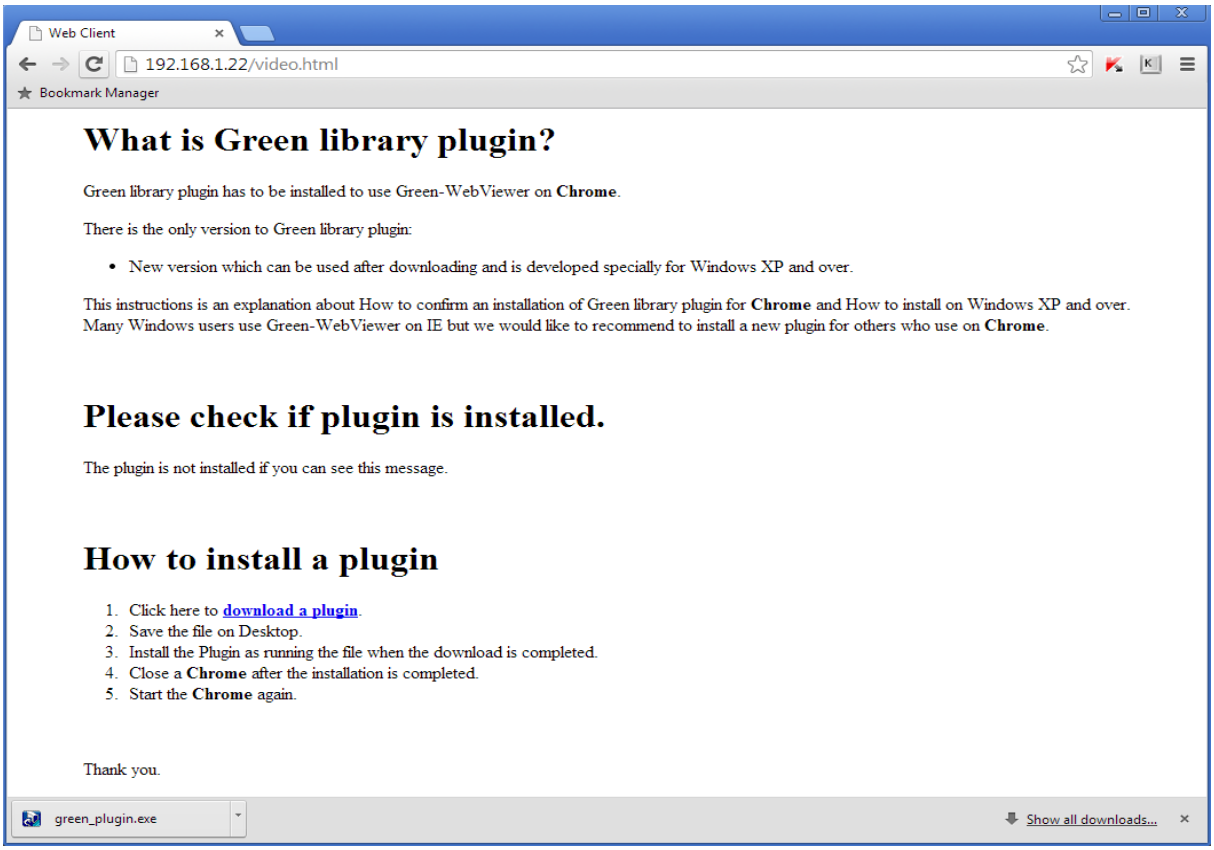
Web Client
192.168.1.22/video.html
Bookmark Manager
What is Green library plugin?
Green library plugin has to be installed to use Green-WebViewer on Chrome.
There is the only version to Green library plugin:
New version which can be used after downloading and is developed specially for Windows XP and over.
This instructions is an explanation about How to confirm an installation of Green library plugin for Chrome and How to install on Windows XP and over.
Many Windows users use Green-WebViewer on IE but we would like to recommend to install a new plugin for others who use on Chrome.
Please check if plugin is installed.
The plugin is not installed if you can see this message.
How to install a plugin
1. Click here to download a plugin.
2. Save the file on Desktop.
3. Install the Plugin as running the file when the download is completed.
4. Close a Chrome after the installation is completed.
5. Start the Chrome again.
Thank you.
green_plugin.exe
Show all downloads...

2. Download and Install the ‘green_plugin.exe’.



3. When the plugin of Web Client Viewer is properly installed in the PC, Web Client Viewer will display.

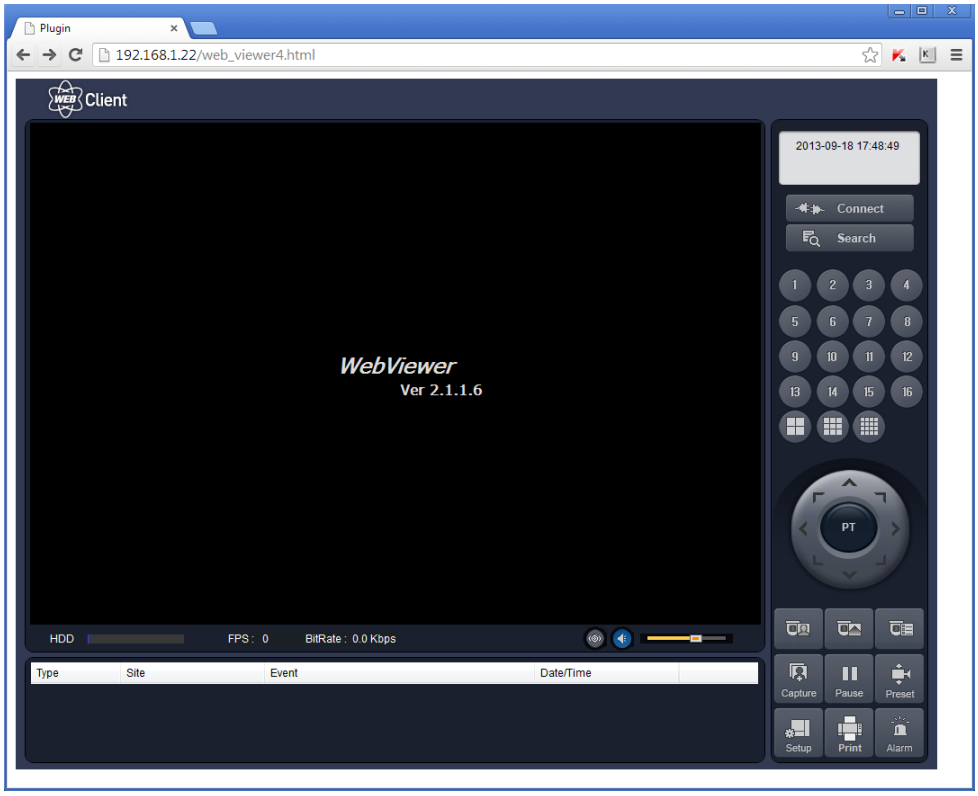

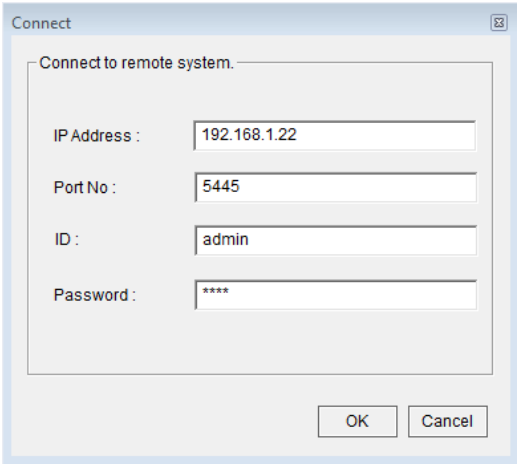

4. Click on the button to open Login window.

5. Enter the DVR Port, DVR ID, and the DVR Password.
6. Click on the OK button to connect a remote site.

How to make a backup

1. Insert a USB flash drive in the USB port on the DVR.
2. Right click on the main screen and click on the SEARCH to open the SEARCH menu.

3. Find the specific date and time of the target video, using a search menu.

4. Move the mouse pointer to the bottom of the screen and the following SEARCH bar will appear.

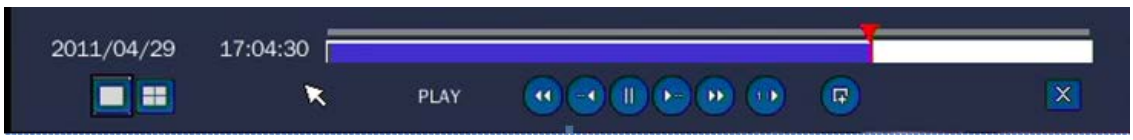

5. Click on the BACKUP button to open the BACKUP window.

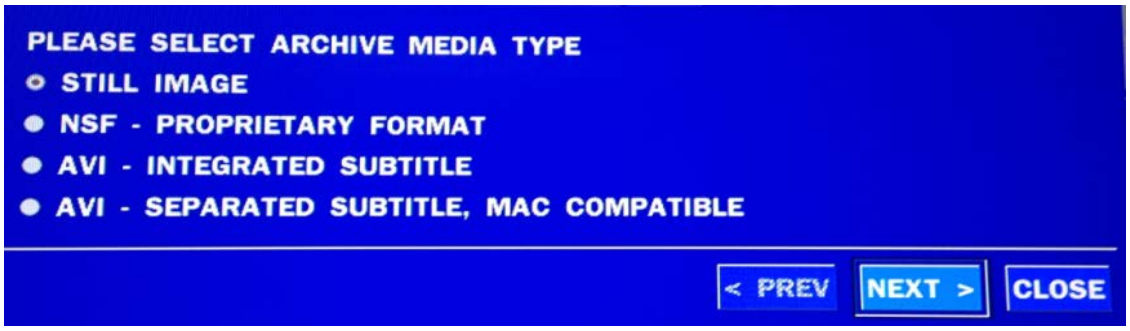

6. Select STILL IMAGE, NSF, or AVI format.
7. Select USB STICK for a BACKUP less than an hour, or select USE HDD for a BACKUP for more than an hour.
8. Select the desired channel number.
9. Enter the desired BACKUP duration.

How to playback a Proprietary Format video in PC

1. Insert a USB flash drive in the USB port on the PC.

2. Run HDPlayer HDPlayer in ‘DvrPlayer’ folder.

3. Click Button to search the backup video clip.

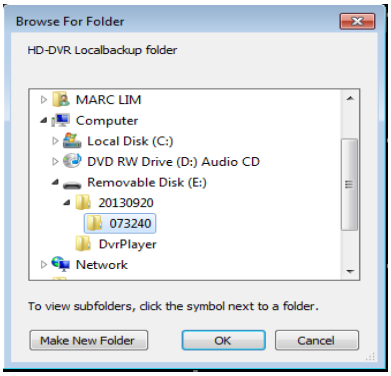

4. Select the target folder that has backup video clip. Then the player will play the video.

DVR Compatible Hard Disk Drives

Company	Model	Capacity	RPM	BUFFER
	ST2000VM003	2 TB	5900 RPM	64 MB
	ST2000VM002	2 TB	5900 RPM	64 MB
	ST2000DL003(barracuda green)	2 TB	5900 RPM	64 MB
	ST32000641AS(Barracuda XT)	2 TB	7200 RPM	64 MB
	ST2000DM001	2 TB	7200 RPM	64 MB
	ST1000VX000	1 TB	7200 RPM	64 MB
	ST1000VM002 [fw: sc12]	1 TB	5900 RPM	64 MB
	ST1000DM003	1 TB	7200 RPM	64 MB
	ST31000524AS(barracuda 7200.12)	1 TB	7200 RPM	32 MB
	ST31000322CS(pipeline)	1 TB	5900 RPM	8 MB
	ST31000526SV(Surveillance)	1 TB	7200 RPM	32 MB
	ST31000524AS(Barracuda)	1 TB	7200 RPM	32 MB
	ST31000340SV(Surveillance)	1 TB	7200 RPM	32 MB
	ST31000528AS(Barracuda)	1 TB	7200 RPM	32 MB
	ST3500312C8	500 GB	5900 RPM	8 MB
	ST500DM002(barracuda)	500 GB	7200 RPM	16 MB
	ST3500312CS(pipeline)	500 GB	5900 RPM	8 MB
	ST3500411SV(Surveillance)	500 GB	7200 RPM	16 MB
	ST3500413AS(Barracuda)	500 GB	7200 RPM	16 MB
	ST3500830SCE	500 GB	7200 RPM	8 MB
	ST3500418AS(Barracuda)	500 GB	7200 RPM	16 MB
	ST3500410AS(Barracuda)	500 GB	7200 RPM	16 MB
	ST250DM000(barracuda)	250 GB	7200 RPM	16 MB
	ST3250312CS(pipeline)	250 GB	5900 RPM	8 MB
	ST3250410AS(Barracuda)	250 GB	7200 RPM	16 MB
	ST3250310SV(Surveillance)	250 GB	7200 RPM	8 MB
	ST3250318AS(Barracuda)	250 GB	7200 RPM	8 MB
	ST3160815AS(Barracuda)	160 GB	7200 RPM	8 MB
HITACHI	HDS723020BLA642	2 TB	7200 RPM	64 MB
	HDS722020ALA330	2 TB	7200 RPM	32 MB
	HDS721010DLE630	1 TB	7200 RPM	32 MB
	HDS721010KLA330	1 TB	7200 RPM	32 MB
	HDT721010SLA360	1 TB	7200 RPM	16 MB
	HDS721010CLA332	1 TB	7200 RPM	32 MB
	HDS721050DLE630	500GB	7200 RPM	32 MB
	HDS721050CLA362	500 GB	7200 RPM	16 MB
	HDP725050GLA360	500 GB	7200 RPM	16 MB

	HDS721032CLA362	320 GB	7200 RPM	16 MB
	HDS721025CLA382	250 GB	7200 RPM	8 MB
	HDT721025SLA380	250 GB	7200 RPM	8 MB
	HDP725025GLA380	250 GB	7200 RPM	8 MB
Western Digital	WD20EURS-63SPKY0	2 TB	5400 RPM	64 MB
	WD5000AAKX-00ERMA0	500 GB	7200 RPM	16 MB
	WD5000AVCS-632DY1	500 GB	5400 RPM	32 MB
	WD10EZEX-00RKKAO	1 TB	7200 RPM	64 MB
	WD20EARS	2 TB	5900 RPM	64 MB
	WD20EARX(00PASB0)	2 TB	5900 RPM	65 MB
	WD20EADS	2 TB	5400 RPM	32 MB
	WD20EURS	2 TB		64 MB
	WD10EURX(63FH1Y0)	1 TB	5400 RPM	64 MB
	WD10EZRX(00A8LB0)	1 TB	5400 RPM	64 MB
	WD10EARS(00Y5B1 Caviar Green)	1 TB	5400 RPM	64 MB
	WD10EVDS(63U8B1)	1 TB	7200 RPM	32 MB
	WD10EALX(229BA1)	1 TB	7200 RPM	32 MB
	WD10EALX(009BA0)	1 TB	7200 RPM	32 MB
	WD10EVVS	1 TB	5400 RPM	8 MB
	WD10EACS	1 TB		16 MB
	WD10EUCX	1 TB		16 MB
	WD10EURS(630AB1)	1 TB	5900 RPM	64 MB
	WD5000AAKX(221CA1 Caviar Blue)	500 GB	7200 RPM	16 MB
	WD5000AAKX(001CA0)	500 GB	7200 RPM	16 MB
	WD5000AVCS	500 GB		16 MB
	WD5000AACS	500 GB	5400 RPM	16 MB
	WD2500AVVS(63L2B0)	250 GB		
	WD2500AAKX	250 GB	7200 RPM	16 MB
	WD2500AVVS	250 GB		8 MB
	WD2500AAKS	250 GB	7200 RPM	16 MB
TOSHIBA	HDS723020BLE640	2 TB	7200 RPM	64 MB